

CLTI Differential Equation

-

Copyright (c) 2011 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".

Please send corrections (or suggestions) to youngwlim@hotmail.com.

This document was produced by using OpenOffice and Octave.

Causal LTI Systems (1)

$$a_N \frac{d^N y(t)}{dt^N} + a_{N-1} \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_1 \frac{dy(t)}{dt} + a_0 y(t) = b_M \frac{d^M x(t)}{dt^M} + b_{M-1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_1 \frac{dx(t)}{dt} + b_0 x(t)$$

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$Q(D) y(t) = P(D) x(t)$$

$$M = N$$

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_0 \frac{d^M x(t)}{dt^M} + b_1 \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (b_0 D^M + b_1 D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$Q(D) y(t) = P(D) x(t)$$

Causal LTI Systems (2)

$$a_N \frac{d^N y(t)}{dt^N} + a_{N-1} \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_1 \frac{dy(t)}{dt} + a_0 y(t) = b_M \frac{d^M x(t)}{dt^M} + b_{M-1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_1 \frac{dx(t)}{dt} + b_0 x(t)$$

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$Q(D)y(t) = P(D)x(t)$$

- Zero Input Response
- Zero State Response (Convolution with $h(t)$)
- Natural Response (Homogeneous Solution)
- Forced Response (Particular Solution)

Zero Input Response $y_0(t)$ – (1)

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$Q(D)y(t) = P(D)x(t)$$

$$Q(D)y_0(t) = 0$$



$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y_0(t) = 0$$

Linear combination of $y_0(t)$ and its derivatives = 0

if and only if

$$y_0(t) = ce^{\lambda t}$$

$$\dot{y}_0(t) = c\lambda e^{\lambda t}$$

$$\ddot{y}_0(t) = c\lambda^2 e^{\lambda t}$$

...

$$Q(\lambda) = 0$$



$$\underbrace{(\lambda^N + a_1 \lambda^{N-1} + \dots + a_{N-1} \lambda + a_N)}_{= 0} \underbrace{ce^{\lambda t}}_{\neq 0} = 0$$

Zero Input Response $y_0(t)$ – (2)

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N)y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N)x(t)$$

$$Q(D)y(t) = P(D)x(t)$$

$$Q(D)y_0(t) = 0 \quad \Rightarrow \quad (D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N)y_0(t) = 0$$

$$Q(\lambda) = 0 \quad \Leftrightarrow \quad \underbrace{(\lambda^N + a_1 \lambda^{N-1} + \dots + a_{N-1} \lambda + a_N)}_{= 0} \underbrace{ce^{\lambda t}}_{\neq 0} = 0$$

$$Q(\lambda) = (\lambda^N + a_1 \lambda^{N-1} + \dots + a_{N-1} \lambda + a_N) = 0$$

$$Q(\lambda) = (\lambda - \lambda_1)(\lambda - \lambda_2) \dots (\lambda - \lambda_N)$$

λ_i characteristic roots

$$c_1 e^{\lambda_1 t} + c_2 e^{\lambda_2 t} \dots + c_N e^{\lambda_N t} = y_0(t)$$

$e^{\lambda_i t}$ characteristic modes

ZIR: a linear combination of the characteristic modes of the system

Zero State Response $y(t)$ – (1)

$$\begin{aligned}\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) &= b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t) \\ (D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) &= (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N) x(t) \\ Q(D) y(t) &= P(D) x(t)\end{aligned}$$

All initial conditions are zero

$$y(t) = x(t) * h(t) = \int_{-\infty}^{+\infty} x(\tau) y(t - \tau) d\tau$$

Impulse response $h(t)$

$$y(t) = \int_0^{+t} x(\tau) y(t - \tau) d\tau, \quad t \geq 0$$

Causality

causal system: Response cannot begin before the input

causal input: The input starts at $t=0$ $h(\tau) = 0 \quad \tau < 0$

causal $h(t)$: The causal system's response to a unit impulse cannot begin before $t=0$


$$h(t - \tau) = 0 \quad t - \tau < 0$$

Zero Input Response

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$Q(D)y(t) = P(D)x(t)$$

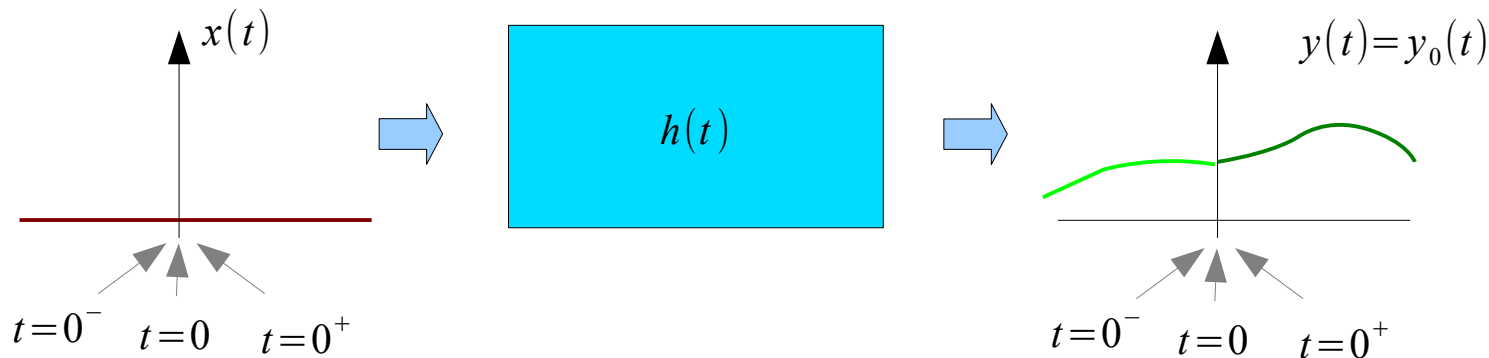

Input is zero

Only initial conditions
drives the system

$$y_0(0^-) = y_0(0) = y_0(0^+)$$

$$\dot{y}_0(0^-) = \dot{y}_0(0) = \dot{y}_0(0^+)$$




$$\ddot{y}_0(0^-) = \ddot{y}_0(0) = \ddot{y}_0(0^+)$$

Zero State Response

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$Q(D)y(t) = P(D)x(t)$$

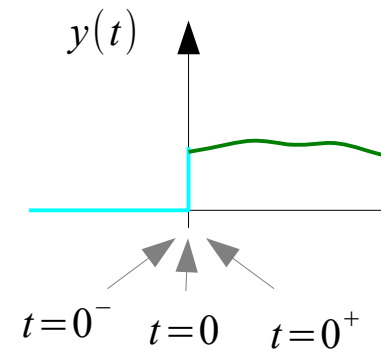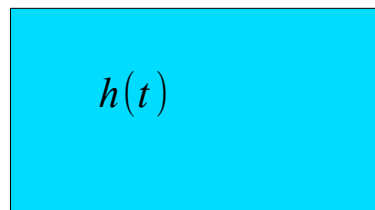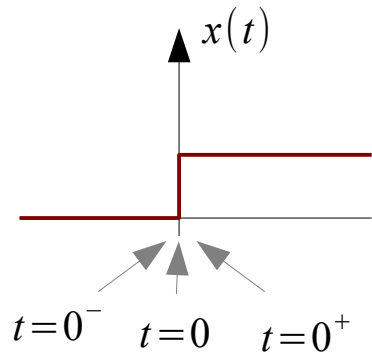




All initial conditions are zero

Total Response $y(t)$

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N)y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N)x(t)$$

$$Q(D)y(t) = P(D)x(t)$$

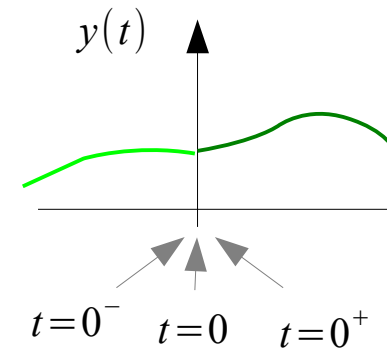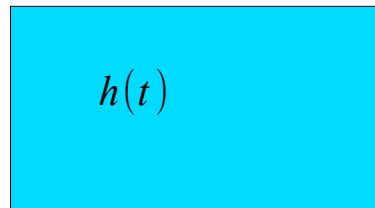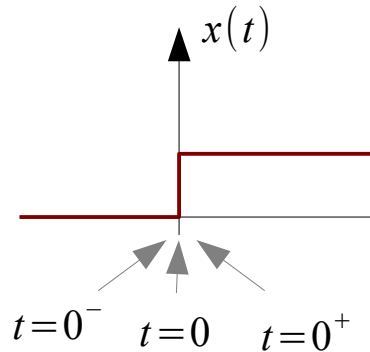

zero input response
+
zero state response

$$y(t) = y_0(t) \quad t \leq 0^-$$

because the input
has not started yet

$$y(0^-) = y_0(0^-)$$

$$\dot{y}(0^-) = \dot{y}_0(0^-)$$

The total response

$$y(0^-) = y(0^+)$$


$$\dot{y}(0^-) = \dot{y}(0^+)$$

Impulse Response $h(t)$

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_{N-M} \frac{d^M x(t)}{dt^M} + b_{N-M+1} \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$



$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N)y(t) = (D^M + b_{N-M+1} D^{M-1} + \dots + b_{N-1} D + b_N)x(t)$$

$$Q(D)y(t) = P(D)x(t)$$

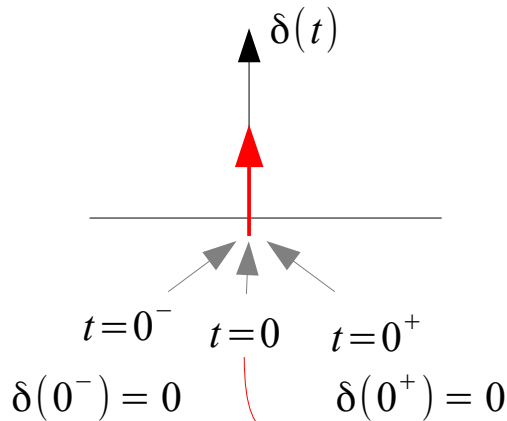

All init conditions are zero at $t=0^-$

Generates energy storage
 Creates nonzero initial condition at $t=0^+$

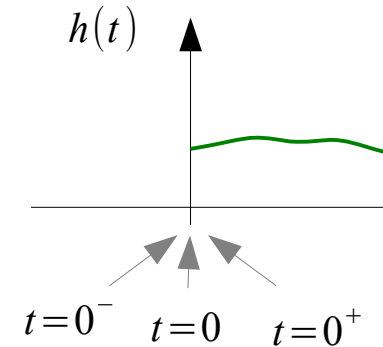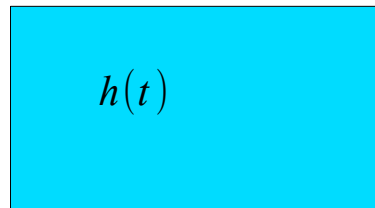

$h(t) =$ characteristic mode terms
 $t \geq 0^+$ ($t \neq 0$)

At $t=0$, at most impulse $A_0 \delta(t)$

Impulse Response $h(t)$

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_0 \frac{d^M x(t)}{dt^M} + b_1 \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (b_0 D^M + b_1 D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$M = N$$

$$Q(D)y(t) = P(D)x(t)$$

If $\delta(t)$ is included in $h(t)$

$$\frac{(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) h(t)}{\quad} = \frac{(b_0 D^M + b_1 D^{M-1} + \dots + b_{N-1} D + b_N) \delta(t)}{\quad}$$



The highest order term

$$\delta^{(N+1)}(t)$$



$$\delta^{(N)}(t)$$

contradiction

$h(t)$ cannot contain $\delta^{(i)}(t)$ at all
 $h(t)$ can contain at most $\delta(t)$

Simplified Impulse Matching Method

$$\frac{d^N y(t)}{dt^N} + a_1 \frac{d^{N-1} y(t)}{dt^{N-1}} + \dots + a_{N-1} \frac{dy(t)}{dt} + a_N y(t) = b_0 \frac{d^M x(t)}{dt^M} + b_1 \frac{d^{M-1} x(t)}{dt^{M-1}} + \dots + b_{N-1} \frac{dx(t)}{dt} + b_N x(t)$$

$$(D^N + a_1 D^{N-1} + \dots + a_{N-1} D + a_N) y(t) = (b_0 D^M + b_1 D^{M-1} + \dots + b_{N-1} D + b_N) x(t)$$

$$M = N$$

$$Q(D)y(t) = P(D)x(t)$$

$$h(t) = b_0 \delta(t) + [P(D)y_n(t)]u(t)$$

$y_n(t)$ Linear combination of characteristic modes
with the following initial conditions

$$y_n(0) = \dot{y}_n(0) = \ddot{y}_n(0) \cdots = y_n^{(N-2)}(0) = 0 \quad y_n^{(N-1)}(0) = 1$$

$$Q(D)y(t) = P(D)x(t)$$

$$P(D) \leftarrow 1$$

$$Q(D)w(t) = x(t)$$

$$Q(D)y_n(t) = \delta(t)$$

Impulse Response $h(t)$

References

- [1] <http://en.wikipedia.org/>
- [2] J.H. McClellan, et al., Signal Processing First, Pearson Prentice Hall, 2003
- [3] B.P. Lathi, Linear Systems and Signals (2nd Ed)