


## Device Address Assignment Guidelines

The following chart illustrates the device address assignment method. The most significant digit of an address is shown in the column to the left of the chart. The least significant digit of an address is shown in the row across the top of the chart. For example, the 2 block starting address is hex 40.

### Notes:

1. Only one device can be assigned to an address.
2. When the columns for devices with addresses 00 through 3B are full, use the work area (addresses 0C through 3F).
3. All addresses are shown in hexadecimal notation.

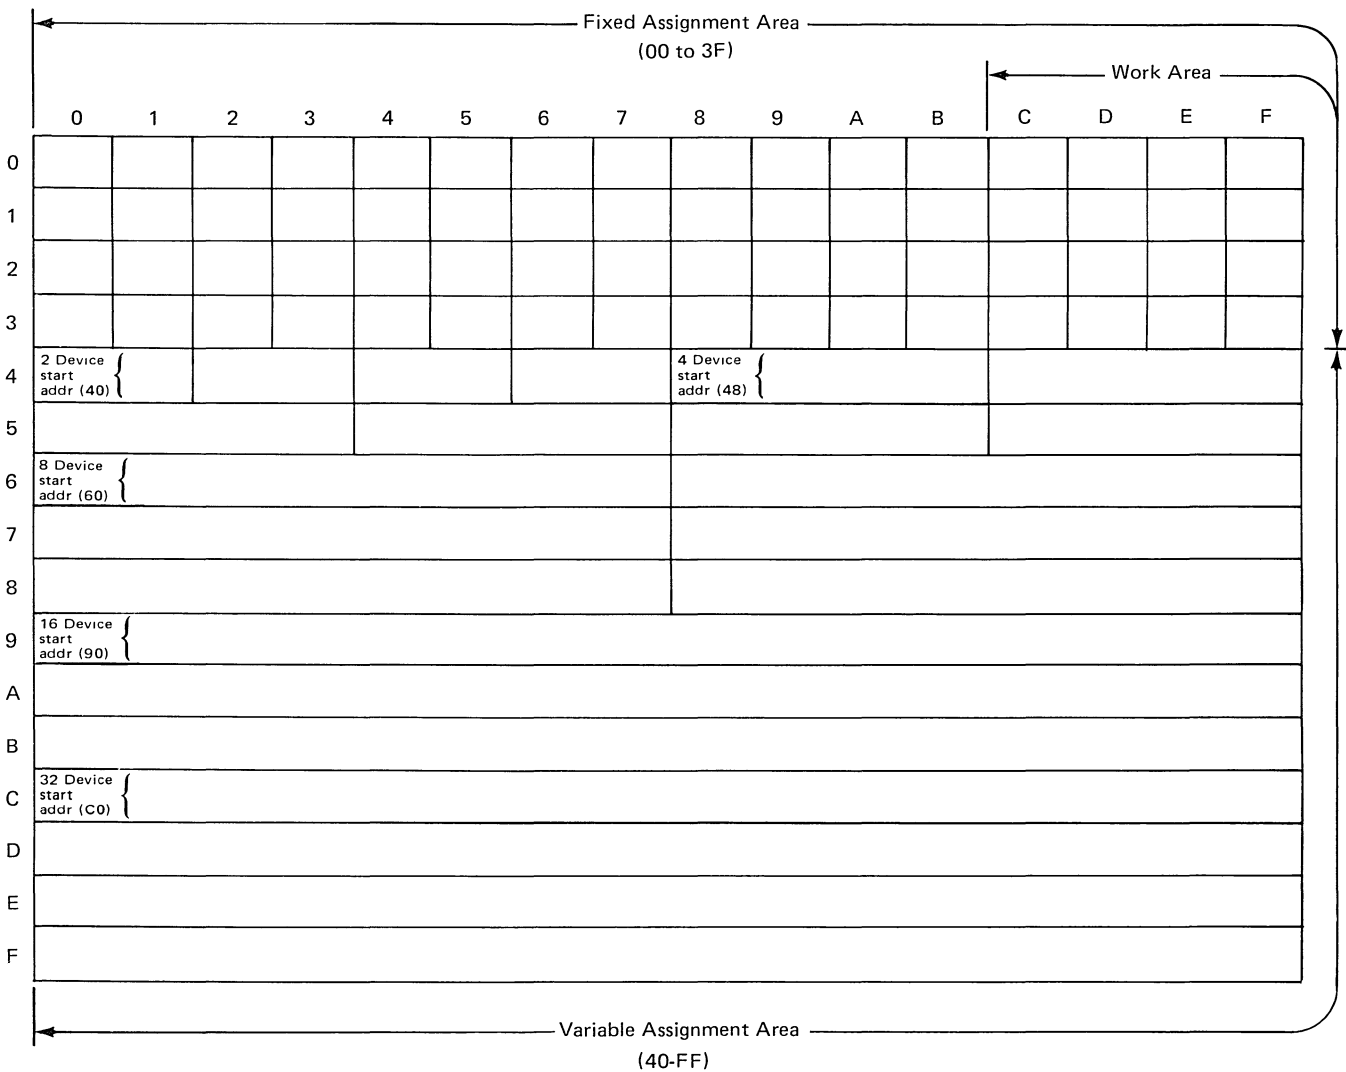

Sequence		Part	EC 374831				
7700AA	1 of 2	6826722	7-1-78				

