



# Wall Building

## Technical Brief

Building Advisory Service and Information Network

### The Use of Natural Slabby Stone Deposits for Wall Construction

#### Introduction

The most convenient stone source for building walls are layered rock outcrops. Their advantage is the uniformity which is lacking in boulders and cobbles deposits. Slabby stones are also easy to extract. The quarried slabs can be shaped with simple tools. They can be handled and transported without difficulties.

The term "slab", originally any massive rectangular piece of stone, is used in this context to describe rectangular units which are units larger than the size of bricks. For flooring or paving they are known as flagstones. Stone slabs, especially if regular and parallel, are the most sought after materials for stone structures particularly in areas with limited processing facilities for stone blocks. They are used for walls as building stones and for cladding. As an instant structural building material, natural slabs require only trimming to the required size on four sides before placement.

Apart from its use for walling when cut to size, a slab could also serve as a hearth of a fireplace, as a kitchen counter, as the floor or partition of a latrine, as paving slabs, wall panels, units to clad walls (known as facing slabs), etc.

#### Identifications of deposits

Slabs occur in outcrops or layers as thin bedded deposits whether igneous, metamorphic or sedimentary. Large slab deposits can dominate the rural and urban character and environment of structures in whole regions as for example in the Verona area in Italy. Ancient structures, retention walls, paths etc. often lead to slabby outcrops covered in time by surficial vegetation.

Slabby layers are not only convenient sources, they possess a flexibility for extraction and working, provided that the

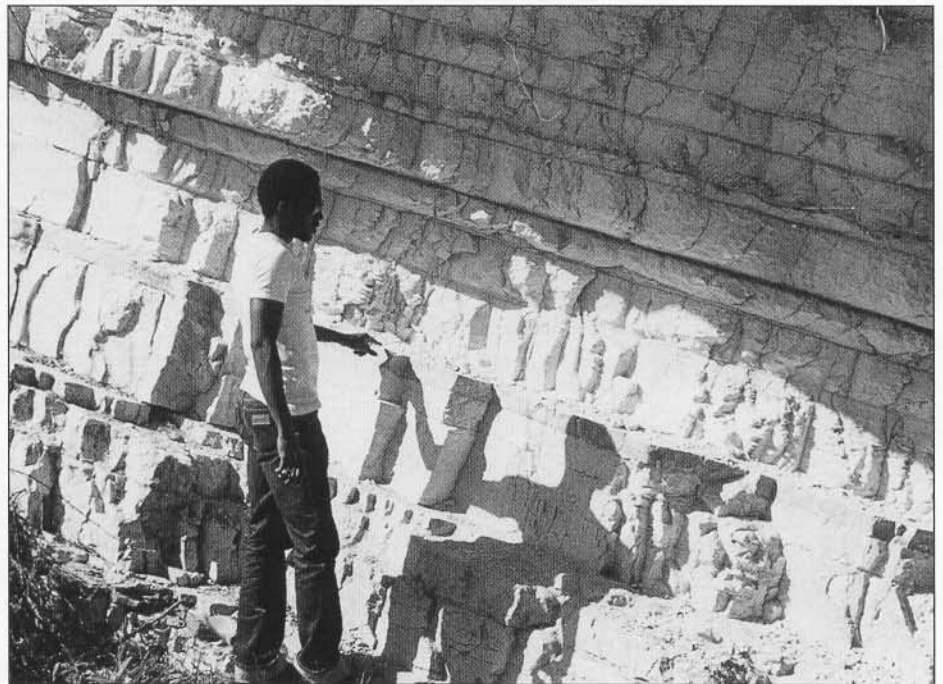


Figure 1: "Layered rock outcrops in Haiti"



Figure 2: "Near horizontal layers of Rodeador marble, Minas Gerais, Brazil, showing Karstic rills on well developed joints"



Figure 3: "Karstic features on joints and leverage with hammer leads"

dressed product meets the required standards and specifications. Deposits near any construction site, have proved to be the most economical, locally available building material. Popular thicknesses of slabby stones are not exceeding 20 cms.

### Extraction and shaping

Any overburden, when it is present, should be cleared manually rather than with a bulldozer to avoid crushing thinner stone layers, unless a wheeled shoveldozer is available. The plane of easiest splitting is sometimes called the clift, as distinct from the direction of easiest splitting, known as the rift, which is more likely to be identified on igneous rocks than on limestone and other sedimentary rocks.

Depending on the quarry and the nature of the layers, freely parting slabs are prised loose with crowbars, as for example in La Rioja, Argentina, where oolitic sandstone slabs of 2 to 7 cms thickness are produced.

For thicker slabs crowbars are no longer sufficient. These slabs are separated by vertical wedges and manipulated to make the best use of the natural properties of the stone. Generally the break is most successful when the weight is equal on

both sides of the wedge, standing up-right in the thicker beds, and pointing slightly away in thinner beds. The stone should be split into equal halves where possible. If one side is weaker, the blow will tend to run out towards the weaker side, causing an uneven break. Where drills are used, the wedge should be placed at least half of its length into the hole, but it should never reach the bottom. Delay between blows should be minimized, so that the whole row of wedges works as one. Firm and rapid blows are important, as extra hard blows will make a wedge fly out.

Where jackhammers are unavailable, holes can be made with a round steel crowbar about 1½ meters long and sharpened to a chisel edge, the barramina, or with jumper drills. Abrasives like a silica sand sludge speed up the drilling. Hole spacing and depth are dependent on how easily the material splits, and varies from quarry to quarry. To guide the line of fracture, tough or soft stones require deeper holes.

Alternatively, depending on the nature of the stone material, staggered pits or continuous grooves are preferred for straight breaks (when the drilling of holes would take more time than chasing). These are chased with a hammer and chisel. The groove tapers to the bottom, with the end finer than the edge of the breaking wedge. Wedges in many sizes are traditionally

the main tool for splitting stone or detaching stone masses by insertion in induced or natural cracks of joint cavities, similarly to those made for parting slabs.

In 40 to 60 cm thick slabby layers, a v-shaped groove or pit, about 10 to 15 cms deep, is chased along the whole length of the block to be cut. The pit is lined with scales, long strips of tin. Small wedges are then inserted. These are gently tapped with light sledgehammers until the stone splits. Chasing a continuous groove takes an hour per meter, although the actual splitting blows only last a few seconds. Accurate and true chasing prevents a faulty cut. Where available, plugs, more slender than the wedge, and feathers, with a taper corresponding to the plug, have now largely replaced wedges but need insertion holes. Quarry floors require meticulous cleaning by broom or compressed air, before a next layer of stone is removed; the larger sized stone waste is cleaned and then squared by guillotine.

### Dressing Slabs and Building Stones

Slabs are shaped by dressing, that is by slicing with a saw to be smoothed with chisels, or by rubbing with abrasive or harder stones and at times by applying a polished finish. Polished marble table

tops and kitchen counters are regularly crafted by hand on the island of Rombon in the Philippines. Counters, often matched with hand carved marble kitchen sinks and wash basins, are common fittings in Greece, Turkey and the eastern Mediterranean islands. In eastern Portugal thick granite slabs constitute whole facades in large buildings and are also important components in houses and cottages.

Flooring, stairways, steps and paving consume more slab material than any other type of construction. In flooring for latrines the slabs have a hole and are often made of slate as, for example, in the foothills of the Himalayas.

#### *Slabs in Foundations*

As already stated above, the use of slabby stones has the geometrical advantage over the use of boulders or irregular shaped stones. Slabby stones have natural parallel faces and require less fitting time. Otherwise the technique applied for its use in foundations is similar to that used for boulders. (ref. Technical Brief on "The Boulder Concept").

#### *Slabs in Dry Walling*

With slabby stone material, unlike with other stone shapes, the basic technology

for dry or mortared walls are akin. Dry walls are usually "monolithic" with or without a framework, whereas other types can vary from cavity walls to hybrids using various stone types and infillings together with an array of metal frameworks and anchorings. Dry walls are more intricate.

Slabs for use in dry walls are normally 30 cms wide and 7 to 20 cms thick in various lengths. The wall building technique is similar to mortared wall construction, using less wide and shorter stones.

#### **Wall Building**

The shape and dressing of local slabby stones depends on the skill of the stone mason and the use on the skill of the builder. The two construction methods for slabby stone walls are based on filling a framework (skeleton wall), or on using massive coursing:

- Skeleton wall: this consists of wooden poles and beams which form a framework, which is then filled-in with stones.

This is also known in the Caribbean as "Spanish Walling" (for example in Jamaica). This type of wall, braced by diagonal timber pieces, is an indigenous type of stone nogging, reputedly

introduced by the Spaniards. The stones are keyed in to form a tight knit, and then mortared with sand and lime. This type of wall is more flexible than a massive wall and suitable for use in earthquake and hurricane prone areas. Skeleton frames in Haiti which are common between Miragoane and Fond des Negres in the South, use vertical uprights.

- Coursed type of wall: this is monolithic and more common in areas with high seasonal temperature difference.

Both types of wall can be of a dry-stone or built with mortar. Frequently used finishes of walls include coursed, random or snecked rubble.

The straight run of the wall is turned at a right angle by corner stones or quoins, to enclose space or to form a framework to be filled with stones. In stone rondavels, for instance at Maseru in Lesotho, the individual stones, whether slabs, ashlar, or boulders are gradually turned until a circle or oval shape is attained. To build the all stone pilot house as shown in Fig. 4 La Rioja, Argentina, slabs 2 - 10 cms thick and 30 cms wide, were cut in various length to provide building elements. With perfectly flat layers, at the top and bottom, semi-dry walling can be consid-

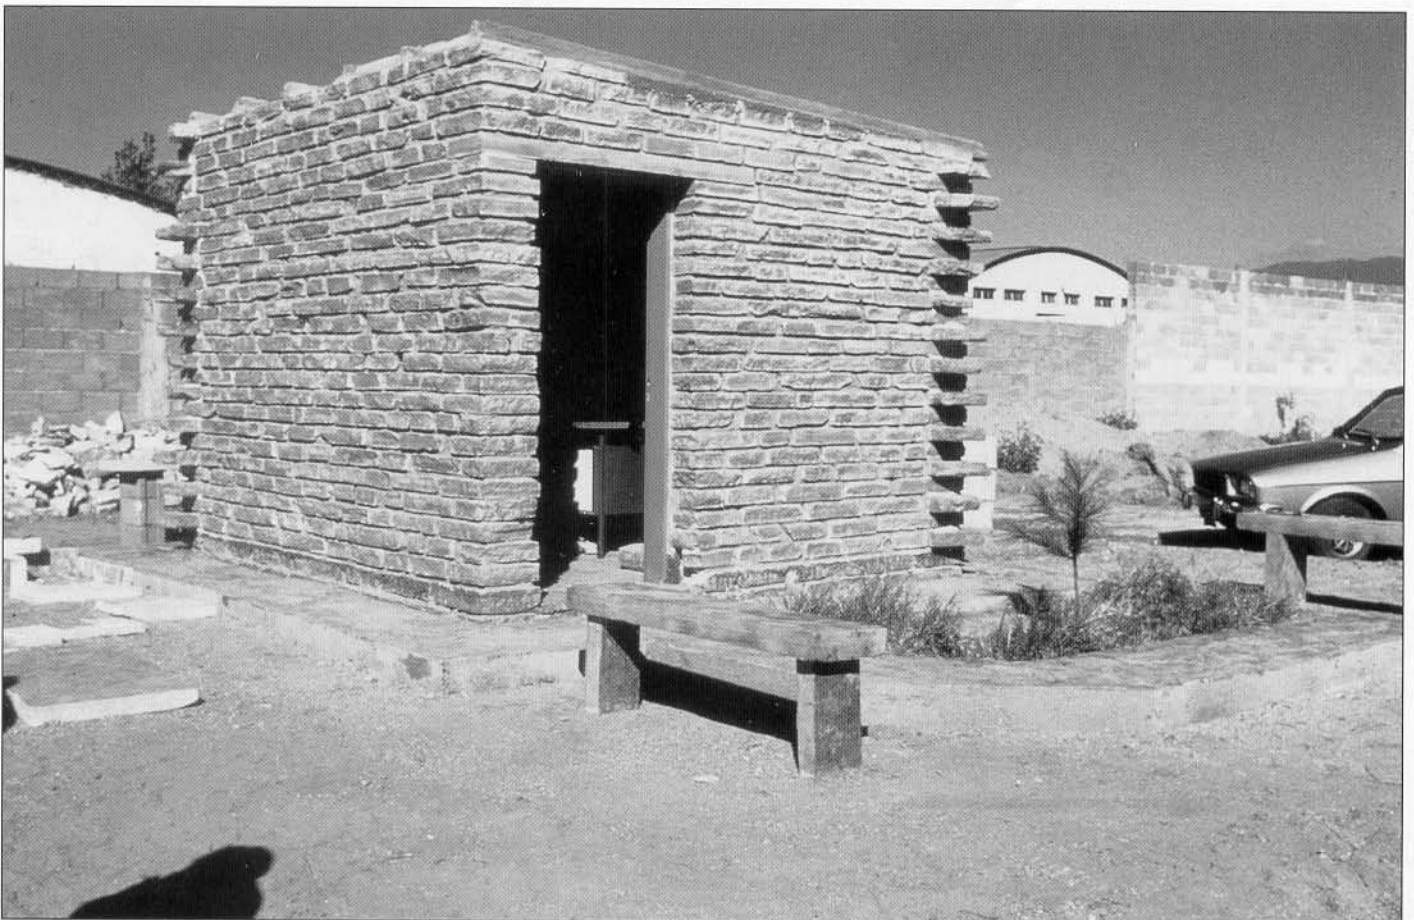


Figure 4: "La Rioja, Argentina"

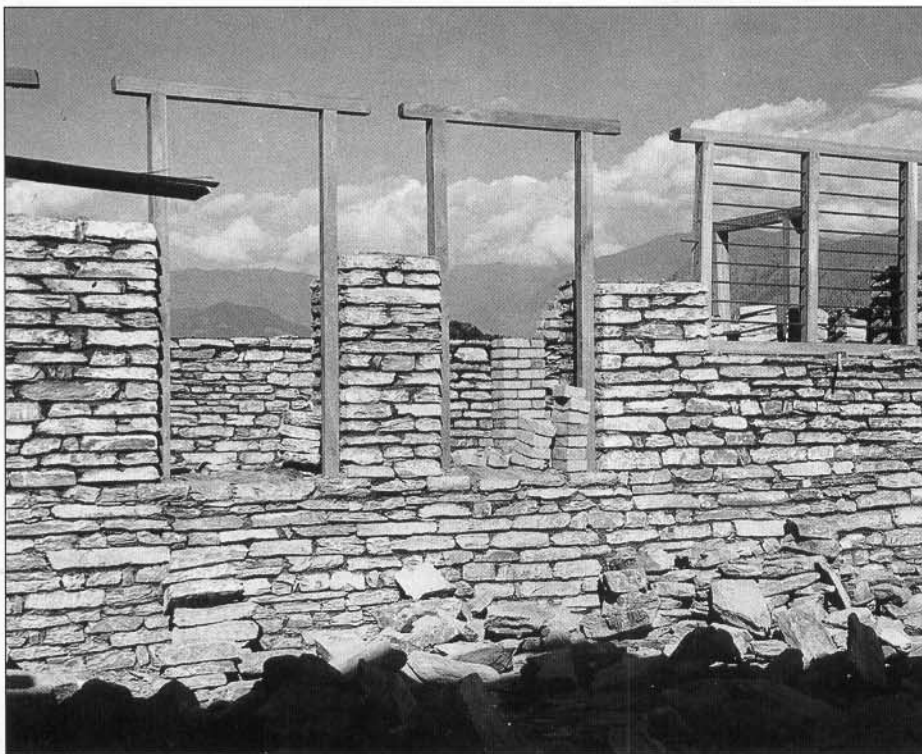


Figure 5: "Slabby stone walls and window openings in Nepal"

red. Grooved edges, for interlocking, can be cut by dove-tailing with a power tool, slicing the remaining core with the saw, carving the core by hand with a chisel and levelling the groove by fraising for smooth fitting.

#### Floors

Flooring slabs are laid in a geometrical pattern and smoothed by handgrinding using an abrasive brick at the end of a broomstick, and water.

#### Roofs

Rectangular slabs of 2.30 m length for roofing have a rebated joint to allow for expansion and are cut and grooved with a dry diamond disc power saw. Overlap of the roof provides added protection against sun or rain. For the kitchen working tops the smoothest slab is set aside to facilitate later polishing before fitting.

#### Note:

The term "stone walling", when used, is to emphasize a mortared wall version as opposite to dry-stone walls laid without mortar.

#### Glossary

- oolitic: sedimentary rock characterized by small spherical grains of calcium carbonate
- rift: cleavage, direction of easiest splitting
- cavity wall: two parallel single leaf walls, usually at least 50 mm apart

from each other, effectively tied together with wall ties.

#### Bibliography

- "Practical Stone Masonry" (P.R. Hill et al, 1995, Donhead Publishing, London, U.K.)
- "The Development Potential of Dimension Stone" (A. Shadmon, 1976, United Nations, New York - ST/EAS/34, U.S.A.)
- "Stone - an Introduction" (A. Shadmon, 1996, IT-Publications, London, U.K.)
- "Modern Practical Masonry" (E. Warland, 1953, Pitman Books, London, reprint by Stone Federation, London, U.K.)

#### Text by

Professor Asher Shadmon, Stone Technology International Consultants, P. O. Box 7344, Jerusalem 91970, Israel.

Published by **gate**

German Appropriate Technology Exchange  
Dag-Hammarskjöld-Weg 1 - 5  
Postfach 51 80  
D-65726 Eschborn  
Federal Republic of Germany  
Phone + 49 - 6169 - 79-3190  
Fax + 49 - 6196 - 79-7352  
(1997)

## What is BASIN?

Building materials and construction technologies that are appropriate for developing countries, particularly in the low-income sector, are being developed, applied and documented in many parts of the world. This is an important prerequisite for providing safe, decent and affordable buildings for an ever-growing population.

But such new developments can do little to improve the building situation, as long as the information does not reach potential builders. The types and sources of information on standard and innovative building technologies are numerous and very diverse, making access to them difficult.

Thus, in order to remedy this drawback, Shelter Forum, GATE, ITDG, SKAT and CRATerre are co-operating in the Building Advisory Service and Information Network, which covers five principal subject areas and co-ordinates the documentation, evaluation and dissemination of information.

All five groups have a co-ordinated database from which information is available on Documents, Technologies, Equipment, Institutions, Consultants as well as on Projects and Programmes. In addition, printed material or individual advice on certain special subjects is provided on request. Research projects, training programmes and other field work can be implemented in co-operation with local organizations, if a distinct need can be identified and the circumstances permit.

BASIN is a service available to all institutions and individuals concerned with housing, building and planning in developing countries, but can only function efficiently if there is a regular feedback. Therefore, any publications, information, personal experiences, etc. that can be made available to BASIN are always welcome and will help BASIN to help others.



Shelter Forum  
P.O.Box 39493  
22 Chiromo Access Road  
Off Riverside Drive  
Nairobi, Kenya  
Phone + 254 2 442108  
Fax + 254 2 445166



GATE - GTZ  
P.O.Box 5180  
D - 65 726 Eschborn  
Germany  
Phone + 49 6196 793190  
Fax + 49 6196 797352



ITDG  
Myson House  
Railway Terrace  
Rugby CV21 3HT,  
United Kingdom  
Phone + 44 1788 560631  
Fax + 44 1788 540270



SKAT  
Vadianstrasse 42  
CH - 9000 St. Gallen  
Switzerland  
Phone + 41 71 2285454  
Fax + 41 71 2285455



CRATerre - EAG  
Maison Levrat, Rue du Lac  
BP 53  
F - 38092 Villefontaine Cedex,  
France  
Phone + 33 474 95 43 91  
Fax + 33 474 95 64 21