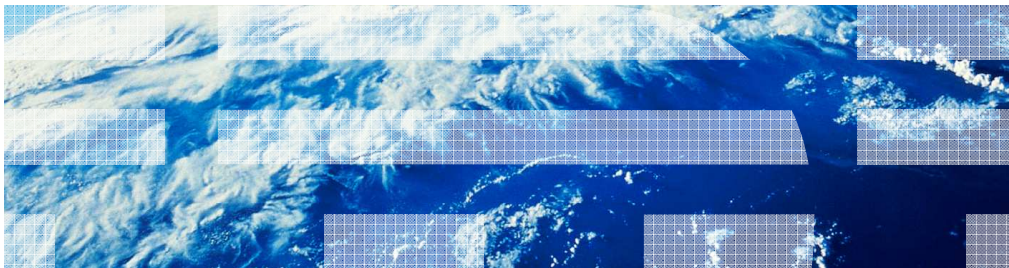

IBM WebSphere CloudBurst Appliance V2.0

Migration



This presentation describes how to upgrade the IBM WebSphere® CloudBurst™ Appliance from V1.0 to V2.0

Agenda

- Appliance migration
 - Upgrading firmware
 - Importing new virtual images
- Downgrading the appliance

Moving from V1.0 to V2.0 of WebSphere CloudBurst involves upgrading the appliance firmware and importing new virtual images into your appliance catalog. This presentation also describes how to downgrade your appliance if you want to move back to V1.0 from V2.0.

Appliance migration

- To migrate from V1.0 to V2.0, upgrade the appliance firmware
- Firmware upgrade is packaged as a .script2 file, available on **Fix Central**:
<http://www.ibm.com/support/fixcentral/>
- After upgrading the firmware, appliance data is preserved
- Recommendation: Before upgrading to V2.0, make an appliance backup
 - This backup is required if you want to move back to V1.0 later

To migrate your appliance from V1.0 to V2.0, you need to upgrade the appliance firmware. The new V2.0 firmware is packaged as a .script2 file and made available for download on **Fix Central**. When you upgrade your appliance, your appliance data – including your catalog content and customized patterns – is preserved. It is a good practice to take a backup of your appliance before performing the firmware upgrade. This backup is required if you want to move back to V1.0 later.

Upgrading the firmware

- Download the firmware file from **Fix Central**
- Open your WebSphere CloudBurst console
- Go to **Appliance > Settings**, expand the **Firmware** section
- Click in the box that says **Browse...** and point to the location of the firmware file you downloaded
- Click the **Upgrade** button and wait for the file to upload to the appliance and the upgrade to start



- After about 20 minutes, start a new console session and verify the new firmware level

Appliance firmware can be upgraded using the WebSphere CloudBurst administrative console. First, download the firmware file from **Fix Central** to your local workstation and open the console. Go to the **Appliance > Setting** section of the console and expand the **Firmware** section. The current firmware version of your appliance is displayed in this section. To upgrade, click inside the box that says **Browse...** and use the file dialog box to find the .scrypt2 firmware file on your system. Once you have selected the correct file, click the **Upgrade** button. This begins the process of uploading the firmware file to the appliance. While the upload is taking place, a status indicator is shown in the console letting you know how far along the upload is, in megabytes. After the firmware file upload has completed, the appliance kicks off the upgrade and restarts. When the appliance restarts, your browser session is no longer valid, so you do not see a status indicator there telling you that the appliance upgrade has finished. The process typically takes around 15-20 minutes, so after some time has passed, open a new console session and navigate back to the settings page. The firmware level displayed reflects the new level that was installed during the upgrade.

Virtual images

- After the firmware upgrade, existing virtual images are still in your appliance catalog
- New virtual images are available for download from Passport Advantage®
 - Updated WebSphere Application Server Hypervisor Edition fix pack levels for all hypervisor platforms
 - VMware ESX, PowerVM™, z/VM®
 - Download new images and import them into the appliance catalog

In addition to a new level of firmware for the WebSphere CloudBurst Appliance, new virtual images are available with the V2.0 release. These images are published on Passport Advantage. Images for all platforms (VMware ESX, PowerVM and z/VM) have been updated to new application server fix pack levels. To use these new images, download them and import them into the appliance catalog.

Downgrading the appliance

- To downgrade the appliance from V2.0 to V1.0:
 - Apply the V1.0 firmware
 - Restore your appliance from a backup archive that was taken on that firmware level
- Both the firmware installation and the restore are required to downgrade the appliance
 - Backup archive must be same firmware level you apply
 - It is good practice to take an appliance backup before performing any upgrades

Moving your appliance back to V1.0 from V2.0 is a two-step process. First, you need to install the level of V1.0 firmware that you want. Second, restore the appliance from a backup that was taken at the corresponding V1.0 firmware level. Both of these steps are required. An appliance restore operation only works when the backup archive was captured at the same firmware level that is on the appliance. That is why it is a good practice to take an appliance backup before performing any upgrades.

Section

Summary

This section provides a summary of this presentation.

Summary

- To migrate from V1.0 to V2.0, upgrade the appliance firmware and import new virtual images to the catalog
- To downgrade from V2.0 to V1.0, apply V1.0 firmware and restore from a V1.0 backup

To migrate from V1.0 to V2.0 of WebSphere CloudBurst, upgrade the appliance firmware and import new virtual images into the catalog. To move the appliance back to V1.0, apply the V1.0 firmware and restore from a V1.0 backup.



Feedback

Your feedback is valuable

You can help improve the quality of IBM Education Assistant content to better meet your needs by providing feedback.

- Did you find this module useful?
- Did it help you solve a problem or answer a question?
- Do you have suggestions for improvements?

Click to send email feedback:

mailto:iea@us.ibm.com?subject=Feedback_about_CB11_Migration.ppt

This module is also available in PDF format at: [./CB11_Migration.pdf](#)

You can help improve the quality of IBM Education Assistant content by providing feedback.



Trademarks, disclaimer, and copyright information

IBM, the IBM logo, ibm.com, Blu e Business, Business Partner Agent, eGov, eWork, eWorld, WebSphere, and trademarks registered trademarks of International Business Machines Corporation, registered in many jurisdictions. Other product and service trademarks are trademarks of IBM or other companies. All rights reserved. IBM trademarks are displayed on this website at <http://www.ibm.com/legal/copytrade.shtml>

THE INFORMATION CONTAINED IN THIS PRESENTATION IS PROVIDED FOR INFORMATIONAL PURPOSES ONLY. WHILE EFFORTS WERE MADE TO VERIFY THE COMPLETENESS AND ACCURACY OF THE INFORMATION CONTAINED IN THIS PRESENTATION, IT IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. IN ADDITION, THIS INFORMATION IS BASED ON IBM'S CURRENT PRODUCT PLANS AND STRATEGY, WHICH ARE SUBJECT TO CHANGE BY IBM WITHOUT NOTICE. IBM SHALL NOT BE RESPONSIBLE FOR ANY DAMAGES ARISING OUT OF THE USE OF, OR OTHERWISE RELATED TO, THIS PRESENTATION OR ANY OTHER DOCUMENTATION. NOTHING CONTAINED IN THIS PRESENTATION IS INTENDED TO, NOR SHALL HAVE THE EFFECT OF, CREATING ANY WARRANTIES OR REPRESENTATIONS FROM IBM (OR ITS SUPPLIERS OR LICENSORS), OR ALTERING THE TERMS AND CONDITIONS OF ANY AGREEMENT OR LICENSE GOVERNING THE USE OF IBM PRODUCTS OR SOFTWARE.

© Copyright International Business Machines Corporation 2010. All rights reserved.