

IBM SecureWay Communications Server for AIX, Version 5

Highlights

Provides a reliable, highperformance gateway server for SNA and TCP/IP clients, with improved network reliability and performance using HPR

Provides flexible access to TCP/IP, network computing or SNA applications

Provides an integrated TN3270E server, with load balancing and SSL security including both encryption and client authentication


Provides Web-based 3270 SNA application access and system administration

Supports direct S/390 channel and ESCON attachment with multipath channel support

Step up to enterprise networking

Do you have a variety of equipment and protocols—new e-business, Web-to-host and client/server technologies, Systems Network Architecture (SNA) and TCP/IP networks, Web users and IBM 3270 and 5250 terminals —all connected to mainframe servers and midrange systems? If you do, then you understand the need to combine your SNA and TCP/IP networks. You also understand that it's a challenge to connect them so that they look and feel like one efficient, seamless network. IBM® SecureWay® Communications Server for AIX®, Version 5 (Communications Server) gives you the solution to meet your challenge.

Communications Server offers a total enterprise networking solution, SNA-to-TCP/IP connectivity and much more. Communications Server brings the reliability, performance, scalability and efficiency of SNA to your enterprise network.

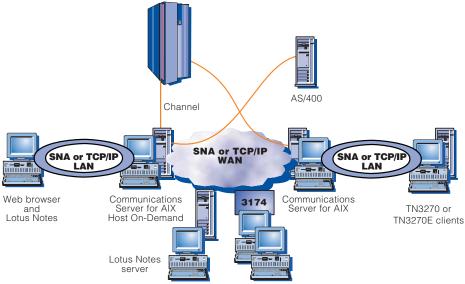

With your existing SNA network and the sockets-over SNA capability of Communications Server for AIX, you can access other sockets applications, such as Lotus Notes— or even connect to the Web.



A scalable, secure solution for small-to-large enterprise networks

Communications Server runs on the IBM AIX platform and extends the communication capability of the AIX operating system by acting as an enterprise server for SNA and TCP/IP networks.

Communications Server was designed with AIX and IBM RS/6000® in mind. By taking advantage of system facilities, this design enables maximum performance and data throughput. From a network of just a few nodes to a network of tens of thousands of nodes, Communications Server integrates applications and protocols seamlessly.

Protocol independence

With the explosion of TCP/IP networks and UNIX® systems, integrating a diverse environment of mainframe servers, midrange computers and workstations across SNA and TCP/IP networks can be a formidable task. However, now you can use IBM SecureWay Communications Server for AIX to share data or applications across multiprotocol networks.

Communications Server offers several solutions for your diverse environment. IBM AnyNet® is based on multiprotocol transport network (MPTN) technology, an open industry-standard architecture. MPTN is designed to allow any application to run over any network protocol. This means you can add applications designed to run over different protocols without modifying applications or changing hardware.

For example, with AnyNet Sockets over SNA, you can run sockets applications over existing SNA networks without adding a separate TCP/IP network. Such applications include File Transfer Protocol (FTP), Telnet, Simple Network Management Protocol (SNMP), Lotus Notes[®], SAP R/3 and Web browsers.

With AnyNet APPC over TCP/IP, you can also extend advanced program-toprogram communication (APPC) or Common Programming Interface for Communications (CPI-C) applications to TCP/IP users, without adding a separate SNA network. This allows AIX APPC or CPI-C applications, such as transaction server or IBM DB2[®] Database Server, to communicate with centralized computers and workstations across a TCP/IP network—without changing the applications.

Communications Server acts as a multiprotocol gateway, allowing similar applications to communicate over unlike networks. Users in remote branch offices can communicate over an existing central network. Paired gateways allow you to connect two TCP/IP LANs across an SNA network or two SNA LANs across a TCP/IP network.

TN3270E solution

IBM SecureWay Communications Server for AIX, Version 5 addresses the explosive growth in TN3270 by providing an integrated TN3270E server. This function provides access to SNA networks for a wide range of TCP/IP clients. Communications Server provides SNA network access to client applications running anywhere in your TCP/IP network. The TN3270E server supports any TN3270and TN3270E-compliant client and enables users to print from 3270 applications to locally attached printers or network printers residing anywhere in the TCP/IP network. It also supports Secure Sockets Layer (SSL) encryption and client authentication, providing highly secure TN3270 connections.

Internet solutions

As part of IBM's industry-leading network computing strategy, Communications Server supports IBM SecureWay Host On-Demand. This 100% Pure Java[™] solution gives you fast and easy intranet or Internet access to 3270-based information. Using industry-standard Telnet 3270 protocols, Host On-Demand provides easy access for intranet and Internet users needing access to host applications and data. No programming or additional hardware is required. Web Administration, a Communications Server tool, uses Java technology to provide a GUI to the configuration and administration of Communications Server. This enables the user to administer the server directly from a Web browser.

Enterprise-class functionality

Communications Server supports SNA connectivity in traditional hierarchical subarea networks and in peer-to-peer

environments. In subarea networks, you can use Communications Server to enhance connectivity and simplify configuration. In a peer-to-peer environment, Communications Server manages connectivity using the Advanced Peer-to-Peer Networking[®] (APPN[®]) protocol. The full-function network node enables a highly robust, low-maintenance networking backbone that offers a number of benefits, including improved bandwidth

plate large	Disertor game	CS/AIX nade snall0		
Þ .				82
investing all or				1
F @	1971	-		
- DIN				
-	12 (2003 Anna 14 Latorez Anna 14 Latorez Anna	e ibitite aller	A 8.87.127.80 per-4 00231 A 9.67.127.35 per-4 00231	
	Th Server -		C THE LEVEL IN LANCE SHOLE	
	The second se			
	A lanar start anus priorson Citerit abbress Part B	appling 121 Billion		
		figure (
	Carlault reserved 2004 LL	and the second second	IN Server assess	
	p	and the state of t	- Infanth cannot	
	Restaurt bese many of stars			
	Elipia, Li Provie-		- '0/0' ald-ma	
			- Will one a star	
			# laser+ INCTIS	
	-		1 HER per ad Like	
independent, Social S	*		artife part loader	P
- E ham	Partner Li Role	Laurent derformet	Bastay il anagat Stayant	
	HERLEN, KORCHAN DERVER & SA HERLEN, KORCHAN DERVER & SA		Note if sugar-	
	Application of person 1 of		· the second sector to	
tanta curtan			Berryton 1927: B.B.Scher Anne, Mr. 1	
-			a lest int i	
	NOVER LOCAL LU MORE BRIDE DRIVERU 2 Se			
	Swell Drowings 2 Se			
_				_

The easy-to-use Motif administration tool uses dynamic configuration of TN3270 access.

utilization, reliability, scalability, performance, and ease of configuration and administration. Bandwidth is maximized through dynamic logical unit (LU) session routing and more powerful application programming features.

Furthermore, APPN lowers your network administration and maintenance costs by using dynamic and simplified configuration. Because Communications Server supports dependent LU requester (DLUR), dependent LUs and 3270 applications can also benefit from APPN networking.

Network reliability and performance are also improved by the High-Performance Routing (HPR) ability to nondisruptively reroute traffic around network failures and congestion.

High performance

Communications Server exploits the parallel processing capabilities of symmetrical multiprocessing systems (SMP), improving performance up to three times over non-SMP systems.

Using the efficiency of APPN and HPR with the robust and powerful AIX platform, Communications Server consistently and reliably delivers peak performance from your network. With APPN, Communications Server can achieve effective data transfer rates up to 90 percent of the available bandwidth of a Token-Ring or Fiber Distributed Data Interface (FDDI) ring during file transfer.^{*}

Complete connectivity

Whether you want to connect networks over a WAN using SDLC, frame relay or X.25; over a LAN using Token-Ring, Ethernet, FDDI, asynchronous transfer mode (ATM) LAN emulation, directattached IBM S/390[®] channel or IBM ESCON[®] adapter, Communications Server is the solution for you.

You can use Communications Server to connect multiple physical units (PUs) across a single physical adapter for Token-Ring, Ethernet, X.25, Synchronous Data Link Control (SDLC), FDDI and channel. Support for multiple PUs extends the number of supported LUs per adapter port for all link types. This allows you to connect one or more centralized computers across the same adapter.

Multiple PU support can help you save money by reducing the number of adapters and costly links required in your network.

SNA gateway support

The SNA gateway function of Communications Server allows many SNA clients to access multiple S/390 and IBM AS/400[®] computers through one or more physical connections. It also allows clients to dynamically access a backup computer that shares the workload and improves availability of resources. SNA gateway allows you to preset and manage sessions, automatically logging off unattended workstations to free up access for other users.

The SNA gateway function of Communications Server supports the SNA protocols LU types 0, 1, 2, 3 and dependent LU 6.2 (APPC). The LUs defined in the gateway can be dedicated to a particular workstation or pooled among multiple workstations. Pooling allows workstations to share common LUs, increasing the efficiency of the LUs and reducing the configuration and start-up requirements at the central computer.

Easy-to-use Motif administration tool

Communications Server includes a GUI which can be used to configure, view and manage SNA resources. Extensive help screens provide guidance to perform specific tasks and also include overview and reference information. Dynamic updates to configuration can be made while the SNA node is active. Up-to-date status is displayed, and resources can be activated and deactivated through this same, easy-to-use interface.

Problem determination

When problems occur, you can find and fix them quickly using a range of diagnostic tools and resources. These vary from low overhead logs of critical events, such as link failures, to a detailed interpreted trace of the actual SNA flows.

Systems management

Support is provided for character mode configuration and management through the System Management Interface Tool (SMIT)—scripted control with an extensive command line and program access with a full-function node operator facility (NOF) application programming interface (API). These are further supplemented by support for configuration from the host through Tivoli[®] NetView[®] and the ICF/RCF services.

Power programming

Communications Server is not just a powerful, standalone network server it's a sophisticated programming interface that makes an excellent platform for programming and application integration. Communications Server provides a number of APIs, enabling you to easily develop applications across multiple platforms. APIs included are:

- LU Application Interface (LUA)-request unit interface (RUI), supporting dependent LU types 0, 1, 2, 3
- CPI-C and APPC APIs supporting both dependent and independent LU 6.2
- SNA management services
- Generic SNA interface
- NOF
- SecureWay Host Access Class Library (HACL) API

The Host Access API is a new Javabased API that provides the ability for you to develop your own 3270, 5250 or VT Java applications. The Host Access API for Java provides a core set of classes and methods, enabling the development of platform-independent applications that can access host information at the data stream level.

Communications Server also provides the APPC Application Suite, a set of applications that demonstrates the distributed processing capabilities of APPN networks, including AFTP, APING, AEXEC, ATELL, ACOPY and ANAME. Also included is an SNA interactive transaction program generator (SNAPI) that provides assistance in developing APPC and CPI-C transaction programs. You can use this tool to quickly develop programs that interact with existing programs on any remote system that supports LU 6.2, including AIX, IBM CICS®, IBM IMS™, IBM OS/400® and IBM Communications Servers on other platforms.

Applications supported

Some of the applications supported by Communications Server include:

- SNA Client Access for AIX
- 3270 Host Connection Program for AIX
- DB2/6000: DDCS/6000 and Client Support/6000, SNA Support Feature
- Transaction Server for AIX
- IBM TXSeries[™]
- IBM Connection Program/400 for UNIX Environment
- IBM ADSTAR® Distributed Storage Manager for AIX
- IBM CallPath[®] Server

• IBM DirectTalk® for AIX

For more information

For more information about SecureWay Software, visit: www.ibm.com/secureway

For more information about Communications Server, visit: www.ibm.com/software/network/ commserver

IBM SecureWay Communications Server for AIX features and benefits				
Feature	Benefit			
Multiprotocol gateway	 Allows sockets (TCP/IP) applications to run over SNA networks and allows APPC applications to run over TCP/IF Provides greater freedom and more choices in combining network protocols, while protecting investment in user applications 			
TN3270E server	 Allows TCP/IP users easy access to IBM 3270 applications and print services through TN3270E server, and supports Host On-Demand Web-based 3270 emulator Includes SSL encryption and client authentication support 			
Advanced Peer-to-Peer Networking (APPN)	 Brings APPN network-node and end-node support with the benefits of peer networking—including simplified configuration, better availability, dynamic routing and easier maintenance Offers a way for existing APPC and CPI-C applications to take advantage of peer networks Allows 3270 applications to flow over APPN networks with DLUR enablement Provides network node for intermediate routing services 			
High-Performance Routing (HPR)	 Increases data routing performance and reliability Offers nondisruptive routing around network outages 			
SNA gateway support	 Allows many SNA clients to access multiple S/390 and AS/400 computers through one or more physical connections Brings large computer resources to many users while keeping adapter and line costs down Allows you to preset and manage sessions, automatically logging off unattended workstations to provide access for other users Allows the LUs defined in the gateway to be dedicated to a particular workstation or pooled among multiple workstations 			
Application programming support	 Provides an excellent platform for programming and application integration Includes Host Access Class Library (HACL) API for Java, providing a core set of Java classes and methods to allow the development of platform-independent applications that can access host information at the data stream level Provides LUA-RUI API, supporting dependent LU types 0, 1, 2, 3 Provides CPI-C and APPC APIs supporting both dependent and independent LU 6.2 that can make it easier to develop cross-platform applications Provides NOF API, which allows custom applications to be written to perform system administration tasks Provides SNA Management Services API, which enables an AIX system to function as a Management Services entry point Includes an APPC Application Suite, a set of applications that demonstrates the distributed processing capabilities of APPN networks, including AFTP, APING, AEXEC, ATELL, ACOPY and ANAME Provides a SNAPI to help you develop APPC and CPI-C transaction programs that can help you to quickly develop programs which interact with existing programs on any remote system supporting LU 6.2 			
Advanced program-to- program communication (APPC)	 Delivers distributed processing capabilities by enabling different network nodes to share resources and tasks Accommodates peer-to-peer interaction and communication among various IBM and non-IBM systems Supports multiple LUs and multiple concurrent links Includes persistent verification to improve security 			
Common Programming Interface for Communications (CPI-C)	• Permits smooth movement of applications from one system platform to another (for example, from an AIX			
 Configuration, installation Includes easy-to-use, quick-installation option Provides smooth migration from previous versions of Communications Server for AIX, SNA Server for AIX Server/6000 and AIX SNA Services/6000 Introduces new, easy-to-use Motif GUI, which significantly increases the productivity of system administration. Provides Web Administration, a browser-based administration tool 				
Problem determination and systems management	 Offers quick access to integrated problem determination functions Allows problem determination and systems management functions to be performed under program control through the use of the NOF API Facilitates management of remote servers so local operators need not be present 			

IBM SecureWay Communications Server for AIX at a glance

Hardware requirements	 RS/6000, IBM POWERserver® or Power PC, POWERstation computers, IBM 9076 SP2® Scalable POWERparallel Systems® or other AIX platform Appropriate communication adapters, cables and device drivers
Media	• CD-ROM, 8-mm tape, 4-mm tape, QIC525 1/4-inch tape, QIC120 1/4-inch tape
Software requirements	 AIX, Version 4.1.5 or later Motif level 1.2 support (part of AIX Base Operating System; required for Motif administration)
Memory requirements	• 32MB of RAM
Hard drive requirements	 32MB to 36MB of permanent space is required depending on features installed, plus 2MB of temporary space during installation 2.5MB to 4.0MB per language is required for messages, depending on language
	8MB is required for softcopy documentation
Application programming interfaces (APIs) supported	• Upward compatibility for applications written to utilize the APIs of AIX SNA Services/6000, Version 1.x; AIX SNA Server/6000 Version 2.x; AIX SNA Server for AIX, Version 3.x; Communications Server for AIX, Version 4.x
	 CPI-C and APPC supporting both dependent and independent LU 6.2 Common services
	Conventional LUA-RUI (supports LU 0, 1, 2, 3)
	Network management services
	• NOF
	• HACLAPI
Supported communication	ATM (LAN emulation)
services and protocols	• ESCON and block multiplexer channel, including MPC support
-	• Ethernet
	• FDDI
	• Frame relay (using an emulated Token-Ring interface with the TPS/SoftFRAD product)
	IBM Token-Ring Network
	• SDLC
	• X.25



© International Business Machines Corporation 1999

IBM Corporation Department VK4A 3039 Cornwallis Road Research Triangle Park, NC 27709

Produced in the United States of America 8-99 All Rights Reserved

Advanced Peer-to-Peer Networking, ADSTAR, AIX, AnyNet, APPN, AS/400, CallPath, CICS, DB2, DirectTalk, the e-business logo, ESCON, IBM, IMS, OS/400, POWERserver, RS/6000, S/390, Scalable POWERparallel Systems, SecureWay, SP2 and TXSeries are trademarks of International Business Machines Corporation in the United States, other countries or both.

Lotus Notes is a trademark of Lotus Development Corporation in the United States, other countries or both.

NetView and Tivoli are trademarks of Tivoli Systems Inc. in the United States, other countries or both.

Windows NT is a trademark of Microsoft Corporation in the United States, other countries or both.

Java and all Java-based trademarks and logos are trademarks of Sun Microsystems, Inc. in the United States, other countries or both.


UNIX is a registered trademark in the United States, other countries or both and is licensed exclusively through X/OPEN Company Limited.

Other company, product and service names may be trademarks or service marks of others.

*Actual customer results may vary.

٢

Printed in the United States on recycled paper containing 10% recovered post-consumer fiber.



G325-3572-05