

## IBM Beacon Installation Instructions

Version: June 9, 2005

IBM P/N 65P6388


The IBM Beacon is a Listed Accessory of the IBM 7054 Tablet.

### Introduction

This document describes the steps to install batteries in an IBM Beacon, and attach it to a suspended ceiling frame. The beacon includes the ceiling mounting bracket. No tools are required to install the batteries or mount the beacon to a suspended ceiling.

### Installation

1. Verify that the suspended ceiling frame is the correct type. The ceiling frame width should be  $15/16$  inches wide (or .94 inch or 23.8 mm). The ceiling tiles should not extend below the ceiling frame. The ceiling should be horizontal (not sloped). If the ceiling frame or ceiling tiles do not match this description and picture, do not install the beacon to the ceiling.

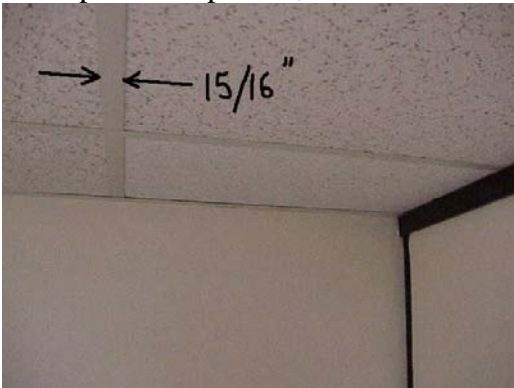

2. Open the beacon top cover by unscrewing the top cover, as shown in this picture. The top cover can be unscrewed by pressing on the mounting bracket. The top cover and mounting bracket are turned counter-clockwise, the same removing a lid from a jar.



3. Install the batteries. Three 1.5 volt "C" size alkaline batteries are needed for each beacon. The battery orientations are marked inside the beacon.

## IBM Beacon Installation Instructions

Version: June 9, 2005

IBM P/N 65P6388

4. Close the top cover until you hear and feel the cover click closed. When the cover is properly closed, the beacon will not open easily.

5. Raise the 2 ceiling tiles next to the ceiling frame where the beacon will be mounted, and clip the beacon onto the suspended ceiling frame as shown in the pictures below. Only 1 pair of hooks is shown in the picture. Both pairs of hooks must be clipped onto the ceiling frame at the same time.



6. Lower the 2 ceiling tiles to their original position.

7. This step is very important! Check that all 4 of the mounting bracket hooks are properly latched onto the ceiling frame, as shown in the picture below.

