

Upsampling (5B)

-
-


Copyright (c) 2009, 2010, 2011 Young W. Lim.

Permission is granted to copy, distribute and/or modify this document under the terms of the GNU Free Documentation License, Version 1.2 or any later version published by the Free Software Foundation; with no Invariant Sections, no Front-Cover Texts, and no Back-Cover Texts. A copy of the license is included in the section entitled "GNU Free Documentation License".


Please send corrections (or suggestions) to youngwlim@hotmail.com.

This document was produced by using OpenOffice and Octave.

Band-limited Signal

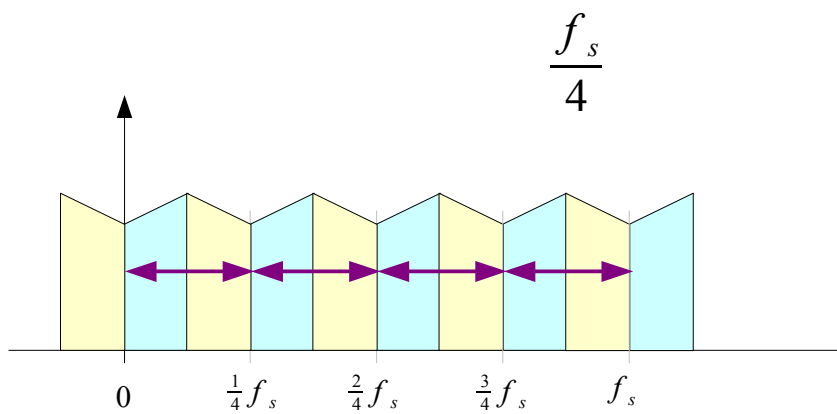

UP
→

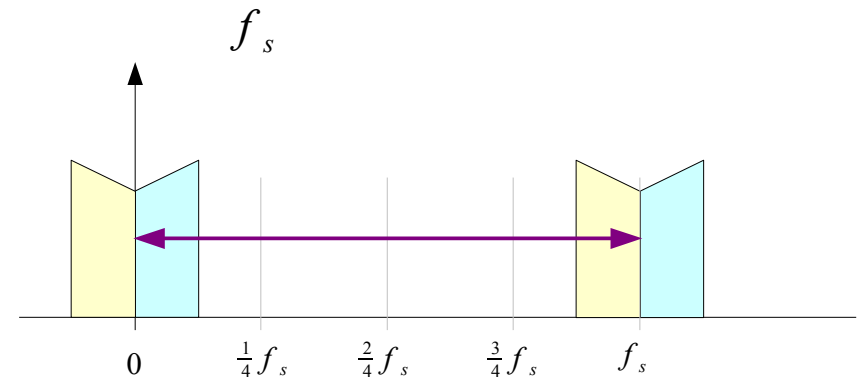



Sampling Frequency $\frac{1}{4} f_s$

Sampling Time $T = \frac{4}{f_s}$




←
→

Sampling Frequency $f'_s = f_s$

Sampling Time $T' = \frac{1}{f_s}$

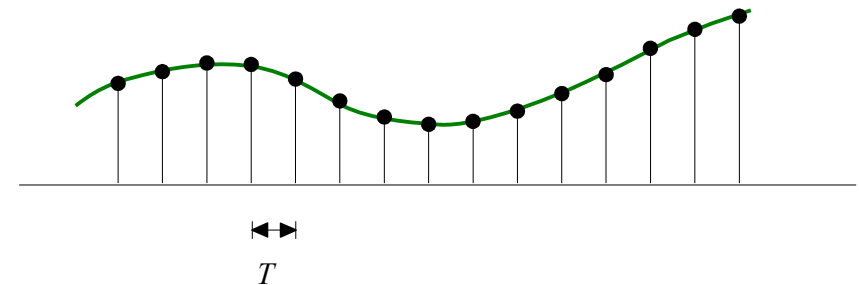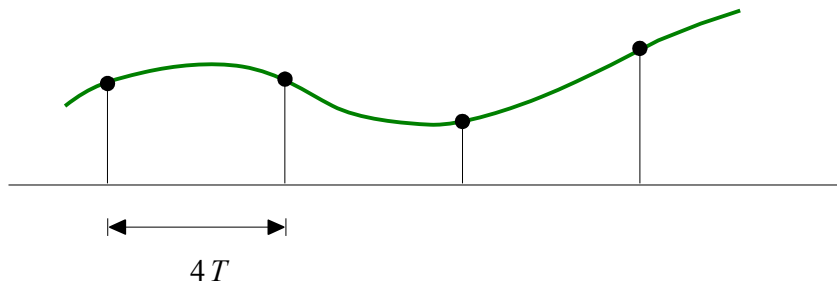


Time Sequence

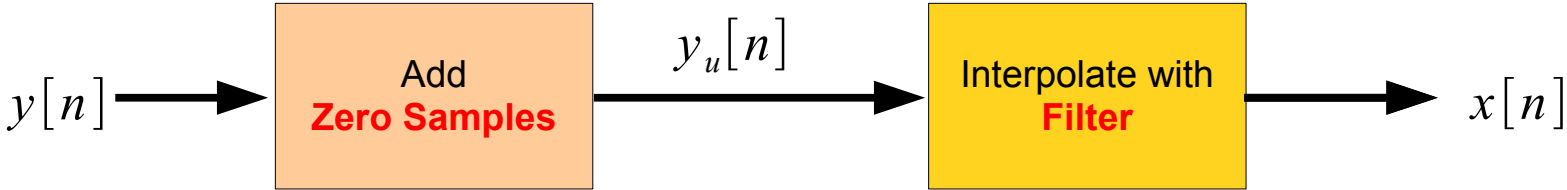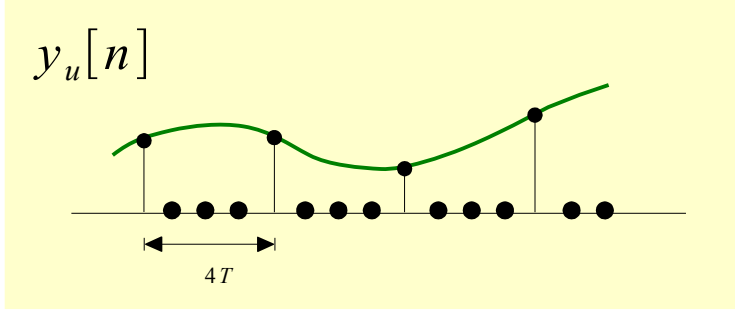
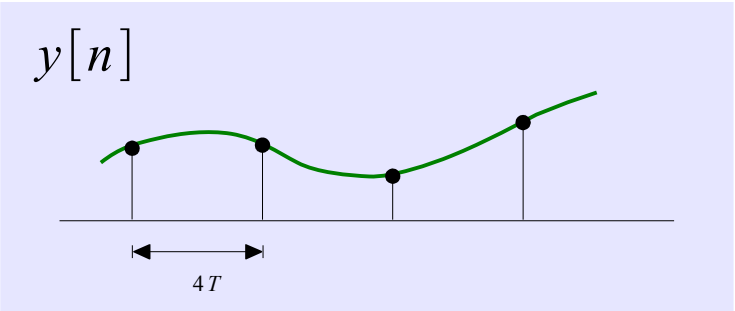


Ideal Sampling

T Sampling Period

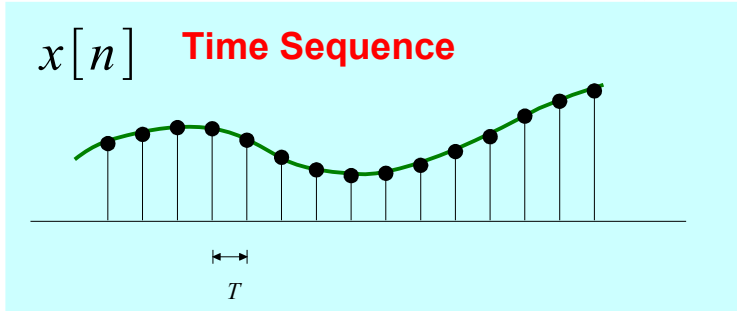

Time Sequence

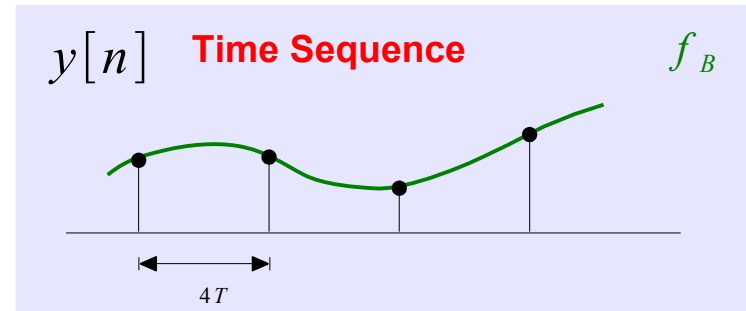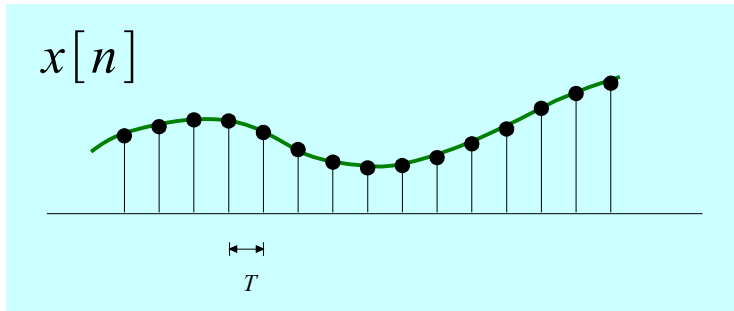

$$\hat{\omega} = \omega \cdot T_s = \frac{\omega}{1/T_s}$$

$$\hat{\omega} = \frac{\omega}{f_s} = 2\pi \frac{f}{f_s}$$




Normalized to f_s

Normalized Radian Frequency



The Same Time Sequence

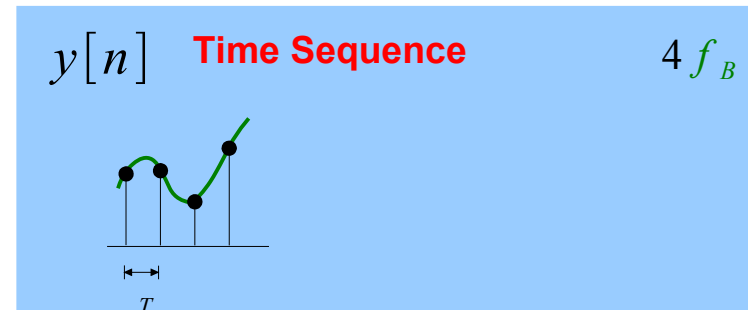



The Same Normalized Radian Frequency

Normalized by the Sampling Frequency





$$\frac{f_B}{1/4T} = f_B(4T)$$

$$\frac{4f_B}{1/T} = f_B(4T)$$



Time Sequence

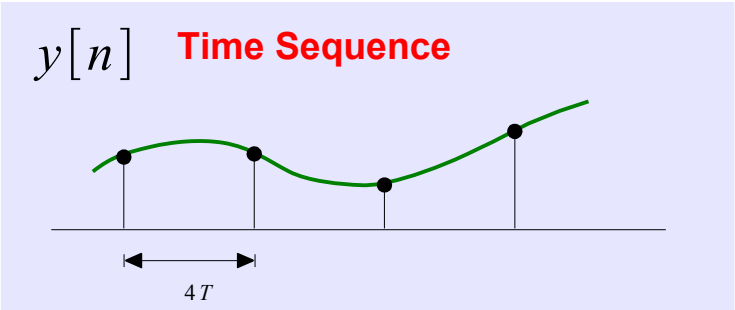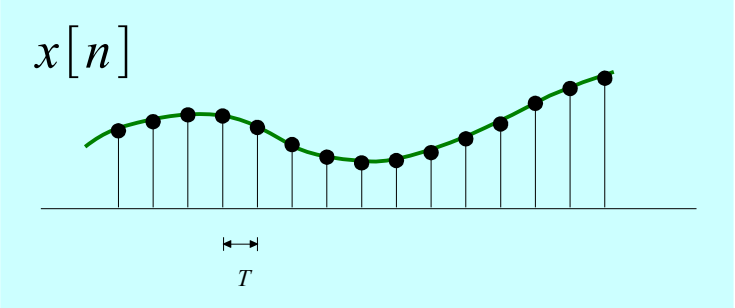





|| The Same Time Sequence

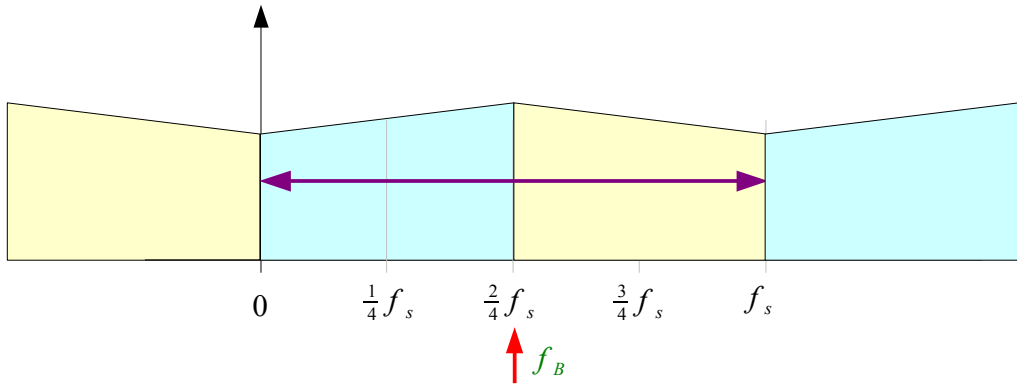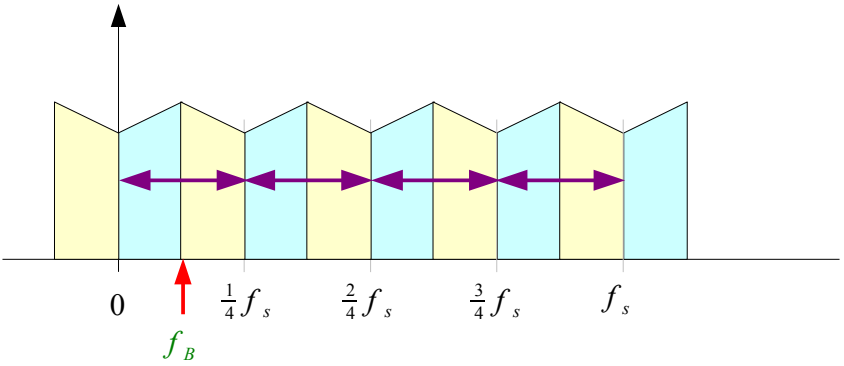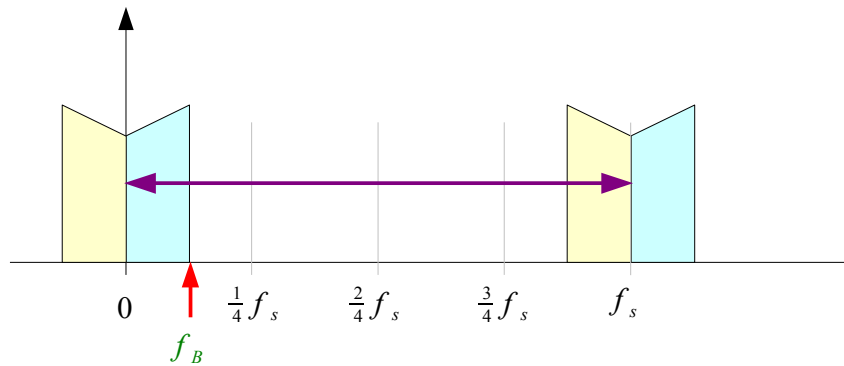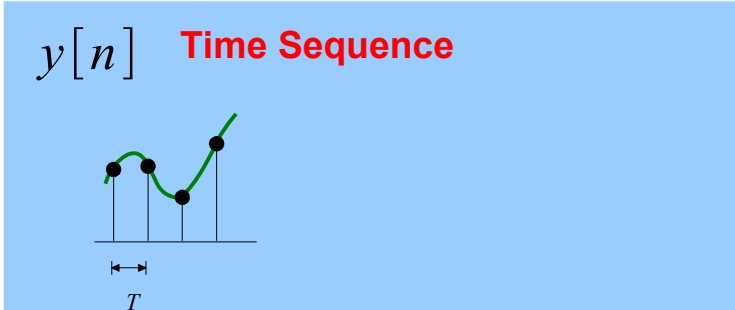


Time Sequence

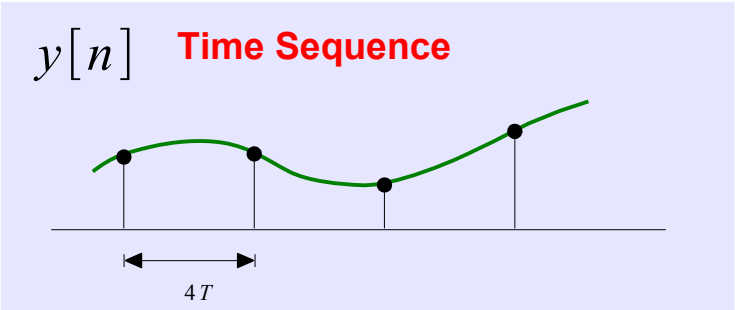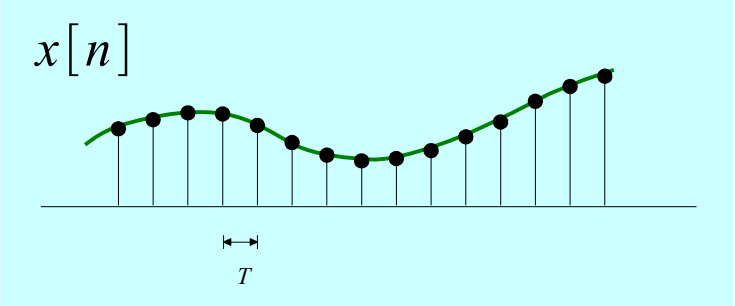


|| The Same Time Sequence

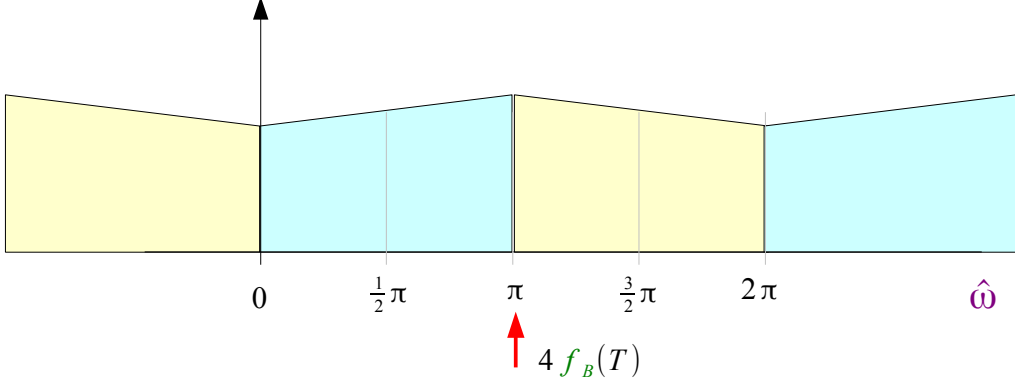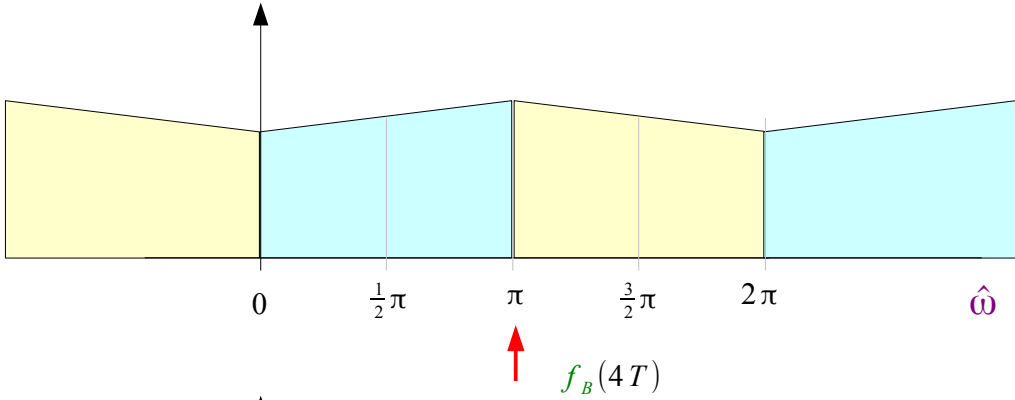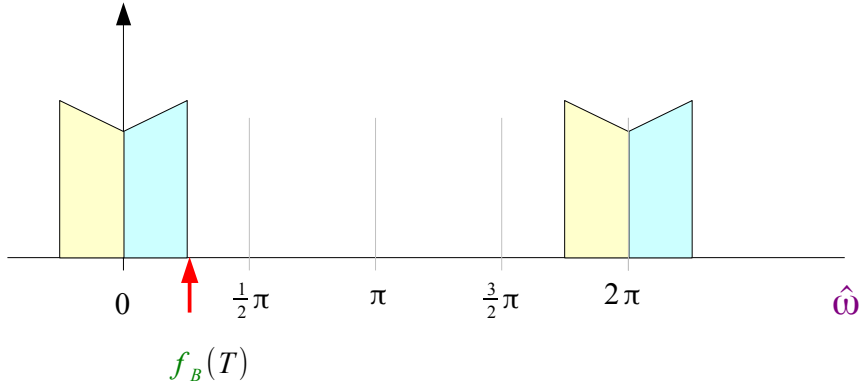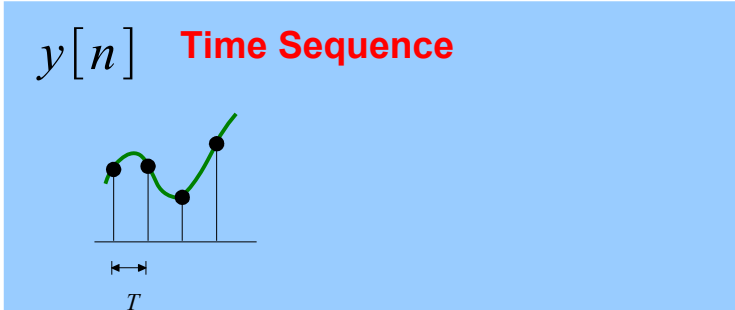



Measuring Rotation Rate

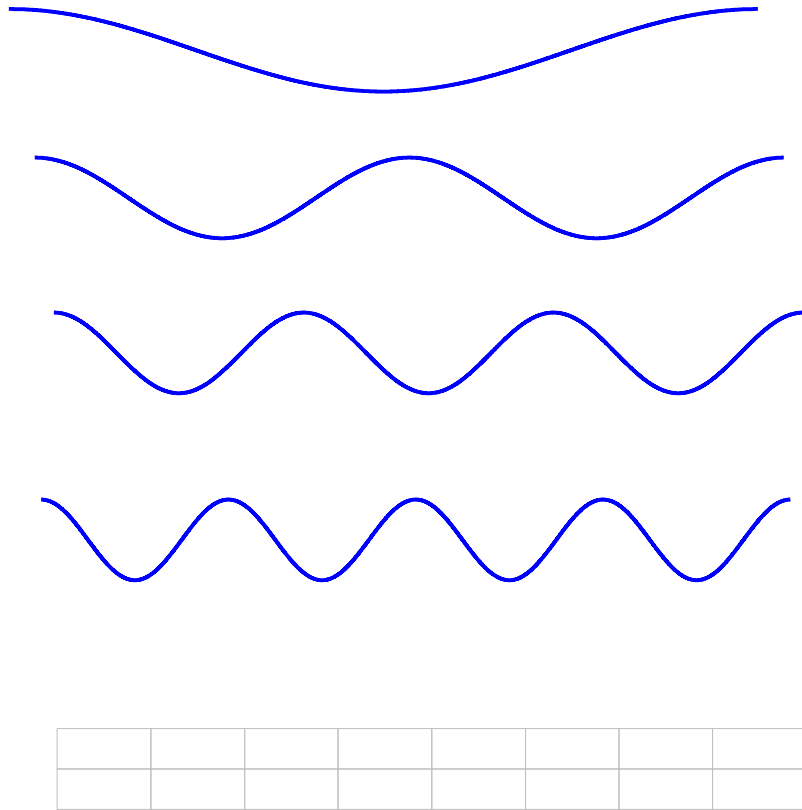


Signals with Harmonic Frequencies (1)

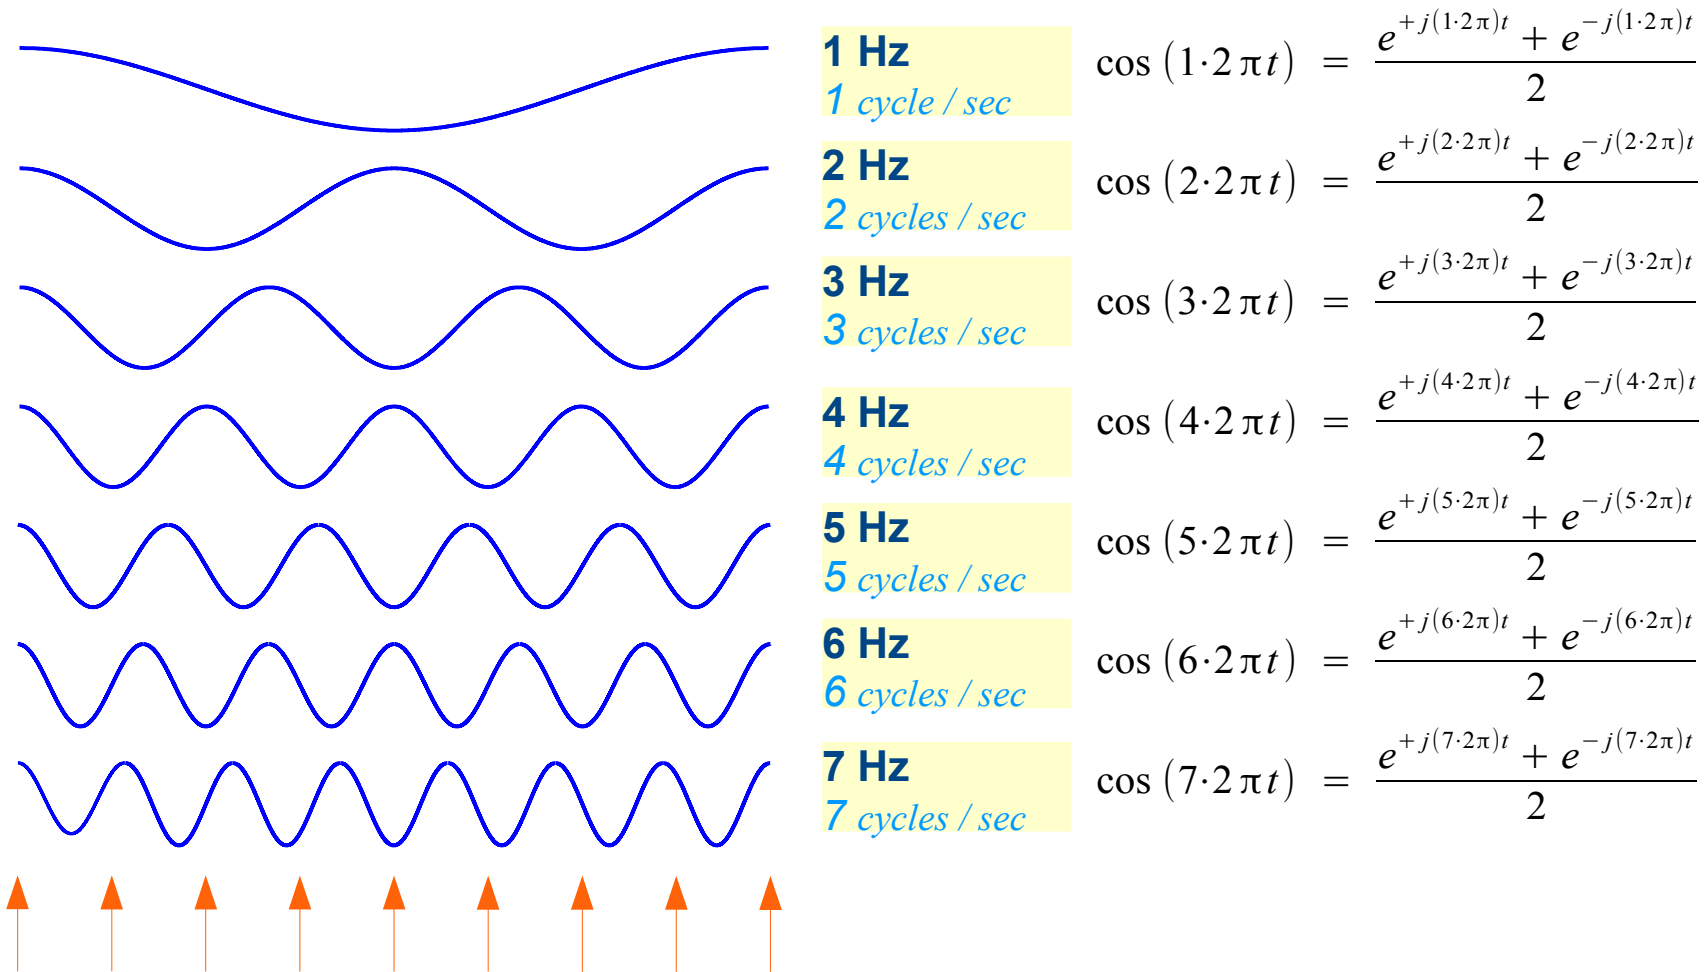


Signals with Harmonic Frequencies (2)

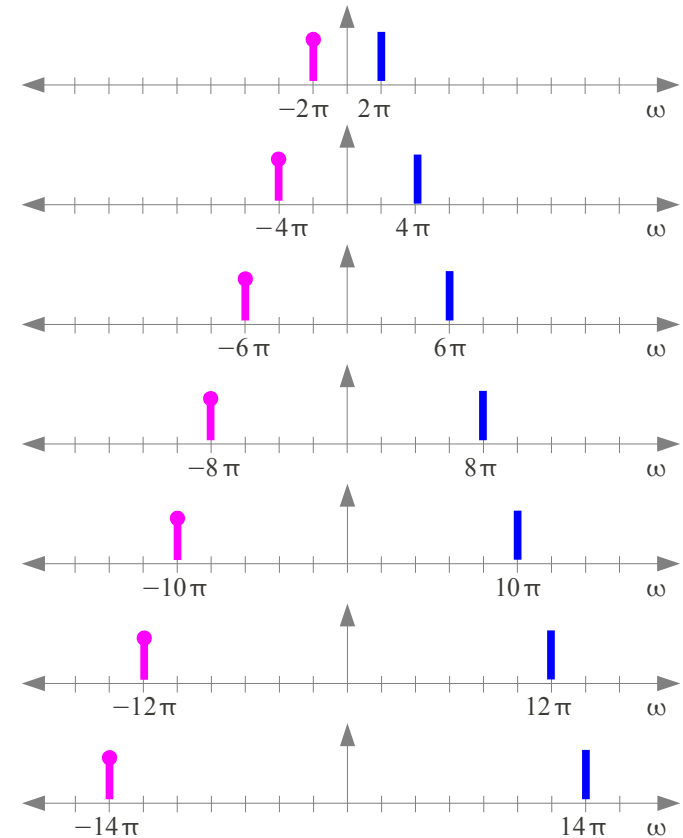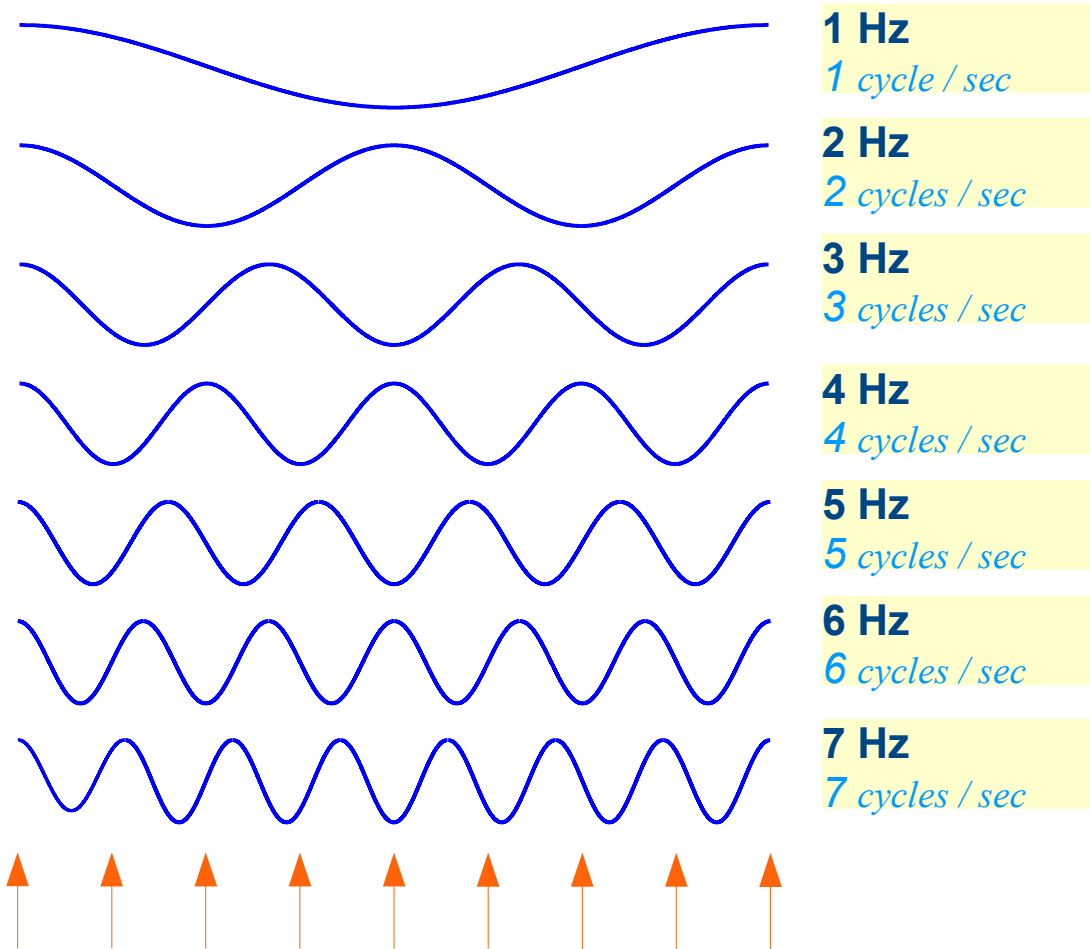


Sampling Frequency

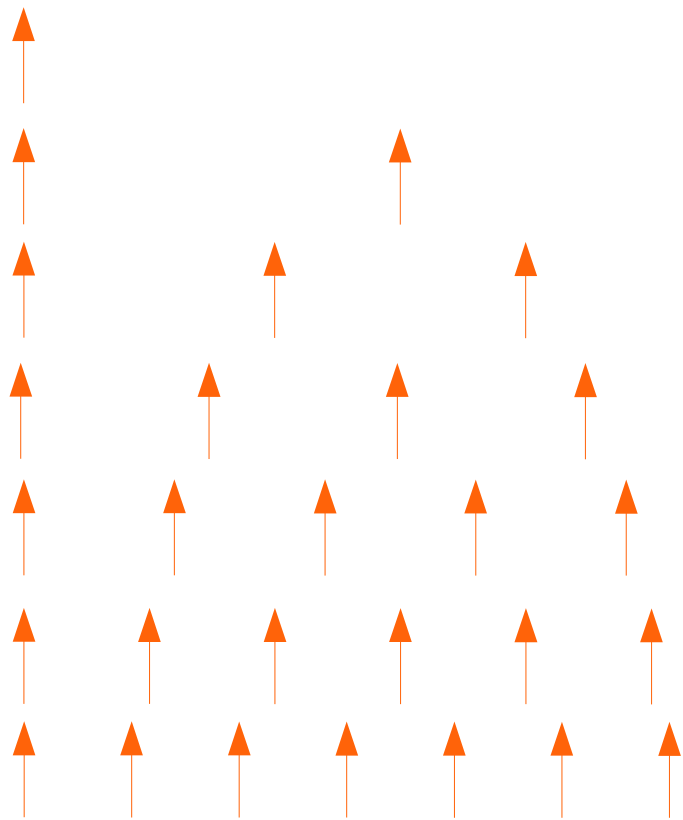


- 1 Hz
1 sample / sec
- 2 Hz
2 samples / sec
- 3 Hz
3 samples / sec
- 4 Hz
4 samples / sec
- 5 Hz
5 samples / sec
- 6 Hz
6 samples / sec
- 7 Hz
7 samples / sec

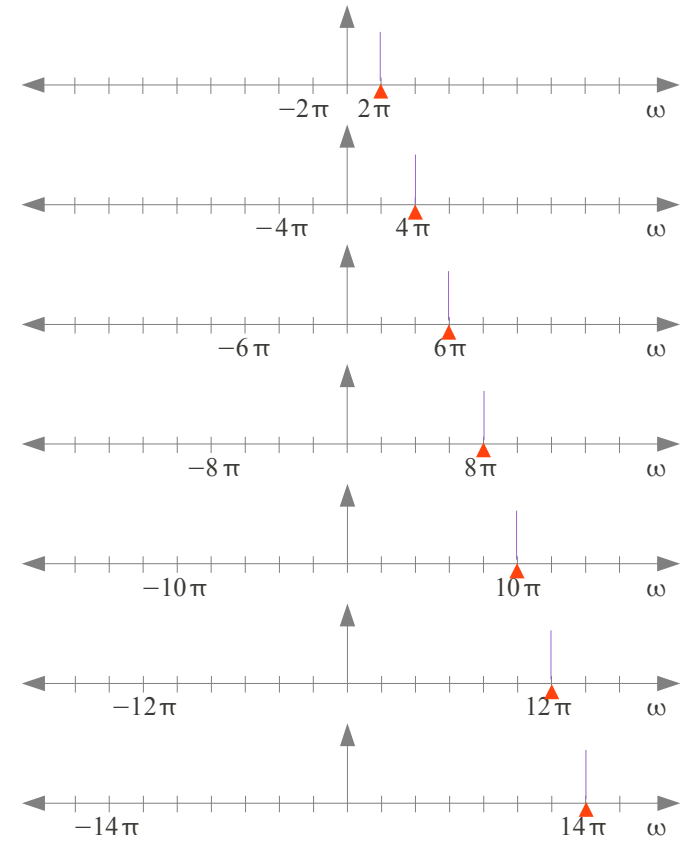

Nyquist Frequency

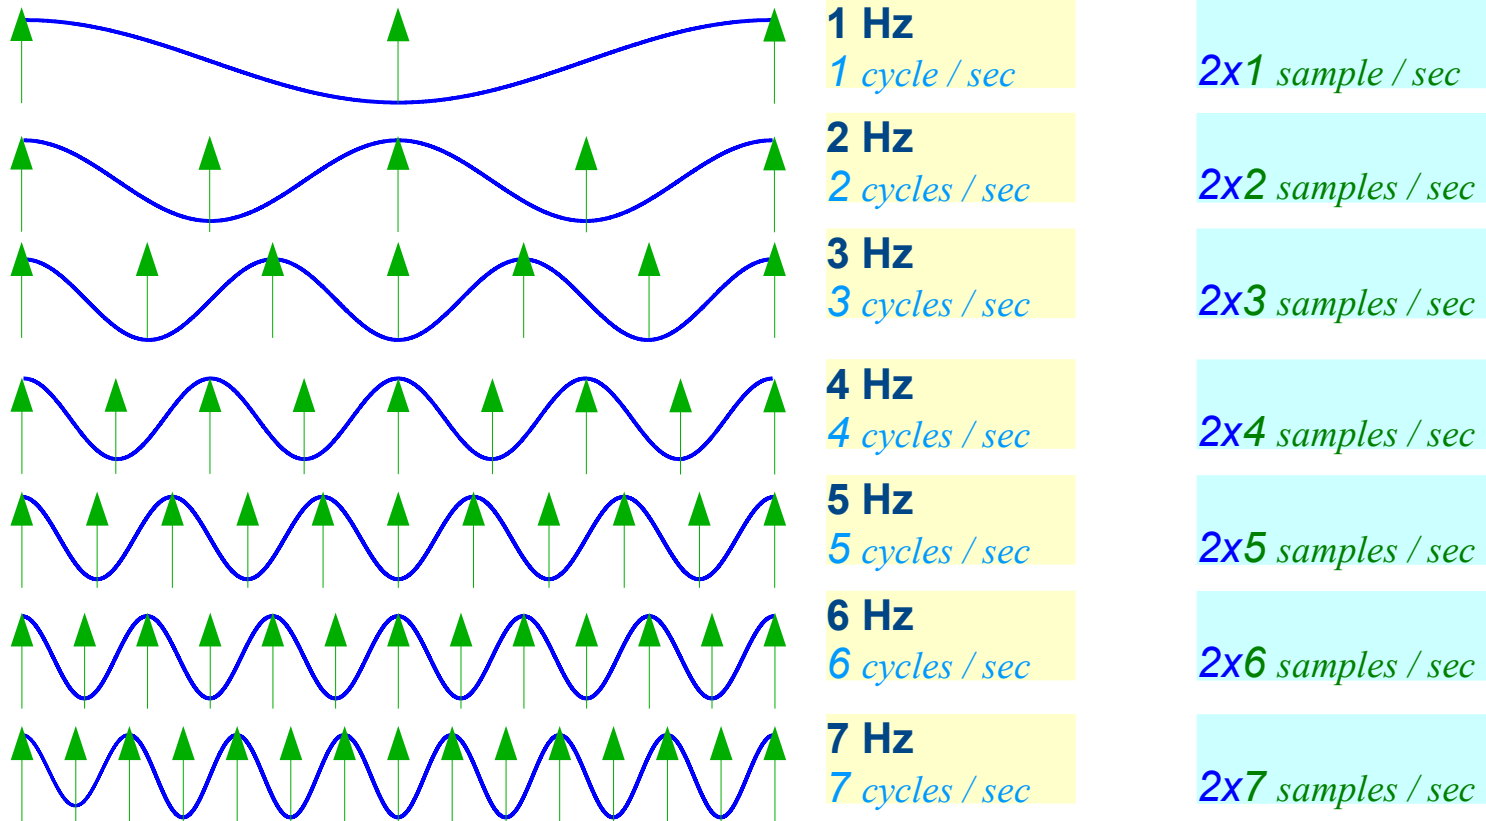

Aliasing

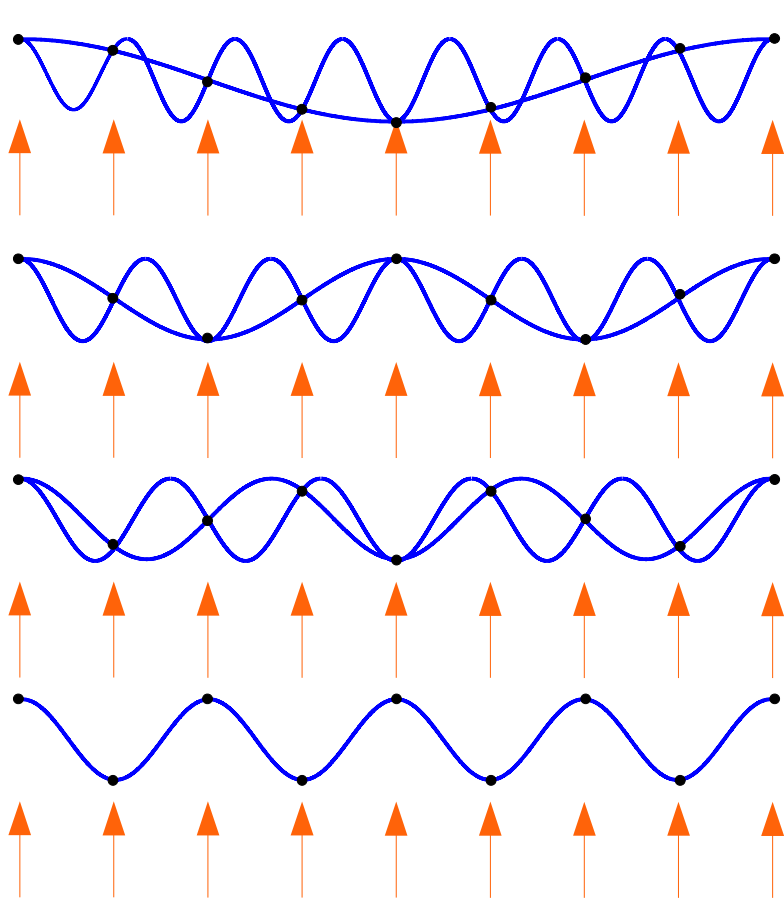

1 Hz
7 Hz

2x4 samples / sec

2 Hz
6 Hz


2x4 samples / sec

3 Hz
5 Hz

2x4 samples / sec


4 Hz

2x4 samples / sec

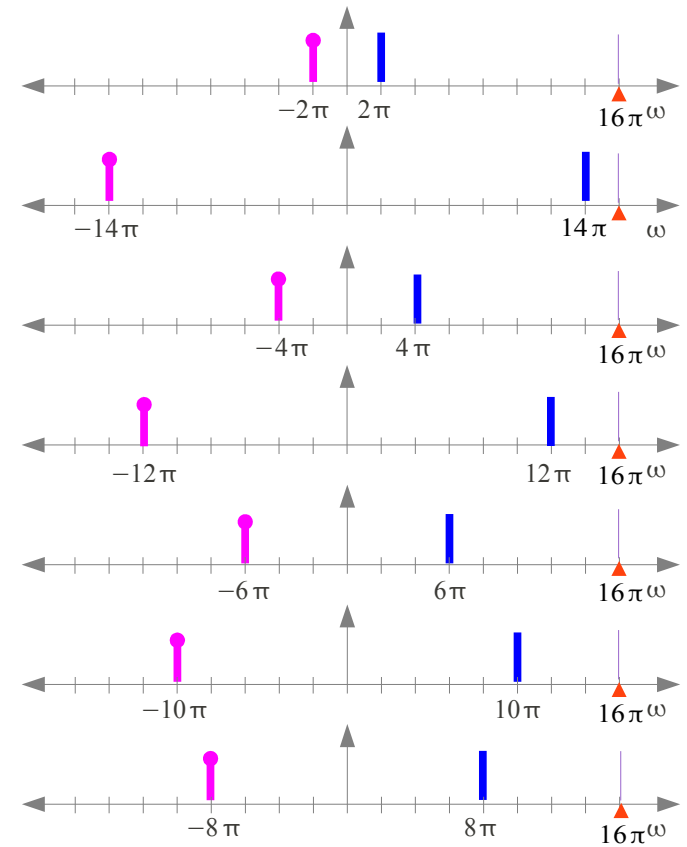

Sampling

$$\omega_s = 2\pi f_s \text{ (rad/sec)}$$

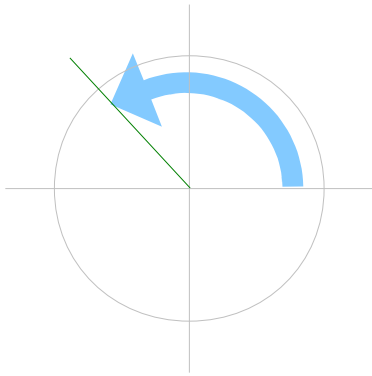

$$\omega_1 = 2\pi f_1$$

$$\omega_1 = \frac{\omega_s}{2} \text{ (rad/sec)}$$


$$f_1 = \frac{f_s}{2} \text{ (rad/sec)}$$

$$\omega_2 = 2\pi f_2$$


$$\omega_2 = -\frac{\omega_s}{2} \text{ (rad/sec)}$$

$$f_2 = -\frac{f_s}{2} \text{ (rad/sec)}$$


$$2\pi \text{ (rad)} / T_s \text{ (sec)}$$

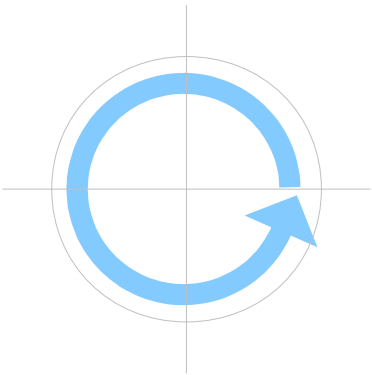

$$\pi \text{ (rad)} / T_s \text{ (sec)}$$

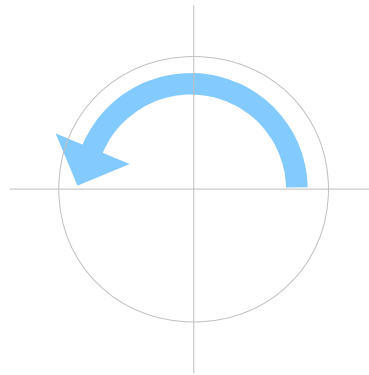


$$-\pi \text{ (rad)} / T_s \text{ (sec)}$$

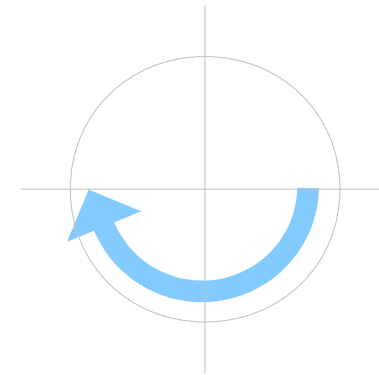


Sampling


$$\omega_1 = 2\pi f_1 \text{ (rad/sec)}$$

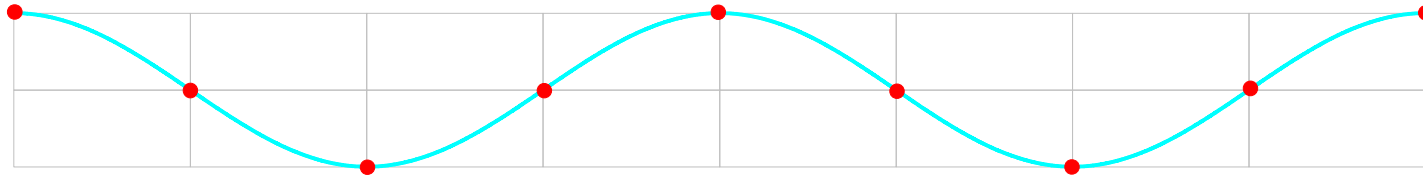


$$\omega_s = 2\pi f_s \text{ (rad/sec)}$$

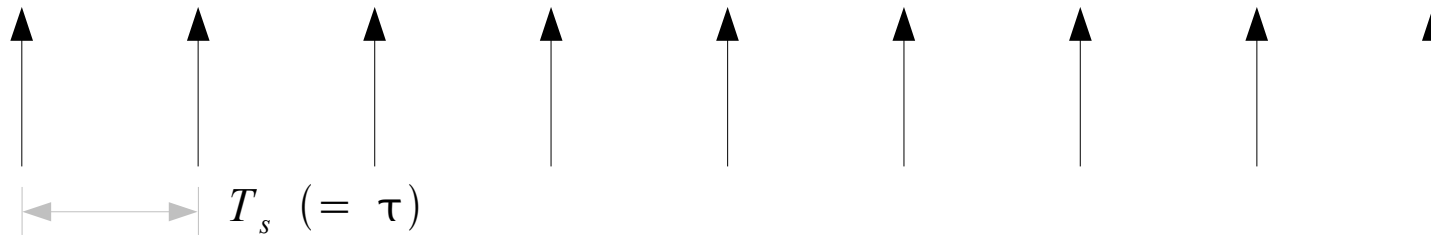

$$2\pi \text{ (rad)} / T_s \text{ (sec)}$$

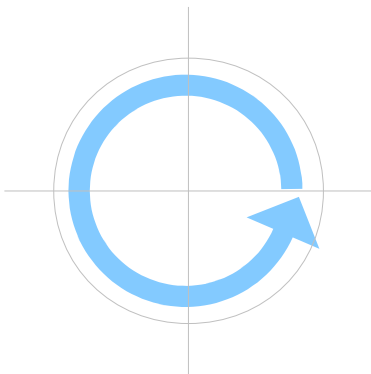

$$\frac{\pi}{2} \text{ (rad)} / T_s \text{ (sec)}$$

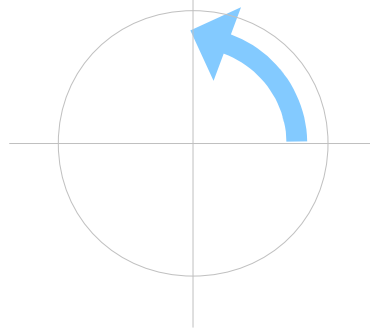

For the period of T_s
Angular displacement $\frac{\pi}{2}$ (rad)

$$\begin{aligned} \hat{\omega} &= \omega \cdot T_s \text{ (rad)} \\ &= 2\pi f_1 \cdot T_s \text{ (rad)} \\ &= 2\pi \frac{f_s}{4} \cdot T_s \text{ (rad)} \\ &= \frac{\pi}{2} \text{ (rad)} \end{aligned}$$

Angular Frequencies in Sampling

continuous-time signals


Signal Frequency

$$f_0 = \frac{1}{T_0}$$


Signal Angular Frequency

$$\omega_0 = 2\pi f_0 \text{ (rad/sec)}$$

For 1 second
 $2\pi f_0 \text{ (rad/sec)}$



For 1 revolution
 $2\pi \text{ (rad)}$
 $T_0 \text{ (sec)}$



sampling sequence


Sampling Frequency

$$f_s = \frac{1}{T_s}$$


Sampling Angular Frequency

$$\omega_s = 2\pi f_s \text{ (rad/sec)}$$

For 1 second
 $2\pi f_s \text{ (rad/sec)}$

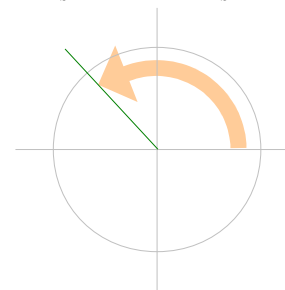

For 1 revolution
 $2\pi \text{ (rad)}$
 $T_s \text{ (sec)}$

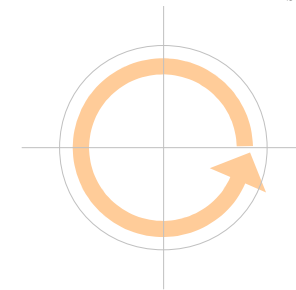

References

- [1] <http://en.wikipedia.org/>
- [2] J.H. McClellan, et al., Signal Processing First, Pearson Prentice Hall, 2003
- [3] A “graphical interpretation” of the DFT and FFT, by Steve Mann