



IBM Software Group

WebSphere Process Server V6.1 WebSphere Integration Developer V6.1 WebSphere Adapters

Installation and deployment




@business on demand.

© 2008 IBM Corporation
Converted to video June 23, 2015

This presentation covers the Installation and Deployment of all the WebSphere® Adapters V6.1.

Agenda

- Brief overview of prerequisite setup in EIS
- Adapter installation and deployment



The agenda includes the pre-requisite setup required for the adapters and adapter installation and deployment.

Section

Prerequisite set-up for the adapters

This section covers the pre-requisite setup for the adapters.

Prerequisite setup

- Following Adapters require specific setup in their EIS application
 - ▶ SAP – Configuration and IDOC status
 - ▶ PeopleSoft – Event table and event triggers in PeopleSoft
 - ▶ Siebel – Event table and event triggers in Siebel

The three application adapters, for SAP, PeopleSoft and Siebel, require some setup on the back end. All other adapters do not require any setup on the back end.

At a high level, the SAP adapter requires some basic configuration and configuration for IDOC status send by the adapter for inbound events. The PeopleSoft and Siebel adapters require the creation of the custom event project to store the events within their systems, and insertion of event triggers within their components.

Subsequent pages cover more detail on the setup, and the user guide of the adapter goes into more detail on the specifics of the configuration.

Prerequisite: SAP EIS set-up - ALE interface

- Check the configuration of your SAP system (for inbound and outbound)
 - ▶ Check that the logical systems are defined and assigned for the SAP system and external system (transaction code SALE)
 - ▶ Check that the distribution model has been maintained, and that the required message types have been added to the model (transaction code BD64)
 - ▶ Check that there are partner profiles for the logical system or distribution model (transaction code
- Configure SAP to update the IDoc status (for inbound only)
 - ▶ Set AleUpdateStatus configuration property to true
 - ▶ Set values for the AleSuccessCode and AleFailureCode properties
 - ▶ Configure the inbound parameters of the partner profile of the logical system to receive the ALEAUD message type. Set these properties :

SAP Property	Value
Basic Type	ALEAUD01
Logical Message Type	ALEAUD
Function Module	IDOC_INPUT_ALEAUD
Process Code	AUD1

5

Installation and deployment

© 2008 IBM Corporation

The setup in SAP EIS requires configuration for inbound and outbound events, and configuration to update IDOC status for inbound requests. This configuration requires that you are familiar with SAP systems.

Prerequisite: PeopleSoft EIS set-up

- Create Custom Event project in PeopleSoft, add the fields, records and the event generation script
 - ▶ Sample event project is provided with the adapter under `.\adapter\PeopleSoft\samples` folder
- Add the event generation script to the component operations (like create, update, et cetera)
 - ▶ This will allow generation of the events for the component when the operation is performed
- Generate PeopleSoft Component Interface Jar file

6

Installation and deployment

© 2008 IBM Corporation

The setup in PeopleSoft EIS involves setting up the Custom event project needed to store the events within PeopleSoft and consists of three primary tasks.

- 1) First, the Custom Event project must be created in PeopleSoft. This is where the generated events will be stored within PeopleSoft. The adapter looks at this event project for new events or for changing the status of existing events. A sample event project is provided in the samples directory. The schema of the custom event project must be the one provided in the User Guide. The name of the custom event project can be changed, but the schema must be the one expected by the adapter.
- 2) Next, the event generated triggers must be inserted in the components whose events can be monitored by the adapter. Sample triggers are provided by the Adapter.
- 3) Next, the PeopleSoft Component Interface JAR file must be created and is one of the dependencies used by the Adapter. You can have multiple PeopleSoft component APIs in a single Component Interface JAR file.

Creating the Event table and generating the component Interface JAR file in PeopleSoft requires familiarity with PeopleSoft tools.

Prerequisite: Siebel EIS setup

- Create an Event Siebel Business Component in Siebel EIS for the event store table
 - ▶ Schema and steps to create the Event Siebel Business Component are included in the User Documentation
- Add the event generation triggers to the Siebel business objects that need to be monitored
 - ▶ Creating, updating, or deleting records in the Siebel Business application is treated as an event
 - ▶ This will allow generation of the events for the component when the operation is performed
 - ▶ Siebel supports Visual Basic® scripts and Siebel eScript embedded in the Siebel business component event handlers to populate the event store table
- Sample event business component and Siebel scripts is provided with the adapter



Configuration of Siebel EIS consists of setting up the Custom event project needed to store the events within Siebel. The tasks are similar to the tasks explained in the previous page, and include two primary tasks.

- 1) First, the Custom Event project must be created in Siebel. This is where the generated events will be stored within Siebel. The adapter looks at this event project for new events or changing the status of existing events. Sample event project is provided in the samples directory. The schema of the custom event project must be the one provided in the User Guide. The name of the custom event project can be changed, but the schema must be the one expected by the adapter.
- 2) Next, the event generated triggers must be inserted in the components whose events can be monitored by the adapter. Siebel supports Visual Basic scripts of Siebel eScripts and sample triggers are provided by the Adapter.

Creating the Event table in Siebel requires familiarity with Siebel tools.

Section

Adapter installation and deployment

This section covers Adapter installation and deployment.

Adapter importing into Integration Developer

- All the WebSphere Adapters are included in Resource Adapters directory of WebSphere Integration Developer
 - ▶ Adapter RAR file names:
 - JDBC: CWYBC_JDBC.rar
 - Flat File: CWYFF_FlatFile.rar
 - FTP: CWYFTP_FTPFile.rar
 - Email: CWYEM_EMail.rar
 - SAP: CWYEP_SAPAdapter.rar
 - PeopleSoft: CWYES_PeopleSoftAdapter.rar
 - Siebel: CWYEB_SiebelAdapter.rar
 - JDE: CYWED_JDE.rar
 - External service wizard uses the default location to import the RAR files into WebSphere Integration Developer tool workspace
 - ▶ Importing a RAR file in creates a J2EE connector RAR project
- All of Technology Adapters require the creation of a database that holds the event table needed by event management framework



All WebSphere Adapters are now included in Resource Adapters directory of WebSphere Integration Developer installation. External service wizard uses the default location to import the RAR files into your WebSphere Integration Developer workspace. A J2EE connector project is created in the WebSphere Integration Developer workspace after the RAR file is imported.

The various RAR file names for the available WebSphere Adapters are shown. In the WebSphere Process Server System log files, the log messages associated with the adapter use the first five characters of the adapter name. For example, the message logs for Flat file adapter will start with “CWYFF”.

All of the Technology Adapters require the creation of a database to hold the event table needed by the event management framework

External dependencies for the adapter

- Add EIS external dependencies for the adapter as follows:

Adapter	Dependency files	Location
JDBC	JDBC 2.0 Database Driver	For WebSphere Integration Developer: Java™ Build Path of the adapter For WebSphere Process Server: WPS classpath
FlatFile	None	N/A
FTP	None	N/A
Email	None	N/A



This table displays the various dependencies of the external JAR files or the native libraries required for the adapter to work in WebSphere Integration Developer and WebSphere Process Server.

It also shows the location where the dependent files must be placed.

All Java JAR files for WebSphere Integration Developer must be added to the Adapter project Java build path. The Java JAR files for WebSphere Process Server have different locations based on the adapter.

External dependencies for the adapter

- Add EIS external dependencies for the adapter as follows:

Adapter	Dependency Files	Location
SAP	JAR file: sapco.jar	For WebSphere Integration Developer: Java Build Path of the adapter For WebSphere Process Server: <WPS_INSTALL>\lib directory
	Native libraries: <ul style="list-style-type: none"> ▪ librfc2.dll (or .so) ▪ MSVCP71.dll (or .so) ▪ Msvcr71.dll (or .so) ▪ sapjcorfc.dll (or .so) 	For WebSphere Integration Developer: <WID_INSTALL>\eclipse\jre\bin For WebSphere Process Server: <WPS_INSTALL>\bin directory
PeopleSoft	PeopleSoft Component Interface JAR that provides APIs for one or more PeopleSoft components	Bundle within the RAR file
Siebel	For Siebel 7.7: Siebel.jar and SiebelJL_enu.jar For Siebel 7.5: SiebelJL_Common.jar, SiebelJL_enu.jar and SiebelJL.jar	For WebSphere Integration Developer: Java Build Path of the adapter For WebSphere Process Server: <WPS_INSTALL>\lib directory

11

Installation and deployment

© 2008 IBM Corporation

For SAP and Siebel, the Jar files should be placed in the “lib” directory of the Server installation directory. For PeopleSoft, they should be bundled within the RAR file by importing the JAR file and adding it to the Adapter project.

Only SAP requires native libraries and they should be added to the Java native library class path. For WebSphere Integration Developer, it is the eclipse jre/bin directory, whereas for WebSphere Process Server, it is the install/bin directory.

External dependencies for the adapter

- Add EIS external dependencies for JDE adapter as follows:

8.9 (SP1,SP2), 8.93	8.94	8.95	
kernel.jar	kernel.jar	Connector.jar	BizLogicContainerClient_JAR.jar
Connector.jar	Connector.jar	JDBJBase_JAR.jar	ApplicationAPIs_JAR.jar
database.jar	database.jar	JdbjInterfaces_JAR.jar	ApplicationLogic_JAR.jar
log4j.jar	log4j.jar	JdeNet_JAR.jar	jdeinterop.ini
xerces.jar	xerces.jar	Spec_JAR.jar	jde.ini
xalan.jar	xalan.jar	System_JAR.jar	jdelog.properties
jdeinterop.ini	jdeutil.jar	Base_JAR.jar	JDBC driver
jdeLog.properties	jdbj.ini	log4j.jar	
JDBC driver	jdeinterop.ini	xerces.jar	
	jdelog.properties	xalan.jar	
	JDBC driver	PMApi_JAR.jar	
		BizLogicContainer_JAR.jar	

For the JDE adapter, depending on the version of JDE software you are using, each version requires different Jar files and properties files.

Creating adapter SCA application in WebSphere Integration Developer

- Run Enterprise Service Discovery function for the adapter
 - ▶ This creates the Inbound or Outbound SCA component, which can then be used in a SCA module to connect to other components
- Complete Service Component Architecture (SCA) application assembly
- Optionally, use the Integrated WebSphere Process Server to test the inbound or outbound interaction
 - ▶ Need to make sure to setup the dependencies of the JAR files or the DLLS for the Integrated WebSphere Process Server
- Export the module containing the SCA application and the RAR file as Enterprise Archive file (EAR) to be installed to WebSphere Process Server
 - ▶ Note that all WebSphere Adapters need to be packaged with the application within the EAR file

The steps required to create the Adapter SCA components in WebSphere Business Integration are shown here from a high level.

Once the adapter is imported and the external dependencies satisfied, run the Enterprise Service Discovery tool. Based on the selection in the wizard of the discovery tool, either the inbound or outbound SCA components will be created. These SCA components are used in the business process application by wiring them to other components using the Application Assembly editor. The application can be tested in WebSphere Integration Developer using the integrated WebSphere Process Server and The Adapter SCA components can be tested in isolation using the Test Component functions in WebSphere Integration Developer. Once satisfied with the unit test, the business process application can be exported as an EAR file and deployed to a WebSphere Process Server.


Section

Enterprise metadata discovery using the external service wizard

This section outlines the common tasks for all the adapters in the discovery process using the new external service wizard in WebSphere Integration Developer.

Enterprise service discovery

- File > New > External Service
- Select the Adapter

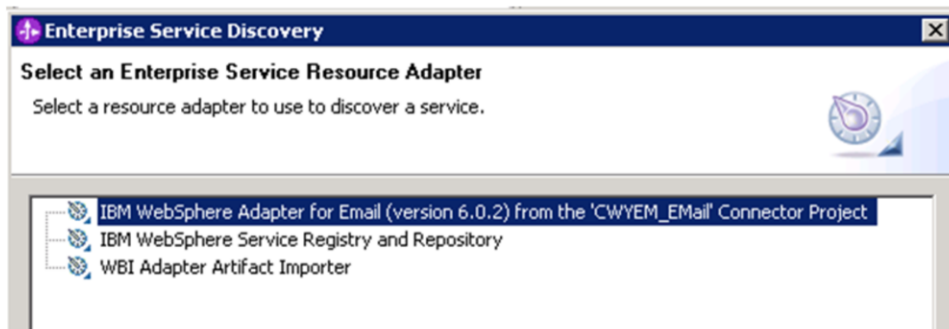

15

Installation and deployment

© 2008 IBM Corporation

From WebSphere Integration Developer, start the external service wizard and select the adapter you want to work with from the displayed list. The external service wizard generates EIS import SCA component for outbound, EIS export SCA component for inbound, along with the business objects, WSDL files and other artifacts based on your selection of options in the wizard. The EIS SCA components can then be wired with other SCA components that make up the business application.

Enterprise service discovery

The image displays three screenshots of the 'External Service' wizard's 'Required Files and Libraries' panel, each with a yellow callout box highlighting the specific dependencies:

- SAP dependencies:** The first screenshot shows fields for 'SAP sapjco.jar file', 'System library file (libfc32.dll or libfcem.so)', and 'System library file (sapjcofc.dll or libsapjcofc.so)'. A callout box labeled 'SAP dependencies' points to the first field.
- Siebel dependencies:** The second screenshot shows fields for 'Siebel.jar file', 'Language-specific library', 'SiebelUI_<language code>.jar file', 'Library needed only for Siebel 7.5 or earlier', and 'SiebelUI_Common.jar file'. A callout box labeled 'Siebel dependencies' points to the 'Siebel.jar file' field.
- PeopleSoft dependencies:** The third screenshot shows fields for 'PeopleSoft psjco.jar file' and 'Component Interface JAR file'. A callout box labeled 'PeopleSoft dependencies' points to the 'PeopleSoft psjco.jar file' field.

On the right side of the image, a larger screenshot shows the 'Required Files and Libraries' panel for 'JD Edwards Enterprise One dependencies'. It features a tree view for selecting the version (8.9 SP1/SP2, 8.93, 8.94, 8.95, 8.96) and a list of files including 'Connector.jar', 'database.jar', 'jdbi.jar', 'jdbinterop.jar', 'jdelog.properties', 'jdelutil.jar', 'kernel.jar', 'log4j.jar', 'xalan.jar', and 'xerces.jar'. A callout box labeled 'JD Edwards Enterprise One dependencies' points to the version selection area.

At the bottom of the screenshots, there is a footer with the text 'Installation and deployment' and '© 2008 IBM Corporation'.

External service wizard provides a panel in V6.1 where all the dependencies for the adapter can be specified. You do not need to manually add the dependency files to the class path as was required in previous versions of adapters. The screen captures above show you the panels for specifying the dependency files for various application adapters

Section

Deployment in WebSphere Process Server

This section describes, at a high level, deploying a business process application built in WebSphere Integration Developer to a WebSphere Process Server.

The adapter's external dependencies must be satisfied and the J2C authentication alias for the outbound request must be specified.

Deployment in WebSphere Process Server

- Install application EAR file in the WebSphere Process Server using the administrative console or command line tool “wsadmin”
 - ▶ For most install steps, defaults are fine
- If needed, modify any Adapter related properties (from Your application -> Connector Modules -> <Adapter.rar>)
 - ▶ Custom RAR properties
 - ▶ Managed Connection Factory for outbound connection to EIS
 - ▶ Activation Spec for inbound event from EIS
- Start the Enterprise application using administrative console or wsadmin



Continuing with application deployment in WebSphere Process Server, the business process application containing the adapter and the adapter SCA components must be installed in WebSphere Process Server. Either the administrative console or the wsadmin command line tool can be used for application installation. Once installed, the administrator can modify the adapter properties. The last task is to start the application, either in the console or through wsadmin.

Summary and references

- Summary
 - ▶ Common installation and deployment for all WebSphere Adapters
 - ▶ Need to perform some setup for some EIS



In summary, all the WebSphere adapters have a common installation strategy and similar steps for development and deployment of applications involving adapters.

References

- References
 - ▶ Information center
 - ▶ User guide
 - ▶ Support platforms
 - WebSphere Process Server:
<http://www.ibm.com/software/integration/wps/sysreqs/>
 - WebSphere Integration Developer:
<http://www.ibm.com/software/integration/wid/sysreqs/>
 - ▶ IBM Education Assistant

The Information Center and the User Guide for the adapters provide details of the installation process.

Trademarks, copyrights, and disclaimers

The following terms are trademarks or registered trademarks of International Business Machines Corporation in the United States, other countries, or both:

IBM WebSphere

Visual Basic, and the Windows logo are registered trademarks of Microsoft Corporation in the United States, other countries, or both.

J2EE, Java, JDBC, and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Product data has been reviewed for accuracy as of the date of initial publication. Product data is subject to change without notice. This document could include technical inaccuracies or typographical errors. IBM may make improvements or changes in the products or programs described herein at any time without notice. Any statements regarding IBM's future direction and intent are subject to change or withdrawal without notice, and represent goals and objectives only. References in this document to IBM products, programs, or services does not imply that IBM intends to make such products, programs or services available in all countries in which IBM operates or does business. Any reference to an IBM Program Product in this document is not intended to state or imply that only that program product may be used. Any functionally equivalent program, that does not infringe IBM's intellectual property rights, may be used instead.

Information is provided "AS IS" without warranty of any kind. THE INFORMATION PROVIDED IN THIS DOCUMENT IS DISTRIBUTED "AS IS" WITHOUT ANY WARRANTY, EITHER EXPRESS OR IMPLIED. IBM EXPRESSLY DISCLAIMS ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT. IBM shall have no responsibility to update this information. IBM products are warranted, if at all, according to the terms and conditions of the agreements (for example, IBM Customer Agreement, Statement of Limited Warranty, International Program License Agreement, etc.) under which they are provided. Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products in connection with this publication and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products.

IBM makes no representations or warranties, express or implied, regarding non-IBM products and services.

The provision of the information contained herein is not intended to, and does not, grant any right or license under any IBM patents or copyrights. Inquiries regarding patent or copyright licenses should be made, in writing, to:

IBM Director of Licensing
IBM Corporation
North Castle Drive
Armonk, NY 10504-1785
U.S.A.

Performance is based on measurements and projections using standard IBM benchmarks in a controlled environment. All customer examples described are presented as illustrations of how those customers have used IBM products and the results they may have achieved. The actual throughput or performance that any user will experience will vary depending upon considerations such as the amount of multiprogramming in the user's job stream, the I/O configuration, the storage configuration, and the workload processed. Therefore, no assurance can be given that an individual user will achieve throughput or performance improvements equivalent to the ratios stated here.

© Copyright International Business Machines Corporation 2008. All rights reserved.

Note to U.S. Government Users - Documentation related to restricted rights-Use, duplication or disclosure is subject to restrictions set forth in GSA ADP Schedule Contract and IBM Corp.