

SCLM Developer Toolkit



# Installation and Customization Guide

*Release 1*



SCLM Developer Toolkit



# Installation and Customization Guide

*Release 1*

**Note!**

Before using this information and the product it supports, be sure to read the general information under "Notices" on page 55.

**First Edition (July 2005)**

This edition applies to IBM SCLM Developer Toolkit, Release 1, Program Number 5655M9900 and to any subsequent releases until otherwise indicated in new editions. Make sure you are using the correct edition for the level of the product.

Order publications through your IBM representative or the IBM branch office serving your locality. Publications are not stocked at the address below.

A form for reader's comments is provided at the back of this publication. If the form has been removed, address your comments to:

IBM Corporation  
J87/D325  
555 Bailey Avenue  
SAN JOSE, CA 95141-1003  
United States of America

When you send information to IBM, you grant IBM a nonexclusive right to use or distribute the information in any way it believes appropriate without incurring any obligation to you.

© Copyright International Business Machines Corporation 2005. All rights reserved.

US Government Users Restricted Rights – Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.

---

# Contents

**Figures . . . . . v**

**Tables . . . . . vii**

**About This Document . . . . . ix**

Who should use this document . . . . . ix

Where to find more information . . . . . ix

    Hardcopy publications . . . . . ix

    Softcopy publications . . . . . x

    IBM Systems Center publications . . . . . x

**Installation overview . . . . . xiii**

TCP/IP considerations . . . . . xiii

Security considerations . . . . . xiii

SMP/E installation . . . . . xiii

Separate SCLM installation . . . . . xiv

**Chapter 1. Installing and customizing  
SCLM Developer Toolkit on z/OS . . . . . 1**

Step 1: Check z/OS software requirements . . . . . 1

Step 2: Run the install JCL . . . . . 1

Step 3: Customize the SCLM Developer Toolkit  
configuration files . . . . . 2

    Customize the ISPF configuration file . . . . . 2

    Customize the TRANSLATE configuration file . . . . . 2

Step 4: Configure the SCLM Developer Toolkit HTTP

Server . . . . . 4

    HTTP server configuration file customization . . . . . 5

    HTTP server environment file customization. . . . . 5

    HTTP server JCL/STARTED TASK customization . . . . . 6

Step 5: Configure long/short name table VSAM file . . . . . 7

Step 6: Install and customize ANT . . . . . 9

Step 7: Run the IVP process to check correct install  
and customization . . . . . 10

    Testing connection to the HTTP server . . . . . 13

Step 8: Download and install the Eclipse-based  
client on the users PC . . . . . 14

**Chapter 2. SCLM customization for the  
SCLM administrator . . . . . 23**

Language translators for JAVA/J2EE support . . . . . 23

JAVA/J2EE build summary . . . . . 23

    Java build . . . . . 23

    J2EE build . . . . . 24

    SCLM language definitions . . . . . 24

    SCLM types . . . . . 25

ASCII or EBCDIC storage options . . . . . 26

    ASCII/EBCDIC language translators . . . . . 27

    \$GLOBAL member . . . . . 28

    SITE and project-specific options . . . . . 29

**Chapter 3. CRON-initiated Builds and  
Promotes . . . . . 33**

STEPLIB and PATH requirements . . . . . 33

    CRON Build job execution . . . . . 34

    CRON Build job samples . . . . . 34

**Appendix A. Long/short name  
translation table. . . . . 37**

Technical summary of the SCLM Translate program . . . . . 37

Single long/short name record processing . . . . . 38

    FINDLONG Processing . . . . . 38

    FINDSHORT Processing . . . . . 38

    TRANSLATE Processing . . . . . 39

Multiple long/short name record processing . . . . . 39

    IMPORT processing . . . . . 39

    MIGRATE processing . . . . . 39

**Appendix B. Messages and codes . . . . . 41**

**Notices . . . . . 55**

Trademarks . . . . . 56

**Index . . . . . 57**



---

## Figures

1. Pass and exec directives. . . . .	7	15. Install Shield setup type Screen (Existing Eclipse). . . . .	20
2. Sample Long/Short Translate VSAM file JCL	8	16. Install Shield Selected Components Screen (Existing Eclipse). . . . .	20
3. HTTP server logon prompt . . . . .	11	17. Install Shield Components and Locations Screen (Existing Eclipse) . . . . .	21
4. Host installation and customization welcome screen . . . . .	11	18. Install Shield Install Summary Screen . . . . .	21
5. An example of validation responses (part 1)	12	19. Sample translators . . . . .	23
6. An example of validation responses (part 2)	13	20. Sample SCLM language translators . . . . .	25
7. Server Connection successful message. . . . .	14	21. SCLM types . . . . .	26
8. Client Download Index page. . . . .	15	22. SCLM Language Translators and ASCII/EBCDIC . . . . .	27
9. Install Shield Welcome Screen . . . . .	16	23. Sample SITE specific SCLM project setting	30
10. Install Shield Installation Overview Screen	16	24. Sample PROJECT specific SCLM project setting	31
11. Install Shield Installation Directory Screen (New Eclipse). . . . .	17	25. Sample CRON members . . . . .	33
12. Install Shield setup type Screen (New Eclipse)	18	26. Sample CRON Build Exec. . . . .	35
13. Install Shield Components and Locations Screen (New Eclipse) . . . . .	18	27. Sample Build parameter file . . . . .	36
14. Install Shield Installation Directory Screen (Existing Eclipse). . . . .	19	28. Sample REXX for Translate module invocation	40





---

## Tables

1.	Hardcopy Publications . . . . .	ix	5.	\$GLOBAL variables. . . . .	28
2.	IBM Systems Center Publications. . . . .	x	6.	SITE/Project options . . . . .	31
3.	httpd.conf customization . . . . .	5	7.	Long/Short name translation parameters	38
4.	httpd.env customization. . . . .	5			



---

## About This Document

This document contains the installation procedure for the IBM SCLM Developer Toolkit product, which combines standard z/OS<sup>®</sup> installation procedures with z/OS UNIX System Services and IBM z/OS HTTP server configuration.

From here on, the following names are used in this manual:

- The IBM z/OS HTTP server is called the “HTTP server”.

Sometimes, “IBM SCLM Developer Toolkit” is shortened to “SCLMDT”.

---

## Who should use this document

This document is written for system programmers who are installing, configuring and administering the IBM SCLM Developer Toolkit product. Readers should be familiar with the z/OS UNIX System Services environment, Hierarchical File System (HFS) structure, Resource Access Control Facility (RACF<sup>®</sup>) profiles needed to support z/OS UNIX System Services and started tasks (or the equivalent for the installed security product), and the HTTP server.

It also contains information to be used by the administrator of any SCLM projects that are using the Java<sup>®</sup> and z/OS UNIX System Services component languages. These administrators also need to be familiar with the z/OS UNIX System Services environment and HFS structures, REXX Script, and the Java Compiler and SCLM project and language definitions.

---

## Where to find more information

Where necessary, this document references information in other books, using shortened versions of the book title. For complete titles and order numbers of the books for all products that are part of z/OS, see z/OS Information Roadmap (GC28-1727). Direct your request for copies of any IBM publication to your IBM representative or to the IBM branch office serving your locality.

There is also a toll-free customer support number (1-800-879-2755) available Monday through Friday from 6:30 a.m. through 5:00 p.m. Mountain Time. You can use this number to:

- Order or inquire about IBM publications
- Resolve any software manufacturing or delivery concerns
- Activate the program reorder form to provide faster and more convenient ordering of software updates.

## Hardcopy publications

*Table 1. Hardcopy Publications*

Short Title Used in This Document	Title of Publication	Order Number
HTTP Server Guide	IBM HTTP Server for OS/390 HTTP Server Planning, Installing, and Using	SC31-8690
z/OS UNIX System Services Planning	OS/390 UNIX System Services Planning	SC28-1890

## Where to find more information

Table 1. *Hardcopy Publications (continued)*

Short Title Used in This Document	Title of Publication	Order Number
z/OS UNIX System Services Messages	OS/390 UNIX System Services Messages and Codes	SC28-1908
z/OS UNIX System Services Commands	OS/390 UNIX System Services Command Reference	SC28-1892
SCLM Project Manager's Guide	Interactive System Productivity Facility (ISPF) Software Configuration and Library Manager (SCLM) Developer's and Project Manager's Guide	SC34-4750
SCLM Reference	Interactive System Productivity Facility (ISPF) Software Configuration and Library Manager (SCLM) Reference	SC28-1320

## Softcopy publications

The z/OS library is available on the z/OS Collection Kit, SK2T-6700. This softcopy collection contains a set of z/OS and related unlicensed product books. The CD-ROM collection includes the IBM Library Reader™, a program that customers can use to read the softcopy books.

Softcopy z/OS publications are also available for Web browsing. PDF versions of the z/OS publications for viewing or printing using Adobe Acrobat Reader are available at this URL:

- <http://www.ibm.com/servers/eserver/zseries/zos>

Select "Library".

## IBM Systems Center publications

IBM Systems Center produced Redbooks™ that can be helpful in setting up and using z/OS UNIX System Services. You can order these publications through the usual channels, or you can view them with a Web browser from this URL:

<http://www.redbooks.ibm.com>

These books have not been subjected to any formal review nor have they been checked for technical accuracy, but they represent current product understanding (at the time of their publication) and provide valuable information about a wide range of z/OS topics. You must order them separately. A selected list of these books follows:

Table 2. *IBM Systems Center Publications*

Title of Publication	Order Number	Comments
P/390, R/390, S/390 Integrated Server: OS/390 New User's	Cookbook SG24-4757-01	Despite the title, it is oriented toward the system programmer, and describes considerations for the z/OS UNIX System Services environment.
Debugging UNIX System Services, Lotus Domino, Novell Network Services, and other Applications on OS/390	SG24-5613-00	Provides an overview of the z/OS UNIX System Services environment along with tips and suggestions for setup and problem analysis.

## Where to find more information

Table 2. IBM Systems Center Publications (continued)

Title of Publication	Order Number	Comments
OS/390 e-business Infrastructure: IBM HTTP Server 5.1 - Customization and Usage	SG24-5603-00	Provides an overview of Web servers in general with specific details for the OS/390 <sup>®</sup> server along with hints and tips for setup and customization.
Debugging UNIX System Services	SG24-5613-00	
e-business Enablement Cookbook for OS/390 Volumes 1, 2, and 3	SG24-5664-00 SG24-5981-00 SG24-5980-00	

## Where to find more information

---

## Installation overview

This manual contains the installation procedure for all components of SCLM Developer Toolkit. The procedure is a combination of standard z/OS installation procedures, z/OS UNIX System Services file set up, and HTTP server configuration.

The manual is structured into four main parts

- Chapter 1, "Installing and customizing SCLM Developer Toolkit on z/OS," on page 1
- Chapter 2, "SCLM customization for the SCLM administrator," on page 23
- Chapter 3, "CRON-initiated Builds and Promotes," on page 33
- The appendixes, starting at page 37

---

## TCP/IP considerations

When you are setting up the SCLM Developer Toolkit server, you also need to consider your site's installation of TCP/IP. SCLM Developer Toolkit uses an HTTP server and, therefore, needs to have the TCPIP.DATA file available to it. The UNIX System Services Planning Guide documents where the system finds this file. However, if you use another method of defining the location of this file (such as the System Resolver), you need to add a //SYSTCPD DD card to your SCLM Developer Toolkit server job. A TCP port needs to be available and it is good practice to reserve the port number. To understand more about the System Resolver and TCPIP.DATA, see the following publications:

- z/OS UNIX System Services Planning
- z/OS IBM Communications Server: IP Configuration Guide

---

## Security considerations

Each user that will use the SCLM Developer Toolkit must have a RACF OMVS, or equivalent, segment defined that specifies:

- A valid non-zero uid. The uid must be unique for each user.
- A valid home directory
- A valid shell

If these are not specified then the user will not be able to log on to the SCLM Developer Toolkit through the Eclipse IDE. If these are partially defined then unspecified errors may occur.

---

## SMP/E installation

This manual does not cover the implementation aspects of SCLM Developer Toolkit. Rather, it is intended to guide the installer through a successful configuration of the product. The manual assumes that the System Modification Program/Extended (SMP/E) installation of SCLM Developer Toolkit has been completed. The SMP/E instructions for SCLM Developer Toolkit are in the IBM SCLM Developer Toolkit Program Directory, GI10-3352. Before you begin the SCLM Developer Toolkit installation, take note that the following actions were recommended for the SMP/E installation:

- The root HFS file system was made read only

## SMP/E installation

- The SCLM Developer Toolkit directory was set up as a separate file system, mounted onto the root file system at /usr/lpp/SCLMDT (or whatever name you chose for your SCLM Developer Toolkit root directory).

These recommendations conform with those specified in the UNIX System Services Planning Guide (GA22-7800-02). See the section headed “Deciding How to Mount Your Root HFS for Execution” for full details.

Upon successful completion of the SMP/E install follow the directions in the next chapter to complete the install and customization on z/OS, and to download the Eclipse-based client on to the PC.

**Note:** It is recommended to have the BWBXXXXX modules reside in a dataset that is part of the LINKLIST. Alternatively this dataset may be added to the STEPLIB in the HTTP server (see “Step 4: Configure the SCLM Developer Toolkit HTTP Server” on page 4).

---

## Separate SCLM installation

This manual does not cover the implementation and loading of the SCLM product.



---

## Chapter 1. Installing and customizing SCLM Developer Toolkit on z/OS

This chapter provides a list of the tasks required to install SCLM Developer Toolkit on your host z/OS system plus the tasks involved in installing the GUI component of the SCLM Developer Toolkit.

Steps 1 to 7 must be implemented by the z/OS Systems Programmer.

Step 8 is a PC-based installation that must be done by each user who wants to access SCLM using the SCLM Developer Toolkit.

For additional information on configuring SCLM Developer Toolkit for specific SCLM projects see Chapter 2, "SCLM customization for the SCLM administrator," on page 23. This chapter contains additional customization for:

- Site or SCLM project specific settings
- JAVA/J2EE language support

---

### Step 1: Check z/OS software requirements

To successfully install SCLM Developer Toolkit, the following system requirements must be in place at your installation:

- z/OS V1.4 or above (preferably V1.5 or later) with the following PTFs applied:
  - ISPF PTF UA02085 (z/OS V1.4 only)
  - For customers wishing to store files with long filenames in SCLM, the PTF that addresses ISPF APAR OA11426 and provides support for long/short filename (long/short name) translation.
- z/OS UNIX System Services
- REXX runtime or REXX alternate libraries (REXX.\*\*.SEAGLPA, or REXX.\*\*.SEAGALT). REXX alternate is shipped with SCLM Developer Toolkit if required to be installed.
- ANT runtime installed in UNIX System Services, if performing JAVA/J2EE builds. (Download openly available from <http://ant.apache.org/>).

See "Step 6: Install and customize ANT" on page 9.

- Java V1.3.1 (5655-D35) at service level dated May 10, 2003, or September 25, 2003 or later.

---

### Step 2: Run the install JCL

1. Customize and run BWBINST1, which resides in the SBWBSAMP dataset.  
Follow the customization instructions within the member.

This job performs the following tasks:

- Creates CONFIG, LOGS and WORKAREA directories in the z/OS HFS at the directory specified by user customization.
- Creates the PROJECT directory in the z/OS HFS under the CONFIG directory. For more information on the use of the PROJECT directory see "SITE and project-specific options" on page 29.
- Copies the sample HTTP server configuration files from members BWBHTTPC and BWBHTTPE in the SBWBSAMP library to files `httpd.conf` and `httpd.env`

## Step 2: Run the install JCL

files in the CONFIG directory in the z/OS HFS install directory. These two files will require further tailoring. See “Step 4: Configure the SCLM Developer Toolkit HTTP Server” on page 4.

- Copies the Sample ISPF configuration table from member BWBISPF2 in the SBWBSAMP library to file ISPF.conf in the CONFIG directory in the z/OS HFS install directory. This file will require further tailoring. See “Step 4: Configure the SCLM Developer Toolkit HTTP Server” on page 4.
- Copies the sample Translation configuration table from member BWBTRANC in the SBWBSAMP library to file TRANSLATE.conf in the CONFIG directory in the z/OS HFS install directory. This file will require further tailoring. See “Step 3: Customize the SCLM Developer Toolkit configuration files.”

The recommended install directory for the configuration files is /var/SCLMDT. The /var directory must exist prior to this job being run.

SCLM Developer Toolkit users will require read and write access to the WORKAREA directory. By default users would require read and write access to /var/SCLMDT/WORKAREA. The WORKAREA is used for transfer of files, ASCII/EBCDIC conversions, and for JAVA/J2EE builds.

Temporary directories of format /var/SCLMDT/WORKAREA/userid/\* are created during the use of Developer Toolkit. The following directories may be created under a directory of the users userid in the WORKAREA directory depending on the type of functions they are performing:

- /EDIT
- /JobOutput
- /TRANSFER
- /VERSION

---

## Step 3: Customize the SCLM Developer Toolkit configuration files

The files ISPF.conf and TRANSLATE.conf reside at the default directory location /var/SCLMDT/CONFIG and may require further customization.

### Customize the ISPF configuration file

You must customize the ISPF configuration table ISPF.conf that resides in the install directory to host site requirements for ISPF dataset allocation. The provided sample ISPF.conf has instructions to complete customization and enables the user site to:

- Include the minimum ISPF dataset allocations for SCLM Developer Toolkit operation.
- Add additional DDNAME file allocations or concatenate additional ISPF datasets.
- Execute a customer defined allocation exec to provide further dataset allocation by Project or Userid. A sample exec is provided in member BWBISPF2 in the SBWBSAMP library.
- For batch operations ensure the ISPSLIB DD has the current ISPF/SCLM skeleton libraries allocated, as SCLM Developer Toolkit uses the standard allocated ISPF/SCLM skeletons.

### Customize the TRANSLATE configuration file

Review the TRANSLATE configuration file TRANSLATE.conf that resides in the install directory. Follow the instructions contained within the sample if different ASCII/EBCDIC conversion codepages are required, besides the default of ASCII=ISO8859-1 and EBCDIC=IBM-1047.

### Step 3: Customize the SCLM Developer Toolkit configuration files

The TRANSLATE.conf file provides keywords to determine how code is stored within SCLM. The provision to specify language types where files are binary transferred and stored, and also whether text based source remains in ASCII format rather than the default translation from ASCII to EBCDIC.

Additionally SCLM language types control whether longname files are converted to suitable valid short hostnames to store in SCLM. This long to short name mapping is controlled by the SCLM long/short name translate file.

**Note:** Default language types have been provided as a guide to use for determining long to shortname conversions, and/or BINARY transferred language types.

The following keywords are valid within the TRANSLATE.conf file:

<b>Keyword</b>	<b>Description</b>
<b>CODEPAGE</b>	<p>Determines the ASCII and EBCDIC codepages to use in translation</p> <p>Format:</p> <ul style="list-style-type: none"><li>• CODEPAGE ASCII = ISO8859-1</li><li>• CODEPAGE EBCDIC = IBM-1047</li></ul> <p>There must be a CODEPAGE keyword for both ASCII and EBCDIC for SCLM Developer Toolkit to determine how to convert files being transferred.</p>
<b>TRANLANG</b>	<p>This keyword determines which SCLM Language types require no ASCII/EBCDIC translation to the host (File will be binary transferred).</p> <p>If files were ASCII text they will remain in that ASCII codepage. ASCII/EBCDIC translation will take place for files by default.</p> <p>Format:</p> <ul style="list-style-type: none"><li>• TRANLANG JAVABIN</li><li>• TRANLANG DOC</li><li>• TRANLANG JPEG</li></ul> <p>In the above examples dummy Language Translators would be set up in SCLM for these languages. See Chapter 2, "SCLM customization for the SCLM administrator," on page 23 for more information on SCLM Language translators.</p>
<b>LOGLANG</b>	<p>This keyword determines which SCLM Language types require longname to shortname conversion. Longname to shortname translation implies the longname file on the Client (including directory package structure) will be mapped to a valid host member name of 8 characters and stored in SCLM using this translated host short name.</p> <p>Format:</p> <ul style="list-style-type: none"><li>• LOGLANG JAVA</li><li>• LOGLANG J2EEPART</li><li>• LOGLANG DOC</li></ul> <p>If the SCLM Language is not specified in the LOGLANG keyword then the Client file is assumed to already be in host short name format (8 characters or less) and is stored as is.</p>

## Usage scenario of the TRANSLATE configuration file

### Usage scenario of the TRANSLATE configuration file

As stated above, the TRANSLATE configuration files control a number of things. Two of these are:

- Whether or not a part is going to be ASCII to EBCDIC translated.
- Whether a part is going to have its name translated from a long name to an 8 character short name.

To show how these two settings could be used to help in deciding how to initially set up this config file here is a usage scenario.

**Usage scenario:** You have a number of Word documents that you wish to store in SCLM. In this case files of this type cannot be edited on the mainframe. So there is no point in translating them to EBCDIC and they should just be stored in ASCII.

- Create an SCLM Language translator based on the sample BWBTRANJ in the SBWBSAMP library. You could call it BINARY (as this is how it will be stored), or if you want to be specific, call it DOC.
- As this file has a longname on the workstation, such as InstallGuide.doc, you need to make sure this is mapped to a generated short name in the SCLM PDS where you will store it. Therefore create a LONGLANG entry for the BINARY or DOC language, whatever you have called it.
- Add a TRANLANG entry for the BINARY or DOC language, whatever you have called it.
- When the Word document is checked out in SCLM it will be transferred down to the Eclipse workspace without any EBCDIC to ASCII conversion. Word will be started to work on the file. When changes are complete the Word document is checked back into SCLM and again no ASCII to EBCDIC translation takes place.

---

## Step 4: Configure the SCLM Developer Toolkit HTTP Server

The SCLM Developer Toolkit interface uses a web server to communicate with the Developer Toolkit client in WebSphere®. This section describes the setup and customization of an HTTP server that is needed by the client to access SCLM on a z/OS host. It is recommended that this is a dedicated web server to support this interface, though optionally you may incorporate the required SCLM /HTTP configuration directives into an existing HTTP server.

See “Customizing an existing HTTP server for SCLM support” on page 6. By default the SCLM/HTTP server is configured to use port 80 though you may choose another suitable dedicated port during customization (1024 or higher as port numbers lower than this are reserved for internal systems use).

If you change the default port number it must be changed in the overriding server JCL.

The sample setup requires the end user to supply a valid z/OS userid and password when accessing the host system using this interface.

**Note:** For additional information on configuring IBM HTTP web servers, review these IBM manuals:

- HTTP Server Planning, Installing, and Using manual
- OS/390 e-business Infrastructure: IBM HTTP Server 5.1 — Customization and Usage (Red Book)

For the publication order numbers for these books, see “Where to find more information” on page ix.

## Step 4: Configure the SCLM Developer Toolkit HTTP Server

The following sections outline the steps for customizing the supplied samples and starting the HTTP server.

By default the HTTP server configuration file and the environment file reside in the SCLM Developer Toolkit install directory. Optionally these files may be copied to another user directory or existing server configuration and environment files used. In all cases the HTTP server started task must be customized to reflect the appropriate directory.

### HTTP server configuration file customization

Customize the sample HTTP configuration file `httpd.conf` (which resides in the install directory specified by install job `BWBINST1`) by following the instructions in the configuration file for the changes that are needed. The following directives need to be reviewed:

Table 3. *httpd.conf* customization

Directive	Description of change
Port	Leave as port 80 or change to a valid port number as specified in the HTTP server JCL. It is good practice to reserve the port number.
Protection and ServerId	Change <code>SCLMDTWB</code> to the name of the HTTP server job.
PidFile AccessLog ErrorLog	Change <code>/var/SCLMDT</code> to the appropriate path if a different path to the default was selected.
Pass and Exec Directives	Change <code>/var/SCLMDT</code> to the appropriate path if a different path to the default was selected.  Change <code>/usr/lpp/SCLMDT</code> to the appropriate path of the bin install directory if a different path to the default was selected.
Non-standard codepage translation in SCLM Developer Toolkit	If users require different ASCII/EBCDIC codepage translation other than standard default (IBM-1047/ISO8859-1) the following parameters must be coded in the <code>httpd.conf</code> file for the HTTP server:  <code>DefaultFsCp ebcdic-codepage</code> <code>DefaultNetCp ascii-codepage</code>  For example, for Japanese translation the required codepages would be:  <code>DefaultFsCp IBM-939</code> <code>DefaultNetCp IBM-932C</code>

### HTTP server environment file customization

Customize the sample HTTP environment variables file `httpd.env` (which resides in the install directory specified by install job `BWBINST1`) by following the instructions in the environment file for the changes that are needed.

Table 4. *httpd.env* customization

Directive	Description of change
PATH	Ensure the <code>PATH</code> directive has the correct Java path directory

## Step 4: Configure the SCLM Developer Toolkit HTTP Server

Table 4. *httpd.env customization (continued)*

Directive	Description of change
CGI_VCMPATH	This directive determines the HOME directory path where the configuration files reside. The default is: CGI_VCMPATH=/var/SCLMDT
CGI_TRANTABLE	This directive determines the name of the translate table used in short to long name translation. This VSAM file is discussed in “Step 5: Configure long/short name table VSAM file” on page 7. The default is: CGI_TRANTABLE=SCLMDT.LSTRANS.FILE

### HTTP server JCL/STARTED TASK customization

Before the HTTP server can be submitted the following tasks must be performed:

1. Copy the sample batch job BWBSRVR from the installed sample library to a JCL Library or PROCLIB dataset and customize to your site specific standards and information by following the instructions in the sample.
2. Issue the CAPS OFF command to ensure that case sensitive values do not get changed to upper case.
3. It is recommended to make this HTTP server job a started task. But it can be run as a standalone job in order to test the HTTP server JCL.
4. If performing foreground Java builds it is recommended to use a region size of 128M in the HTTP server job.
5. RACF considerations:
  - Create a RACF OMVS segment for the userid assigned to the started task or if submitting the server as a job, the userid assigned to the job.
  - The HTTP server owning userid should have read access to the BPX.SERVER facility class.
  - The HTTP server owning userid requires execute access to the /usr/lpp/internet/sbin files and read/write access to the LOGS directory referenced in the httpd.conf file. This is defaulted to /var/SCLMDT/LOGS.
6. The default port to be used is 80. If you change this to a specific dedicated port you must also change the port number in the httpd.conf configuration file to match the port number in the started task JCL.
7. If the BWBXXXXX modules do not reside in the LINKLIST then edit the STEPLIB to specify the load library containing these modules. By default these are in the SBWBLOAD library.

If the module BWBTSOW is included in this dataset then the dataset must be APF authorized.
8. Ensure a REXX/370 runtime environment on the host exists or alternatively use the REXX/370 Alternate Library supplied with SCLM Developer Toolkit.

The REXX runtime library REXX.\*\*.SEAGLPA (or if not installed, the alternate library REXX.\*\*.SEAGALT) must be added to the STEPLIB in the HTTP server’s JCL if they are not already defined as LINKLIST datasets.

These datasets must be APF authorized.

### Customizing an existing HTTP server for SCLM support

Follow the instructions below if you optionally choose to incorporate the SCLM Developer Toolkit support into an existing HTTP server.

Add the following pass/exec directives in the httpd.conf configuration file:

## Step 4: Configure the SCLM Developer Toolkit HTTP Server

---

Pass	/J2EPUT/	/var/SCLMDT/WORKAREA/*
Pass	/DWGET/	/var/SCLMDT/WORKAREA/*
Pass	/DWTRANSFER/	/var/SCLMDT/WORKAREA/*
Pass	/BWBIVP.html	/usr/lpp/SCLMDT/bin/BWBIVP.html
Pass	/SCLMDW.html	/usr/lpp/SCLMDT/bin/SCLMDW.html
Pass	/DT*	/usr/lpp/SCLMDT/bin/DT*
Exec	/BWBCALL	/usr/lpp/SCLMDT/bin/BWBCALL
Exec	/BWBIVP.cgi	/usr/lpp/SCLMDT/bin/BWBIVP.cgi

---

Figure 1. Pass and exec directives

**Note:** The following tailoring should be made to this example:

- Replace /usr/lpp/SCLMDT with your bin install directory.
- Replace /var with your Configuration/Workarea directory (may be the same as the bin directory).

### Start the SCLM Developer Toolkit HTTP server

Start the web server by submitting the job or if a started task procedure enter the following command from the z/OS console:

```
/S server_proc_name.
```

(Ensure the procedure is a member in a PROCLIB dataset.) Check the HTTP server has successfully initialized. If the verbose trace is set on (-vv flag in Started Proc PARM) the server JOBLOG should contain the message:

```
AcceptExtended... Waiting for connection...
```

---

## Step 5: Configure long/short name table VSAM file

SCLM Developer Toolkit provides the ability to store long name files (which are files with names greater than 8 bytes in mixed case) into SCLM. This is achieved through a VSAM file that contains the mapping of the long file name to the 8 character member name used in SCLM.

This facility is provided via a base ISPF/SCLM PTF that addresses APAR OA11426. This PTF must be applied before the long to short name translation can be used.

If this installation of SCLM Developer Toolkit is going to utilize this facility then the PTF providing the facility is installed and the VSAM file containing the mapping from long to short name can then be allocated. To do so, the following sample JCL, supplied with the PTF, can be modified and submitted.

## Step 5: Configure long/short name table VSAM file

---

```
//FLM02LST JOB <JOB PARAMETERS>
//* -----
//* ALLOCATION OF LONGNAME/SHORTNAME VSAM FILE
//*
//* THIS JOB ALLOCATES THE LONGNAME TO SHORTNAME TRANSLATE FILE.
//* THIS TRANSLATE FILE IS REQUIRED FOR THE FOLLOWING SCLM SUITE
//* PRODUCTS - SCLM DEVELOPER TOOLKIT AND SCLM ADMIN TOOLKIT.
//* THE ONE TRANSLATE FILE IS RECOMMENDED TO BE DEFINED AND USED
//* FOR ALL SCLM PROJECTS.
//*
//*
//* CAUTION: THIS IS NEITHER A JCL PROCEDURE NOR A COMPLETE JOB.
//* BEFORE USING THIS SAMPLE, YOU WILL HAVE TO MAKE THE
//* FOLLOWING MODIFICATIONS:
//*
//* 1) ADD THE JOB PARAMETERS TO MEET YOUR SYSTEM REQUIREMENTS
//*
//* 2) CHANGE ALL REFERENCES OF HLQ.LSTRANS.FILE BELOW TO YOUR
//*     REQUIRED NAMING CONVENTION FOR THE SCLM TRANSLATE FILE.
//* -----
//IDCAMS EXEC PGM=IDCAMS
//SYSPRINT DD SYSOUT=*
//SYSIN DD *
DELETE HLQ.LSTRANS.FILE
SET MAXCC=0
DEFINE CLUSTER(NAME(HLQ.LSTRANS.FILE)                -
               MANAGEMENTCLASS(STANDARD)            -
               RECSZ(58 2048)                        -
               INDEXED                               -
               CYLINDERS(1 1)                       -
               SHR(3,3)                              -
               KEYS (8 0))                          -
DATA(NAME(HLQ.LSTRANS.FILE.DATA))                  -
INDEX(NAME(HLQ.LSTRANS.FILE.INDEX))
/* DEFINE ALTERNATE INDEX WITH NONUNIQUE KEYS -> ESDS */
DEFINE ALTERNATEINDEX (                             -
    NAME(HLQ.LSTRANS.FILE.AIX)                      -
    RELATE(HLQ.LSTRANS.FILE)                        -
    RECORDSIZE(58 2048)                             -
    CYLINDERS(1 1)                                  -
    KEYS(50 8)                                       -
    NONUNIQUEKEY                                    -
    UPGRADE )
DATA (
    NAME(HLQ.LSTRANS.FILE.AIX.DATA) )
INDEX (
    NAME(HLQ.LSTRANS.FILE.AIX.INDEX) )
```

---

Figure 2. Sample Long/Short Translate VSAM file JCL (Part 1 of 2)



## Step 5: Configure long/short name table VSAM file

---

```
/*
/** -----
/** NOTE: THE FOLLOWING STEP WILL GET RC=4 DUE TO THE ALTERNATE
/**       INDEX BEING EMPTY. THE MESSAGES RETURNED ARE AS FOLLOWS.
/**
/**       IDC3300I  ERROR OPENING HLQ.LSTRANS.FILE
/**       IDC3351I  ** VSAM OPEN RETURN CODE IS 100
/**       IDC0005I  NUMBER OF RECORDS PROCESSED WAS 1
/**       IDC0001I  FUNCTION COMPLETED, HIGHEST CONDITION CODE WAS 4
/** -----
//IDCAM2  EXEC PGM=IDCAM5
//SYSPRINT DD  SYSOUT=*
//INITREC DD  *
INITREC1
/*
//SYSIN DD  *
        REPRO INFILE(INITREC) -
              OUTDATASET(HLQ.LSTRANS.FILE)

        BLDINDEX IDS(HLQ.LSTRANS.FILE)          -
              ODS(HLQ.LSTRANS.FILE.AIX)

        IF LASTCC = 0 THEN                      -
              DEFINE PATH (                     -
                    NAME(HLQ.LSTRANS.FILE.PATH) -
                    PATHENTRY (HLQ.LSTRANS.FILE.AIX))
/*
```

---

Figure 2. Sample Long/Short Translate VSAM file JCL (Part 2 of 2)

For more information on the Long to Short name translation process see Appendix A, “Long/short name translation table,” on page 37.

---

## Step 6: Install and customize ANT

This step is required if you intend to use the JAVA/J2EE build support in SCLM.

ANT is openly available and can be downloaded from <http://ant.apache.org/>. ANT text files and scripts are distributed in ASCII format and require an ASCII/EBCDIC translation to run on z/OS in UNIX System Services. A sample translate script has been supplied in the SCLM Developer Toolkit SBWBSAMP library in sample member BWBTRANT and a sample copy job to copy the translate script into the appropriate ANT directory in sample member BWBCPANT. Follow the steps below to implement ANT on z/OS:

- Download latest ANT zip file into the z/OS HFS and unzip into the appropriate directory. (If the file is a TAR file, use the TAR extract command `tar -xf filename`, or if it is a zip file, use the Jar extract command `jar -xf filename`).
- Customize the install copy member BWBCPANT to include the ANT install directory and run the job to copy the translate script into the directory and translate (review the instructions contained within the sample member BWBCPANT).
- To check successful translation, locate a text file within the ANT directory such as the file README and browse.
- Before using ANT, set the z/OS UNIX System Services environment variable JAVA\_HOME so that it points to the Java home directory, for example:

```
JAVA_HOME=/usr/lpp/java/IBM/J1.3
```

## Step 6: Install and customize ANT

ANT will look for an ANT configuration file in the directory `/etc`, so we recommend creating an ANT configuration file named `ant.conf` and adding the variable `JAVA_HOME`. That is, in file `/etc/ant.conf` set:

```
JAVA_HOME=/usr/lpp/java/IBM/J1.3
```

Make sure the correct java path is included.

This variable may also be set in other ways:

- Define it in the system wide profile.
- Define it in the users own `.profile` member in their home directory.
- To test that the ANT initialization has been successful:
  - Add the ANT and Java bin directories to the environment variable `PATH`.

**Example:**

```
export PATH=/u/antdirectory/ANT/apache-ant.1.6.2/bin :/u/javadirectory/IBM/J1.3/bin:$PATH
```

- Run ANT to display the version.

**Example:**

```
ant -version
```

This should display the ANT version if ANT is successfully installed.

---

## Step 7: Run the IVP process to check correct install and customization

The HTTP server must be running and the IVP `pass/exec` directives configured in the `httpd.conf` file for successful verification processing.

From a browser, type the location URL address:

```
http://hostname:portnumber/BWBIVP.html
```

Where:

**hostname** Is the TCP/IP host name the HTTP server is running on.

**port number** Is the port used in the job and the `httpd.conf` file (default port 80).

If the HTTP server is running you will be prompted for a valid TSO userid and password for the system the web server is started on (Figure 3 on page 11).

## Step 7: Run the IVP process to check correct install and customization

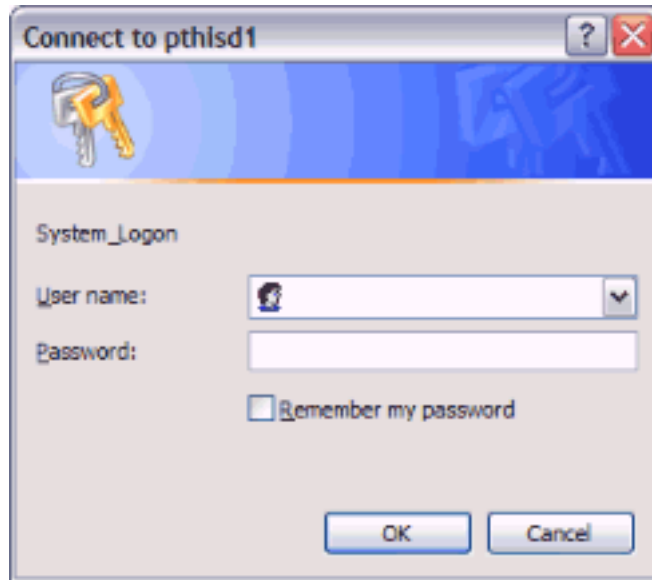


Figure 3. HTTP server logon prompt

Once you have entered your TSO userid and password the browser should initially display the html welcome screen (Figure 4).

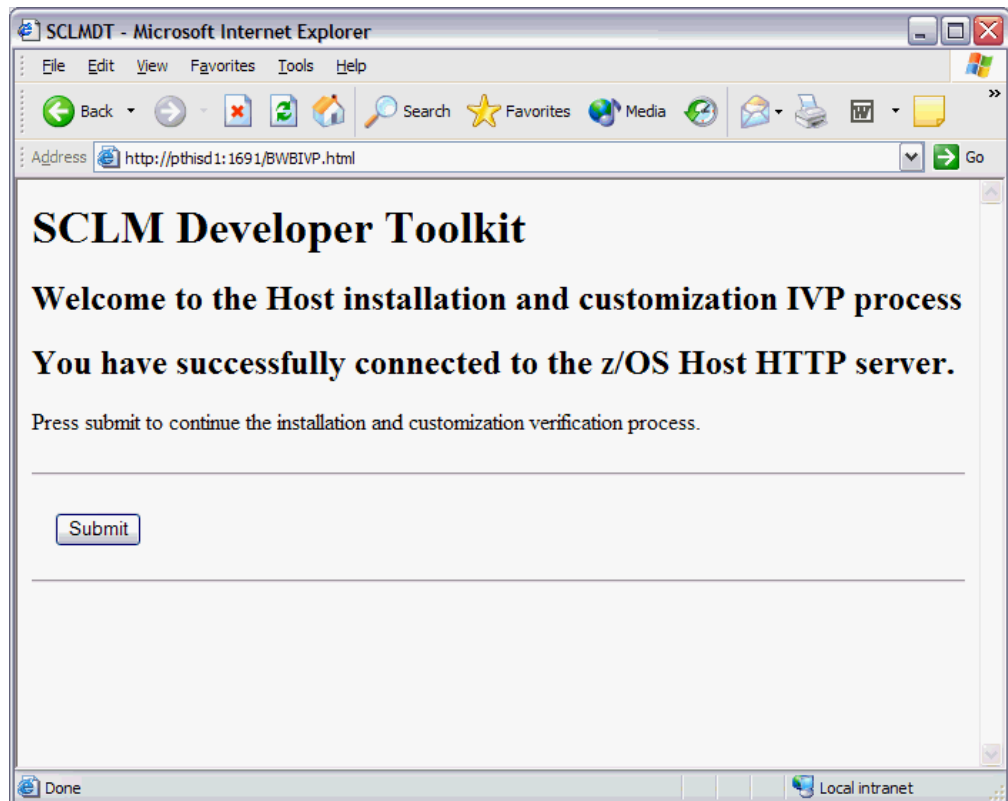


Figure 4. Host installation and customization welcome screen

If you fail to connect then check that:

- The HTTP server has successfully initialized.

## Step 7: Run the IVP process to check correct install and customization

- The HFS mount point containing the SCLM Developer Toolkit installation is mounted.
- The hostname:port are correct (try pinging the Hostname).
- There are no firewall restrictions.
- The PASS directive in the httpd.conf file is set correctly:

```
Pass    /BWBIVP.html          /installdirectory/SCLMDT/bin/BWBIVP.html
```

Once you receive the welcome screen, continue with the IVP process, which checks and validates your install and customization process.

The sample screen (Figure 5) gives an example of how the validation responses may look.


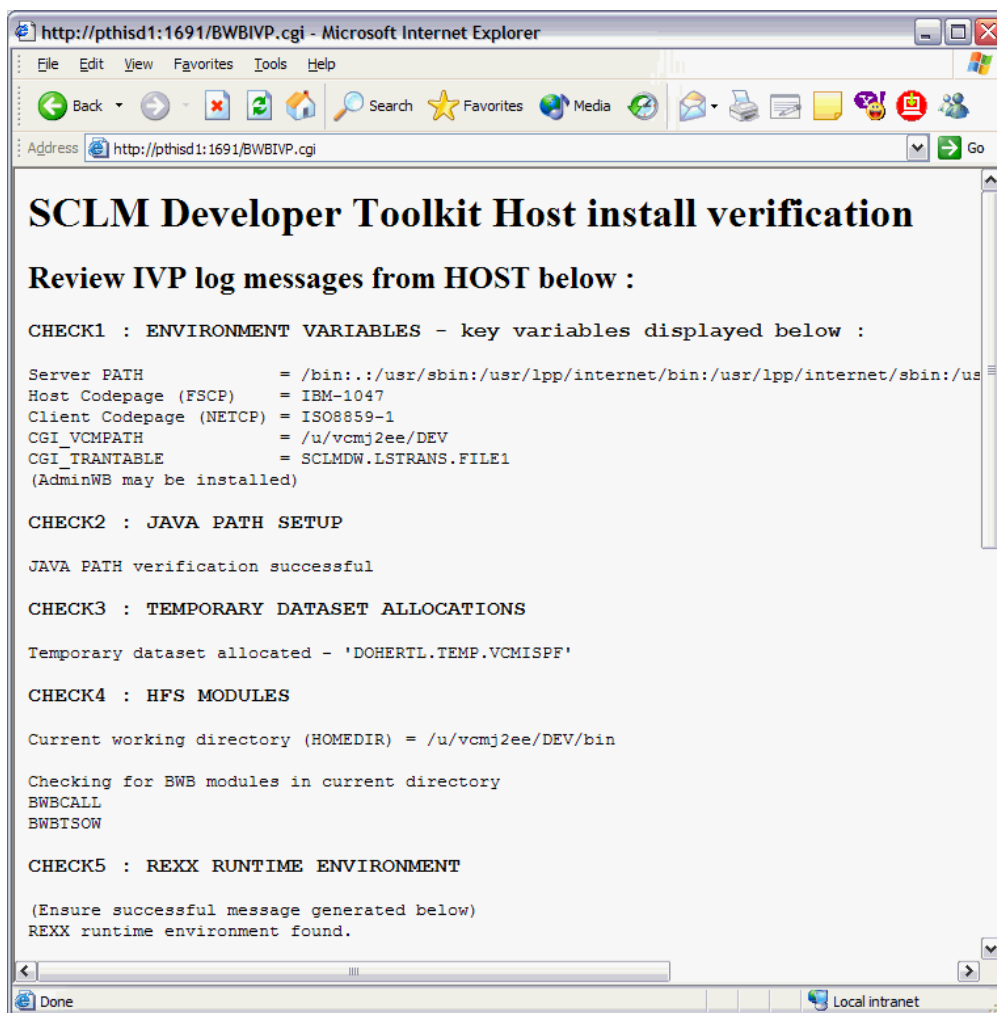


Figure 5. An example of validation responses (part 1)

## Step 7: Run the IVP process to check correct install and customization

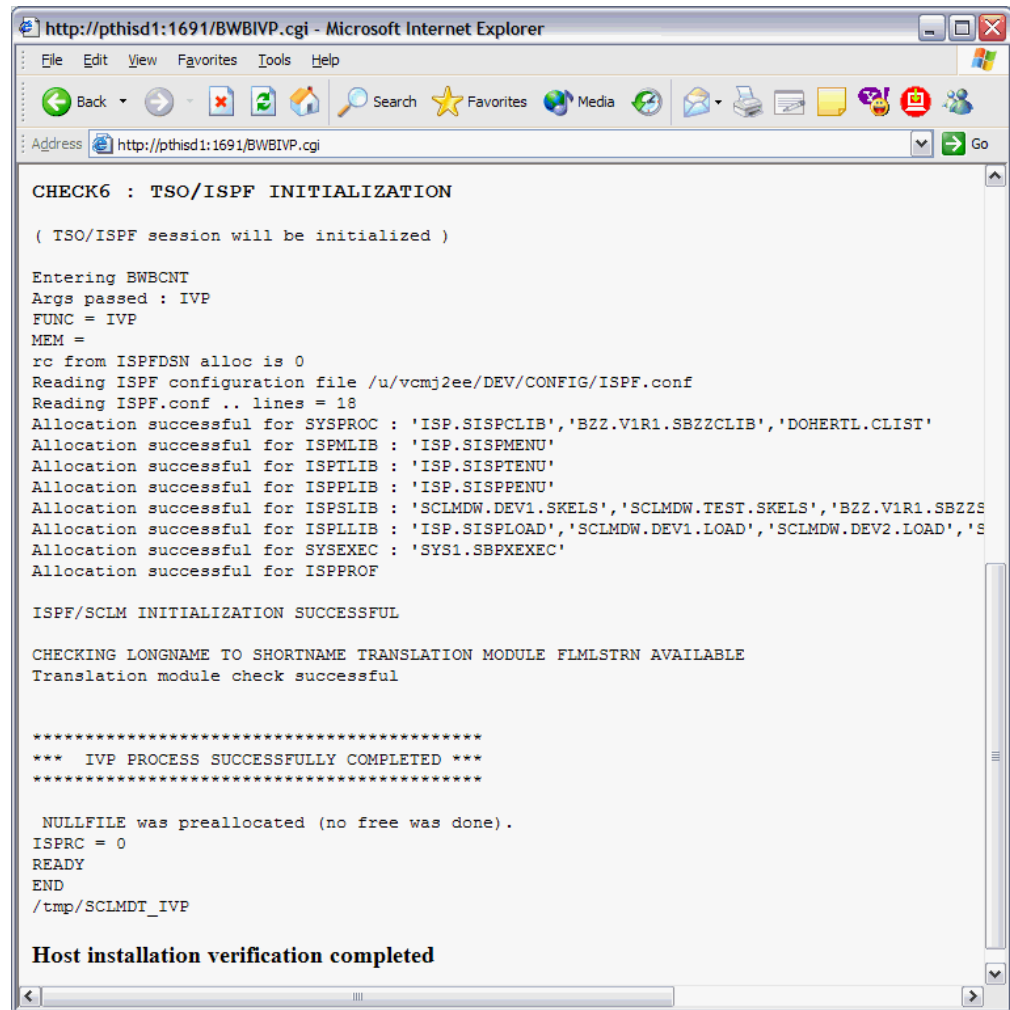

```
http://pthisd1:1691/BWBIVP.cgi - Microsoft Internet Explorer
File Edit View Favorites Tools Help
Address http://pthisd1:1691/BWBIVP.cgi

CHECK6 : TSO/ISPF INITIALIZATION

( TSO/ISPF session will be initialized )

Entering BWBCNT
Args passed : IVP
FUNC = IVP
MEM =
rc from ISPFDSN alloc is 0
Reading ISPF configuration file /u/vcmj2ee/DEV/CONFIG/ISPF.conf
Reading ISPF.conf .. lines = 18
Allocation successful for SYSPROC : 'ISP.SISPCLIB','BZZ.V1R1.SBZZCLIB','DOHERTL.CLIST'
Allocation successful for ISPFMLIB : 'ISP.SISPMENU'
Allocation successful for ISPFPLIB : 'ISP.SISPTENU'
Allocation successful for ISPFPLIB : 'ISP.SISPPENU'
Allocation successful for ISPSLIB : 'SCLMDW.DEV1.SKELS','SCLMDW.TEST.SKELS','BZZ.V1R1.SBZZS
Allocation successful for ISPLLIB : 'ISP.SISPLOAD','SCLMDW.DEV1.LOAD','SCLMDW.DEV2.LOAD','S
Allocation successful for SYSEXEC : 'SYS1.SBPXEXEC'
Allocation successful for ISPPROF

ISPF/SCLM INITIALIZATION SUCCESSFUL

CHECKING LONGNAME TO SHORTNAME TRANSLATION MODULE FIMLSTRN AVAILABLE
Translation module check successful

*****
*** IVP PROCESS SUCCESSFULLY COMPLETED ***
*****

NULLFILE was preallocated (no free was done).
ISPRC = 0
READY
END
/tmp/SCLMDT_IVP

Host installation verification completed
```

Figure 6. An example of validation responses (part 2)

## Testing connection to the HTTP server

At any time the server may be tested to check if running without running the full IVP process check.

From a browser, type the location URL address:

```
http://hostname:portnumber/SCLMDW.html
```

Where:

**hostname** Is the TCP/IP host name the HTTP server is running on.

**port number** Is the port used in the job and the httpd.conf file (default port 80).

You are prompted for a valid userid and password for the system the web server is started on.

The browser should then display the following message:

## Step 8: Download and install the Eclipse-based client on the users PC

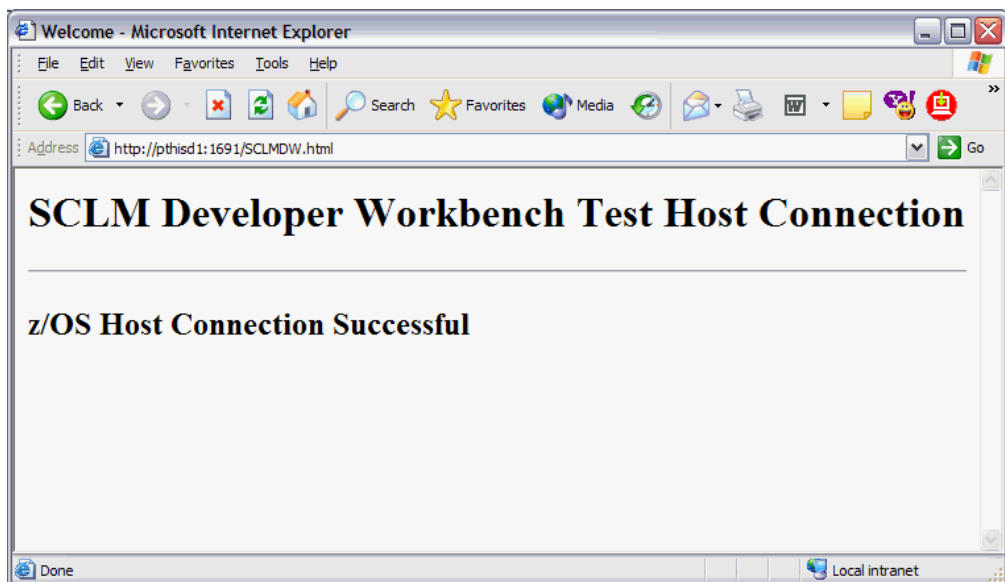


Figure 7. Server Connection successful message

---

## Step 8: Download and install the Eclipse-based client on the users PC

The IBM SCLM Developer Toolkit client package installs the workstation code required to run the application using Install Shield.

This installation product consists of two main components, IBM WebSphere Studio Workbench (WSWB) and IBM SCLM Developer Toolkit plug-ins. The plug-ins require an Eclipse base in which to run. WSWB provides this. Alternatively you may have an existing Eclipse based product such as WebSphere Application Developer into which the plug-ins can be installed.

The SCLM Developer Toolkit client package may be downloaded from the relevant z/OS HFS install directory via the Browser.

- Access the following URL from the browser (replace hostname and port with the relevant Host name and port number from the HTTP server customized in the previous steps):

`http://hostname:port/DTCClient.html`

Where:

**hostname** Is the TCP/IP host name the HTTP server is running on.

**port number** Is the port used in the job and the `httpd.conf` file (default port 80).

The browser should display the html download screen (Figure 8 on page 15).

## Step 8: Download and install the Eclipse-based client on the users PC

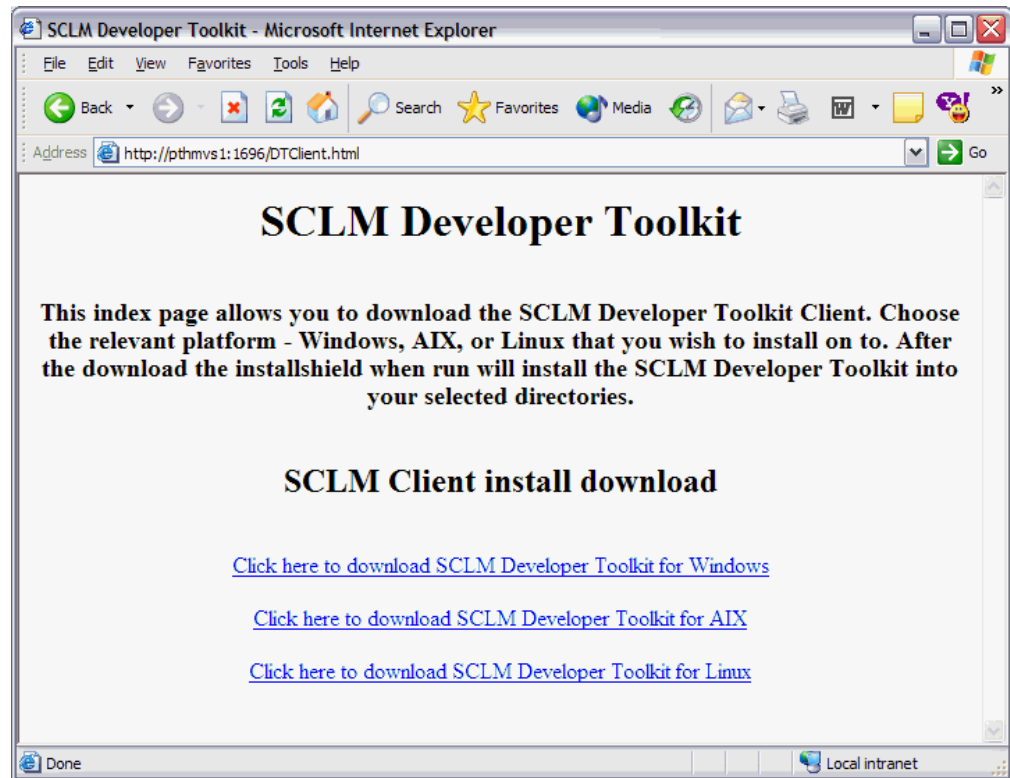


Figure 8. Client Download Index page

- From the list of client platforms as shown in (Figure 8), select the one is relevant for the operating system you are running. The Web Browser application will prompt you to open the file directly from the mainframe or save the file to a location on your machine. If you are saving the client install file on your machine, any location will suffice. If you are opening the file directly from the host the InstallShield process will start automatically. If you have saved the file onto your machine you must now run the install application. In Windows this can be done using the Run command from the Start menu or by double clicking on the file from Windows Explorer. In Linux™ and AIX™ the install program is run by opening a command line or terminal session and running the program as an ordinary UNIX command. Dependent on PATH information it may be necessary to have “./” prefix the command. User identity will be dependent on your system settings. Contact your systems administrator to determine under what user ID the program is to be installed under.
- The Welcome Screen is the first dialogue presented after running the installer

## Step 8: Download and install the Eclipse-based client on the users PC

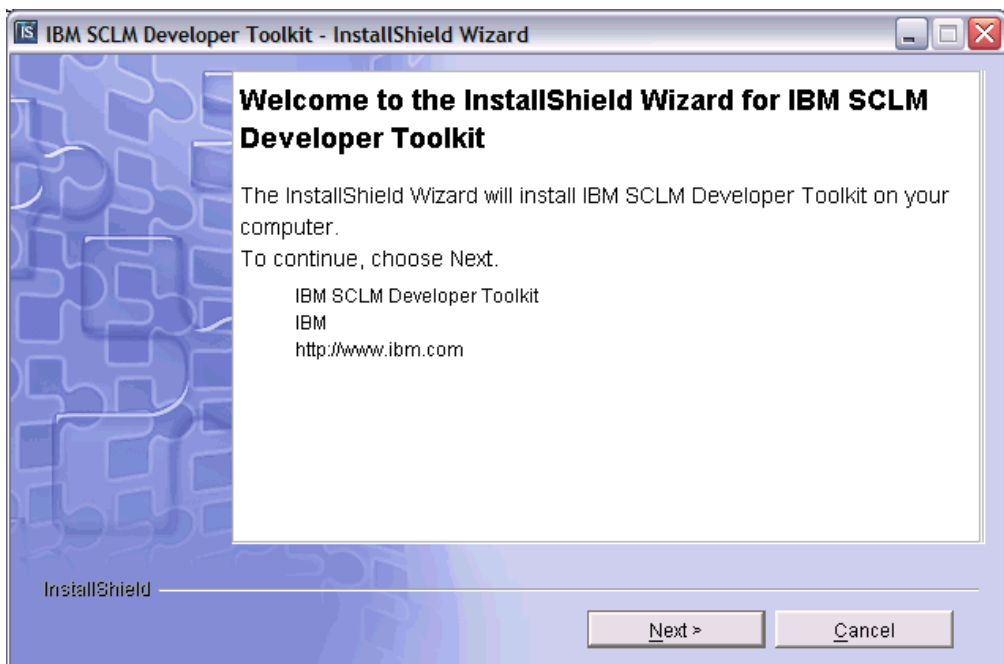


Figure 9. Install Shield Welcome Screen

- Clicking Next produces the Installation Overview dialogue.

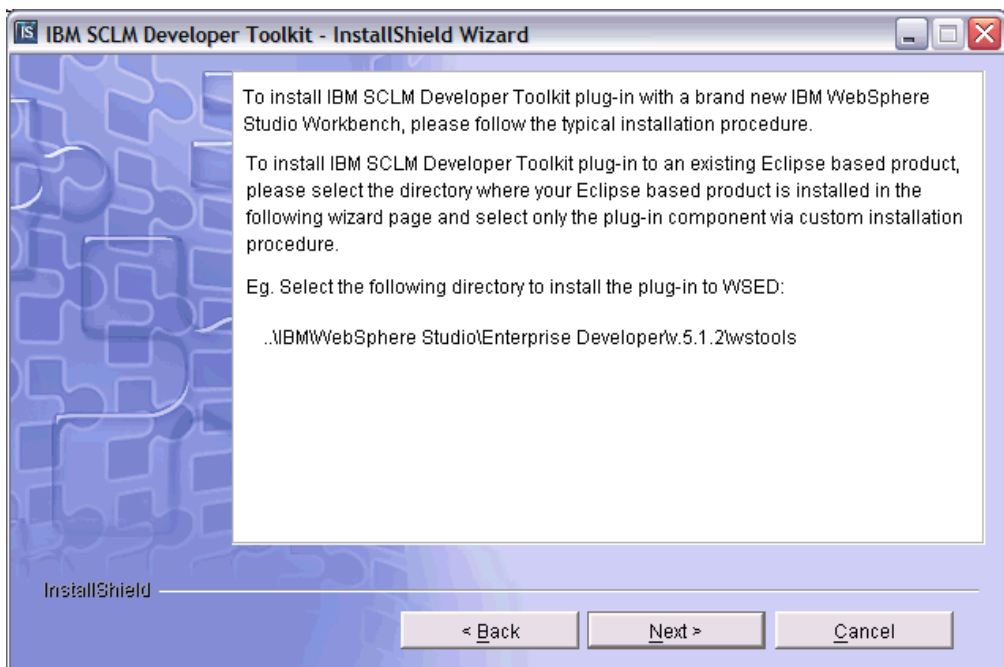


Figure 10. Install Shield Installation Overview Screen

- Two installation processes are available, Typical and Custom. These enable the user to install either the default configuration, IBM WebSphere Studio and the IBM SCLM Developer Toolkit plug-ins, or just the installation of the IBM SCLM Developer Toolkit plug-ins into an existing Eclipse base. Depending on which of



## Step 8: Download and install the Eclipse-based client on the users PC

these installations will be selected will slightly vary the Install Shield screens the user will navigate through, plus the information required to be input by the user will also vary.

- If the user is installing onto a machine that currently does not have Eclipse installed then the Typical installation should be selected. The location of the installation directory must be provided as detailed in Figure 11. This is the location you wish to install the WSWB version of Eclipse plus the SCLM Developer Toolkit plug-ins.

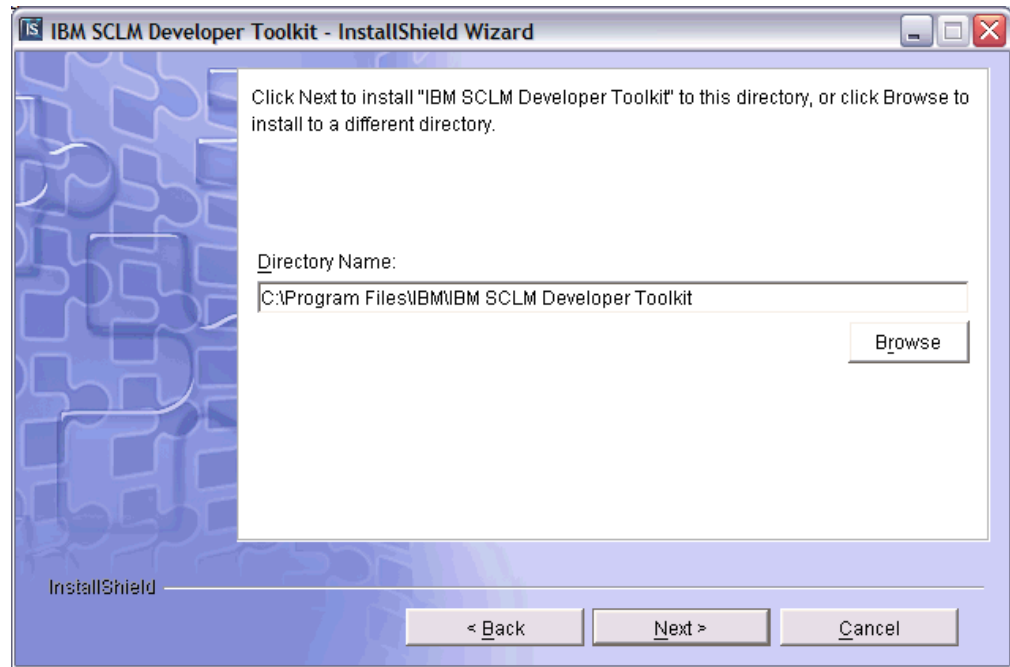


Figure 11. Install Shield Installation Directory Screen (New Eclipse)

- Clicking **Next** will display the setup choice screen (Figure 12 on page 18). Clicking **Typical** will select WebSphere Studio Workbench and the required plug-ins for installation into the prescribed directory.

## Step 8: Download and install the Eclipse-based client on the users PC

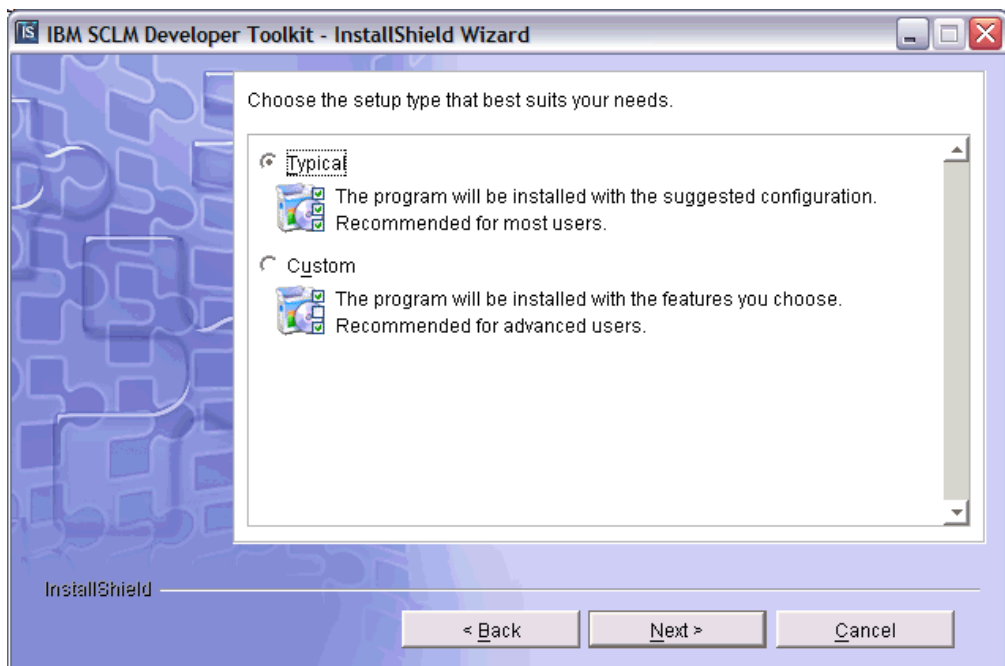


Figure 12. Install Shield setup type Screen (New Eclipse)

- A dialogue, shown in Figure 13, is presented confirming the details of the components to be installed and location.

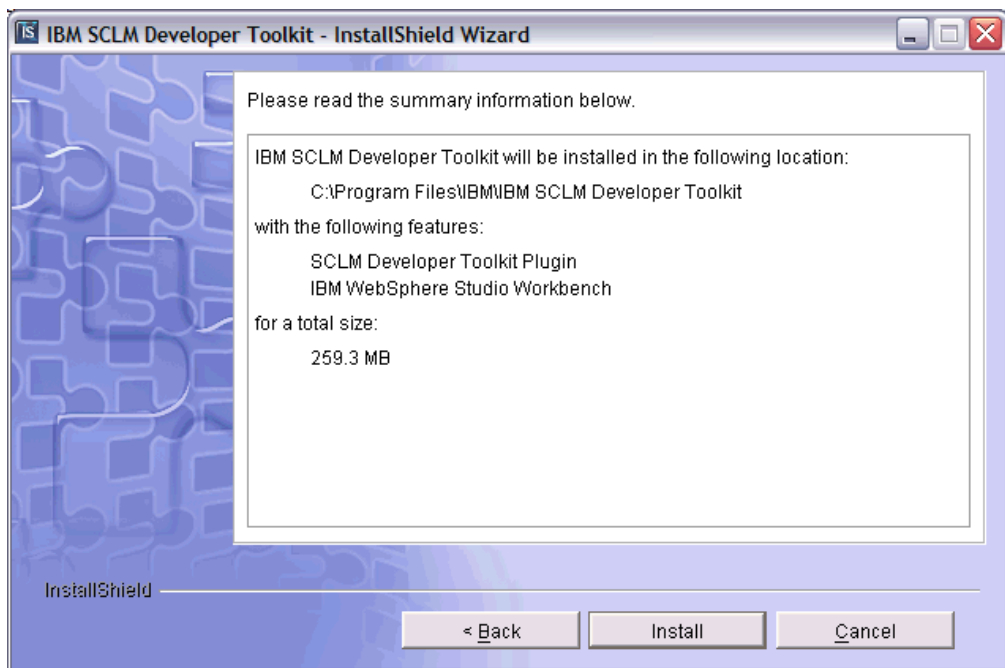


Figure 13. Install Shield Components and Locations Screen (New Eclipse)

- Clicking **Install** will initiate the installation process.
- If the user is installing onto a machine that currently has an Eclipse installed, such as WebSphere Application/Enterprise Developer then the Custom installation should be selected, as you can select the components you wish to install. The location of the installation directory must be provided as detailed in

## Step 8: Download and install the Eclipse-based client on the users PC

Figure 14. This is the location of the existing Eclipse product. Normally the /wstools/ directory is selected as there is an Eclipse directory there that the user should install the plug-ins into. Contact your systems administrator to confirm what the correct location should be, as it may vary between WebSphere versions.

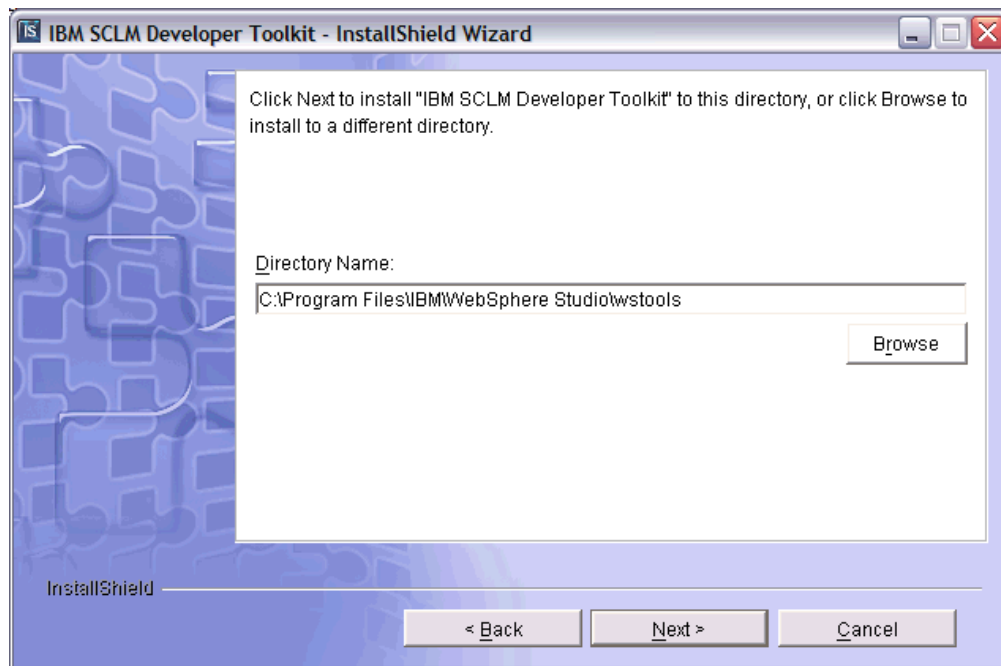


Figure 14. Install Shield Installation Directory Screen (Existing Eclipse)

- Clicking **Next** will display the setup choice screen (Figure 15 on page 20). Clicking **Custom** will allow the user to select which components need to be installed.

## Step 8: Download and install the Eclipse-based client on the users PC

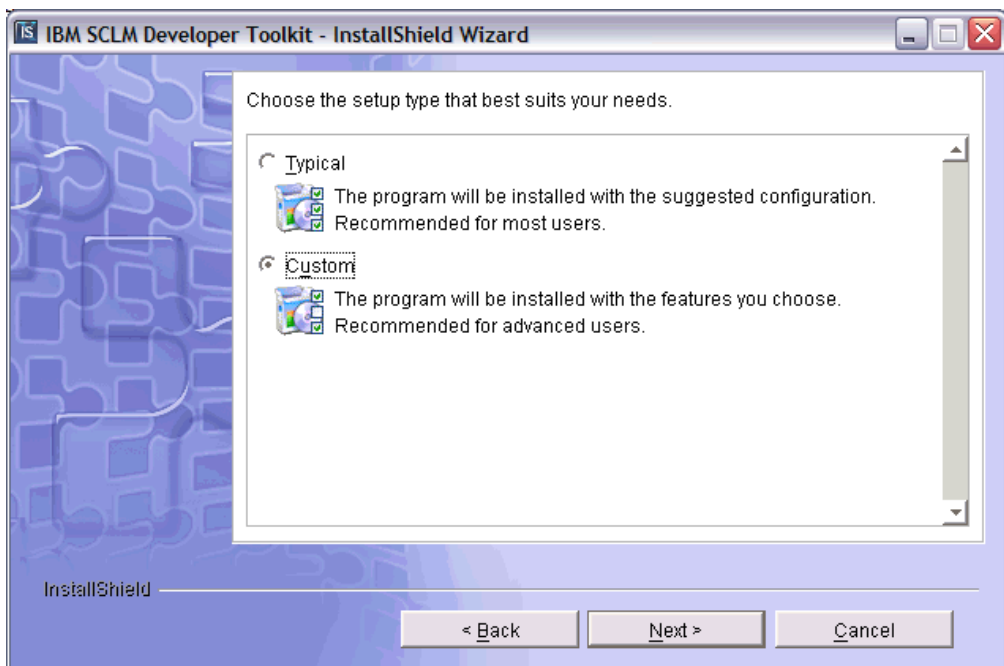


Figure 15. Install Shield setup type Screen (Existing Eclipse)

- As installation is into an existing Eclipse, only the SCLM Developer Toolkit Plug-in is selected.

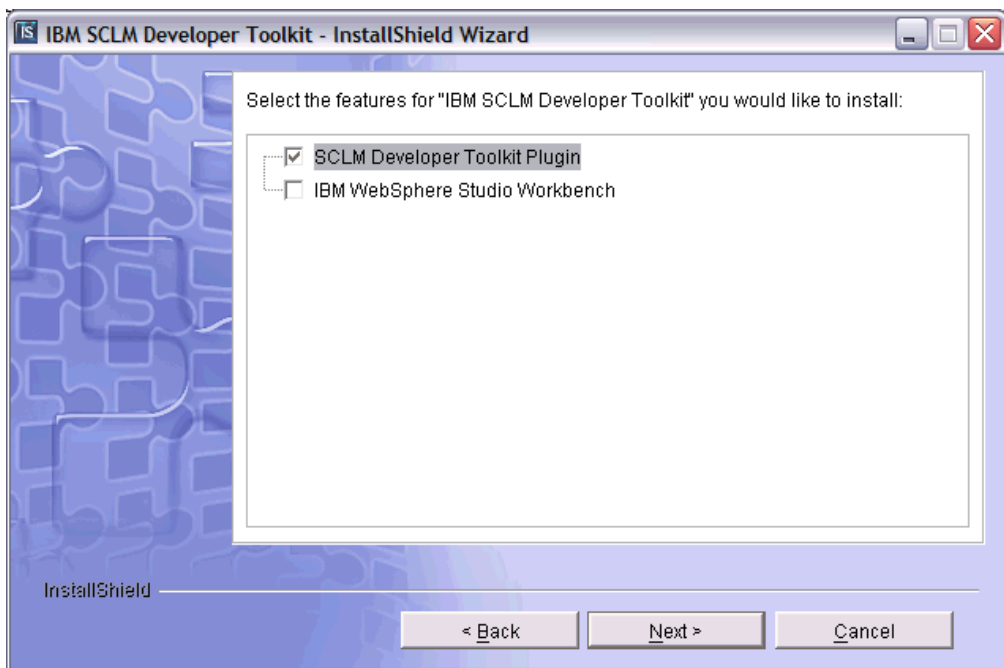


Figure 16. Install Shield Selected Components Screen (Existing Eclipse)

- Check the items to be installed and click **Next**. A dialogue, shown in Figure 17 on page 21 is presented confirming the details of the components to be installed and location.

## Step 8: Download and install the Eclipse-based client on the users PC

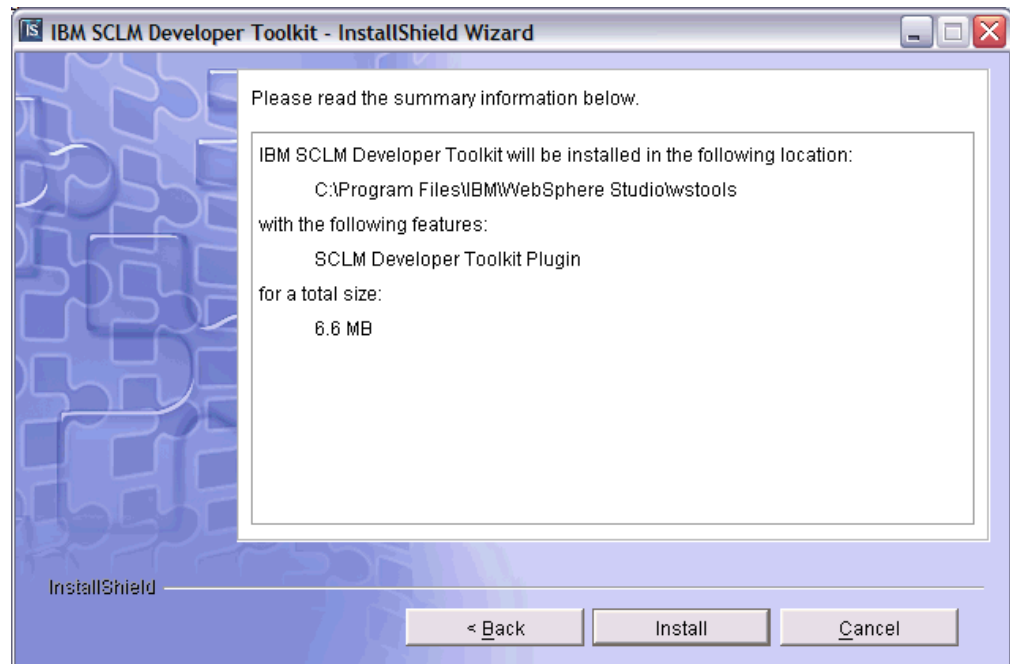


Figure 17. Install Shield Components and Locations Screen (Existing Eclipse)

- Clicking **Install** will initiate the installation process.
- In both the case of installing into an existing Eclipse and creating a new Eclipse installation a conformation screen is shown once installation is complete.

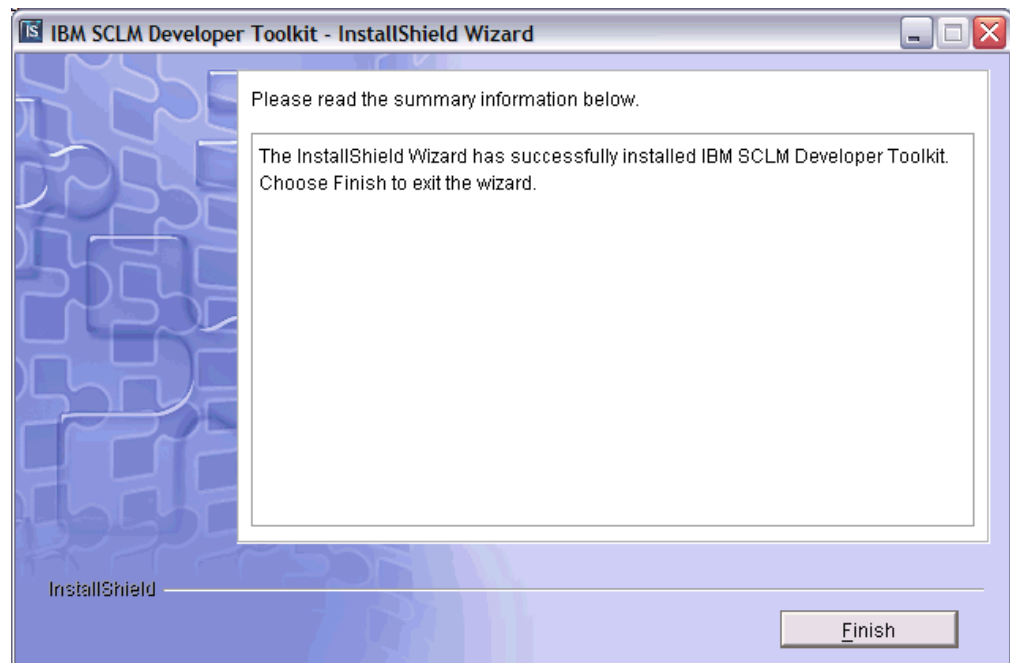


Figure 18. Install Shield Install Summary Screen

If the user has installed a new Eclipse installation, the application is launched by running the `eclipse.exe` file from the installation directory. If the plug-ins have been installed into an existing Eclipse installation then the user should run the Eclipse product as normal.

## Step 8: Download and install the Eclipse-based client on the users PC

In either event, when you run the product for the first time you will be prompted to confirm the installation of the new plug-ins. Confirm this. Eclipse will then request that the application needs to be re-started. Accept this. Once Eclipse has re-started the installation is complete. To confirm the installation of the plug-ins, in the Eclipse IDE go to **Help -> About Eclipse -> Plug-in Details**. This will detail all of the installed plug-ins. There should be entries for IBM SCLM Connector, IBM SCLM Developer Toolkit and IBM SCLM Developer On-line Help.

The product is now installed.

---

## Chapter 2. SCLM customization for the SCLM administrator

---

### Language translators for JAVA/J2EE support

SCLM Developer Toolkit requires four new language translators defined in SCLM for JAVA/J2EE support. These language translators are shipped in the SBWBSAMP members as shown below:

---

Sample Translator	Description
BWBTRANJ	Sample default member translator. No parsing. Similar to SCLM FLM@TEXT.
BWBTRAN1	Sample Java language translator.
BWBTRAN2	Sample Java language translator incorporating ANT (for multiple Java compiles and Jar builds).
BWBTRAN3	Sample J2EE language translator for J2EE support using ANT (supports Jar, WAR, EAR files).

---

*Figure 19. Sample translators*

The SCLM Administrator will need to generate these samples into the PROJDEFS.LOAD library for each SCLM project where Java support is required. These translators are required to be added/compiled in the Project Definition.

A sample Project definition for JAVA/J2EE projects and Host components is provided in sample BWBSCLM.

The LOADLIB dataset containing the BWBXXXXX modules must be included in the ISPF ISPLLIB concatenation to access the JAVA/J2EE language translator modules. The ISPLLIB concatenation is customized in the configuration file ISPF.conf.

#### *SCLM DATASETS for JAVA/J2EE:*

It is recommended to create SCLM target source datasets of RECFM=VB, LRECL=1024 for JAVA/J2EE source being stored in SCLM from the Toolkit client to cater for long record types. The editors on the Eclipse-based client create files of variable record length and to maintain integrity the Host target datasets in SCLM should also be of RECFM=VB. Using Fixed record length datasets (RECFM=FB) will result in imported members having white spaces appended to end of record.

---

### JAVA/J2EE build summary

Here is a summary of the process that occurs for Java and J2EE builds using the supplied translators.

#### **Java build**

- Compilation of all Java Source into output classes.
- Classes stored in SCLM and long/short name stored in Translate tables.

## Java build

- Optional Jar created (contains Classes and may contain other Java project components such as XML/HTML etc in a packaged structure).
- Jar objects stored in SCLM and long/short name stored in Translate table.
- Jar structure determined by the archdef used. The longnames associated with the members in the archdef determine the Jar packaging format.

## J2EE build

- Compilation of all Java Source into output classes.
- Classes stored in SCLM and long/short name stored in Translate tables.
- Optional EJB Jar created (contains Classes and may contain other Java project components such as XML/HTML/JSP etc in a packaged structure).
- Optional web WAR file created based on J2EE web.xml file in J2EE project and stored in SCLM as above.
- Optional EAR file created for deployment based on application.xml in J2EE project and stored in SCLM as above.
- All listing outputs go to J2EELIST.

## SCLM language definitions

The sample translators define the following languages:



---

Translator	Description
J2EEPART	Language type that specifies a JAVA/J2EE component and defined by sample BWBTRANJ. No particular parsing occurs on build of this language type. Non-Java source or J2EE components that require ASCII/EBCDIC language conversion may be generically slotted under this language type if no particular build parsing is required (for example html, xml, definition tables). Optionally language type of TEXT may be used.
J2EEBIN	Language type that specifies JAVA/J2EE Binary or ASCII stored component and defined by sample BWBTRANJ. No particular parsing occurs on build of this language type. JAVA/J2EE binary files and text files that wish to be stored as ASCII may be generically slotted under this language type if no particular build parsing is required.
JAVA	Language type for Java source and defined by sample BWBTRAN1. The Java translator determines what type of build has been issued against Java source. <ul style="list-style-type: none"> <li>Scenario 1: Build issued against individual Java program. The Java translator compiles source into output CLASSES. Class is stored in SCLM. Javac compile output is stored in type JAVALIST. Any classpath dependencies may be satisfied by storing dependent Jars in the classpath directory specified in \$GLOBAL member parameter CLASSPATH_JARS.</li> <li>Scenario 2: Build against ARCHDEF (JAVABLD script which calls ARCHDEF) leaves the ANT script specified to do the build. The Java translator itself, when invoked by the ARCHDEF, just copies the output classes/Jar into SCLM. An antbuild summary file is stored in JAVALIST. Individual Java components have an output table stored in JAVALIST.</li> </ul>
JAVABIN	Language type that is similar as above to Java but is used when storing Java source as ASCII in SCLM.
JAVABLD	Language type that specifies an ARCHDEF generated build.  Generally an ARCHDEF itself is built against, but in the JAVA/J2EE environments a JAVABLD script is built against, which invokes a specified ARCHDEF to be built.  The script of Language Type JAVABLD specifies an ARCHDEF name, ANTXML script to perform bulk builds, and other field tags to facilitate the antxml Build. The Jar created formats the contents exactly as specified in the ARCHDEF structure itself.
J2EEBLD	Language type that is similar as above to JAVABLD but for the full J2EE component structure resulting in additional objects such as WAR and EAR files being created.

**Note:** All objects such as Jar, WAR, and EAR have their internal zipped source parts in ASCII to distribute to all platforms.

---

Figure 20. Sample SCLM language translators

## SCLM types

There are a number of SCLM types that need to be created for JAVA/J2EE support. Some of these types are mandatory types and must be created for JAVA/J2EE support to function.

## ASCII or EBCDIC storage options

---

Type	Description
J2EEBLD	<p>This SCLM Type is required to be setup for both Java and J2EE build processes.</p> <p>The J2EEBLD type contains:</p> <ul style="list-style-type: none"><li>• JAVABLD and J2EEBLD build scripts used to drive the ANT build process.</li><li>• Java and J2EE ANTXML scripts to be invoked for bulk builds.</li></ul> <p><b>Note:</b> Sample Java and J2EE ANTXML scripts are supplied. Generally these scripts require little or no user customization. Site and user dependent variables are customized in the JAVABLD/J2EEBLD scripts themselves to override default ANTXML variables.</p> <p>Contains a \$GLOBAL member which is required for both Java and J2EE builds (see “\$GLOBAL member” on page 28).</p>
ARCHDEF	<p>Contains Java and J2EE archdef members. JAVABLD Jars are built according to the archdef layout.</p> <p>The longname parts in each archdef member outline the JAVA/J2EE project structure. The archdef for a given project may be dynamically created from the client when migrating in new projects or updated when adding new parts.</p> <p>The JAVA/J2EE BUILD functionality differs from normal SCLM HOST component builds in that the archdef is not what is built against but the Build scripts in Type J2EEBLD which reference the archdef. These build scripts overlay project dependent build information and invoke the archdef and the ANT XML script specified.</p>
JAVALIST	<p>This SCLM Type is required to be setup for the Java build process.</p> <p>The JAVALIST type contains listing outputs from JAVABLD builds.</p>
J2EELIST	<p>This SCLM Type is required to be setup for the J2EE build process.</p> <p>The J2EELIST type contains listing outputs from J2EEBLD builds.</p>
JAVACLAS	<p>This SCLM Type is required to be setup for both Java and J2EE build processes.</p> <p>The JAVACLAS type contains output Class files from both JAVABLD and J2EEBLD builds.</p>
JAVAJAR	<p>This SCLM Type is required to be setup for both Java and J2EE build processes.</p> <p>The JAVAJAR type contains Jar output from both JAVABLD and J2EEBLD Jars.</p>
J2EEWAR	<p>This SCLM Type is required to be setup for the J2EE build process.</p> <p>The J2EEWAR type contains WAR output objects from J2EEBLD builds.</p>
J2EEEAR	<p>This SCLM Type is required to be setup for the J2EE build process.</p> <p>The J2EEEAR type contains EAR output objects from J2EEBLD builds.</p>

---

Figure 21. SCLM types

---

## ASCII or EBCDIC storage options

Source files transferred from the SCLM Developer Toolkit plug-in may be stored in SCLM as either ASCII or EBCDIC.

Generally all source in SCLM is stored in EBCDIC to be viewed and edited directly from ISPF/SCLM on z/OS. Users who do not wish to browse or edit code directly from the host may wish to store code directly (that is, as binary transferred) where source will be stored in SCLM using the original client's ASCII/UNICODE codepage. This does have some performance benefits for large projects being stored and imported from SCLM and for JAVA/J2EE builds as an ASCII to EBCDIC translation will not be performed.

SCLM Developer Toolkit determines if a file is binary transferred or if an ASCII to EBCDIC conversion takes place by checking the SCLM language associated with each file/member. Then SCLM Developer Toolkit checks to see if that SCLM Language has an entry in the TRANSLATE.conf file with a TRANLANG keyword.

### ASCII/EBCDIC language translators

---

SCLM Language Translator	Description
JAVA	Java source members stored as EBCDIC. Created by using sample BWBJAVA1.
JAVABIN	Java source members stored as ASCII. Created by using sample BWBJAVA1.
J2EEPART	Any J2EE files where no parsing is required and stored as EBCDIC. Created by using sample BWBJAVAJ.
J2EEBIN	Any J2EE files where no parsing is required and stored as binary or ASCII files. Created by using sample BWBJAVAJ.
TEXT	Default TEXT translator where no parsing is required and stored as EBCDIC. Created by using sample BWBJAVAJ.
BINARY	Default binary language translator where no parsing required. Created by using sample BWBJAVAJ.

---

*Figure 22. SCLM Language Translators and ASCII/EBCDIC*

Default usage is assumed to be ASCII/EBCDIC. This means that files browsed and edited in the Eclipse Plug-in may also be browsed and edited directly on host from ISPF/SCLM.

ASCII usage (binary transferred) is recommended for project migration/import and build performance, as files require no translation. This is only suitable if editing in ISPF/SCLM is not required.

Depending on the SCLM Language Translator used, source can be built in either ASCII or EBCDIC.

For cross platform useability, all deployable files such as Jar, WAR and EAR are built such that all of the contained objects are of type ASCII, regardless of whether any of the source is stored as EBCDIC.

**JAVA/J2EE build note:** If Java source is ASCII stored then the Build script (either language type JAVABLD or J2EEBLD) must specify the ASCII codepage using the ENCODING property variable to correctly compile the Java source.

## ASCII/EBCDIC language translators

### For example:

```
<property name="ENCODING" value="ISO8859-1"/>
```

The ANT script called will use the Javac command with the ENCODING=ISO8859-1 to compile the ASCII source. The default ENCODING codepage is the EBCDIC codepage IBM-1047.

## \$GLOBAL member

As part of the Java/J2EE build process some additional information is required in order to successfully perform the builds. As the builds are performed in z/OS UNIX System Services, information such as the Java product location, ANT product location and the location of the SCLM Developer Toolkit code are required.

For the GUI this information is available in the HTTP server configuration file. However Java/J2EE builds are performed in the standard method used by SCLM to perform its builds, and that is to use SCLM language translators. Therefore these builds can be performed in batch or invoked directly from the ISPF interface, and in both these instances the HTTP server configuration file location is not available.

Additionally it may be required to use different versions of ANT or Java for different SCLM development groups, so to this end the \$GLOBAL member can be group specific.

A sample member BWBGL0B is provided in the SBWBSAMP library. This sample member needs to be copied into SCLM type J2EEBLD in the SCLM hierarchy as member \$GLOBAL and saved with a valid non parsing language, such as TEXT (as provided in language translator FLM@TEXT in the SISPMACS library).

The \$GLOBAL member currently makes available the following information to the Java/J2EE build processes:

Table 5. \$GLOBAL variables

Variable	Description
ANT_BIN	HFS directory path of ANT runtime  <b>Example:</b> <pre>&lt;property name="ANT_BIN" value="/u/antdirectory/ANT/apache-ant-1.6.0/bin/ant"/&gt;</pre>
JAVA_BIN	HFS directory path of Java compile/runtime  <b>Example:</b> <pre>&lt;property name="JAVA_BIN" value="/u/javadiirectory/IBM/J1.3/bin"/&gt;</pre>
HOMEDIR	The install home directory for the SCLM Developer Toolkit WORKAREA  <b>Example:</b> <pre>&lt;property name="HOMEDIR" value="/var/SCLMDT"/&gt;</pre>
CLASSPATH_JARS	z/OS HFS classpath directory used for JAVA compiles. All jars located in this directory will be used in the classpath.  <b>Example:</b> <pre>&lt;property name="CLASSPATH_JARS" value="/var/SCLMDT/CLASSPATH"/&gt;</pre>

Table 5. \$GLOBAL variables (continued)

Variable	Description
TRANTABLE	VSAM file containing the long/short name translations  <b>Example:</b> <code>&lt;property name="TRANTABLE" value="SCLMDT.LSTRANS.FILE"/&gt;</code>

If the above variables are to be set for the all group levels in the SCLM project then it is good practice to create a single \$GLOBAL member at the highest level in the hierarchy. When the Java/J2EE build translator runs it will look up the hierarchy from the group level performing the build and use the first \$GLOBAL it finds in the J2EEBLD type.

**Note:** The \$GLOBAL member must be stored as a valid saved SCLM member so this hierarchy lookup can be performed.

If different settings are required, at different development groups for example, then a \$GLOBAL member can be created in each of the development groups. This may be useful if a build was required at Java 1.3 level as well as Java 1.4 level in order to test code at different Java levels.

## SITE and project-specific options

A facility has been provided to allow certain settings to be made at a SITE installation level or at a specific SCLM project level. The options that can currently be configured are:

- Mandatory Change Code entry
- Deactivation of foreground Builds and Promotes
- Specification of package approval system. Currently IBM Breeze for SCLM is the supported approval system.
- Definition of Batch Build, Promote and Migrate job cards

All or none of these options can be set. If they are not set they will be defaulted in the programs. Some of these options can be set in the SITE file while others can be set at an SCLM Project specific level. Alternatively there can be no SITE specific file and options can be set at an SCLM Project level only. For job cards the user can override the job card information by using their own specified job card entered through the IDE.

This facility is activated by creating certain files in the HFS under the /var/SCLMDT/CONFIG/PROJECT directory, or whatever you called this directory at installation time. This directory is created at project initialization time by running job BWBINST1.

If you wish to set SITE specific values then you need to create a file called SITE.conf in the /PROJECT directory. A sample SITE config file is provided in the SBWBSAMP library in member BWBSITE. Copy this member to a file named SITE.conf in this directory and tailor the values accordingly. The following figure shows the sample SITE configuration file.

## SITE and project-specific options

---

```
*
* ----- SITE SPECIFIC OPTIONS -----
*
* Below are a number of site specific options used to
* determine the behaviour of the Eclipse front-end.
* These can be overridden by creating a project specific
* options file for the SCLM project that overrides some
* or all of these options.
*
* SCM Approver processing applies to this project?
BUILDAPPROVER=NONE
PROMOTEAPPROVER=NONE
*
* Change Code entry on check-in is mandatory?
CCODE=N
*
* Foreground or On-line builds/promotes allowed for this project?
FOREGROUNDBUILD=Y
FOREGROUNDPROMOTE=Y
*
* Batch Build default jobcard
BATCHBUILD1=//SCLMBILD JOB (#ACCT),'SCLM BUILD',CLASS=A,MSGCLASS=X,NOTIFY=&SYSUID
BATCHBUILD2=//*
BATCHBUILD3=//*
BATCHBUILD4=//*
*
* Batch Promote default jobcard
BATCHPROMOTE1=//SCLMPROM JOB (#ACCT),'SCLM PROMOTE',CLASS=A,MSGCLASS=X,NOTIFY=&SYSUID
BATCHPROMOTE2=//*
BATCHPROMOTE3=//*
BATCHPROMOTE4=//*
*
* Batch Migrate default jobcard
BATCHMIGRATE1=//SCLMMIGR JOB (#ACCT),'SCLM MIGRATE',CLASS=A,MSGCLASS=X,NOTIFY=&SYSUID
BATCHMIGRATE2=//*
BATCHMIGRATE3=//*
BATCHMIGRATE4=//*
```

---

*Figure 23. Sample SITE specific SCLM project setting*

It is also possible to have project specific configuration settings that are used to configure a single SCLM project. These will override the SITE specific values if a `SITE.conf` exists. If you wish to set Project specific values then you need to create a file called `project.conf` in the `/PROJECT` directory, where `project` is the SCLM Project name. A sample Project config file is provided in the `SBWBSAMP` library in member `BWBPROJ`. Copy this member to a file named `project.conf` in the `/PROJECT` directory and tailor the values accordingly. The following figure shows the sample Project configuration file.

```

*
* ----- PROJECT SPECIFIC OPTIONS -----
*
* Below are a number of project specific options used to
* determine the behaviour of the Eclipse front-end.
*
* These will override the SITE.CONF file
*
*
* SCM Approver processing applies to this project?
BUILDAPPROVER=BREEZE
PROMOTEAPPROVER=BREEZE
*
* Change Code entry on check-in is mandatory?
CCODE=Y
*
* Foreground or On-line builds/promotes allowed for this project?
FOREGROUNDBUILD=N
FOREGROUNDPROMOTE=N
*
* Batch Build default jobcard
BATCHBUILD1=//SCLMBILD JOB (#ACCT),'SCLM BUILD',CLASS=A,MSGCLASS=X,NOTIFY=&SYSUID,
BATCHBUILD2=// MSGLEVEL=(1,1)
BATCHBUILD3=//*
BATCHBUILD4=//*
*
* Batch Promote default jobcard
BATCHPROMOTE1=//SCLMPROM JOB (#ACCT),'SCLM PROMOTE',CLASS=A,MSGCLASS=X,
BATCHPROMOTE2=// MSGLEVEL=(1,1),NOTIFY=&SYSUID
BATCHPROMOTE3=//*
BATCHPROMOTE4=//*

```

Figure 24. Sample PROJECT specific SCLM project setting

## Options Definition

All of the options are optional. They will be set to the default values by the product. If any of the options are specified in the SITE.conf or the project.conf then they will be used.

Table 6. SITE/Project options

BUILDAPPROVER=approval product/ <u>NONE</u>	Specify the name of the approval product used for the build process. Currently the only supported product is Breeze for SCLM. Default is NONE.
PROMOTEAPPROVER=approval product/ <u>NONE</u>	Specify the name of the approval product used for the promote process. Currently the only supported product is Breeze for SCLM. If the PROMOTEAPPROVER is set to BREEZE then the Breeze specific fields will be displayed during a promote. Default is NONE.
CCODE= <u>N</u> /Y	Specify Y to make change code entry on check-in a mandatory field. Default is N such that Change Code entry is not mandatory.
FOREGROUNDBUILD= <u>Y</u> /N	Specify N to restrict foreground builds. Default is Y such that foreground builds are allowed.

## Options Definition

Table 6. SITE/Project options (continued)

<p>FOREGROUND_PROMOTE=Y/N</p>	<p>Specify N to restrict foreground promotes. Default is Y such that foreground promotes are allowed.</p>
<p>BATCHBUILD1=Job card 1          BATCHBUILD2=Job Card 2          BATCHBUILD3=Job Card 3          BATCHBUILD4=Job Card 4</p>	<p>Set a default batch job card for the build process. Different projects may use different account codes or Job class so the option of specifying project specific job cards allows for this scenario.</p>
<p>BATCHPROMOTE1=Job card 1          BATCHPROMOTE1=Job card 2          BATCHPROMOTE1=Job card 3          BATCHPROMOTE1=Job card 4</p>	<p>Set a default batch job for the Promote process. Different projects may use different account codes or Job class so the option of specifying project specific job cards allows for this scenario.</p>
<p>BATCHMIGRATE1=Job card 1          BATCHMIGRATE1=Job card 2          BATCHMIGRATE1=Job card 3          BATCHMIGRATE1=Job card 4</p>	<p>Set a default batch job for the Migrate process. Different projects may use different account codes or Job class so the option of specifying project specific job cards allows for this scenario.</p>



---

## Chapter 3. CRON-initiated Builds and Promotes

Though most Builds and Promotes will be initiated via the Developer Toolkit client, there is a provision to set up Build and Promote configuration files within the z/OS HFS and to initiate these builds or promotes via the CRON (time) service within UNIX System Services. Using this method the DT Client is not required, as the relevant Build and Promote parameters are read from a HFS configuration file and passed to the DT Host component for SCLM processing.

Below is a description of the SCLM Developer Toolkit samples that provide CRON initiated Builds and Promotes. These samples are available in the installed Developer Toolkit SBWBSAMP dataset.

---

### Sample member Description

<b>BWBCRON1</b>	<p>This REXX sample calls the SCLM Developer Toolkit host interface and passes the function parameters. Output from the function process by default is displayed to STDOUT but may be re-directed to a HFS file or log.</p> <p>This sample may be copied into the HFS into a directory path of the users choice to run. The sample will need to be customized as detailed within the sample.</p> <p>This REXX sample must be run in conjunction with input from sample BWBCRONB for a build or sample BWBCRONP for a promote.</p>
<b>BWBCRONB</b>	<p>This REXX sample sets up the Build parameter input string which will be passed to module BWBCRON1.</p> <p>The sample requires user customization to update all required build parameters.</p> <p>This sample must be copied into a user determined HFS directory (optionally renamed) to be run with sample BWBCRON1.</p>
<b>BWBCRONP</b>	<p>This REXX sample sets up the Promote parameter input string which will be passed to module BWBCRON1.</p> <p>The sample requires user customization to update all required promote parameters.</p> <p>This sample must be copied into a user determined HFS directory (optionally renamed) to be run with sample BWBCRON1.</p>

---

*Figure 25. Sample CRON members*

---

## STEPLIB and PATH requirements

The PATH and STEPLIB variables in either the system wide profile (/etc/profile) or the users profile (/u/userid/.profile) will need to be set to locate the cron jobs (\$PATH) and locate the SCLM Developer Toolkit modules (\$STEPLIB) if the DT dataset is not in the LINKLIST.

### Example:

## STEPLIB and PATH requirements

The samples BWBCRON1 and BWBCRONB are copied to a test directory /var/SCLMDT/CRONJOBS. The following HFS PATH and STEPLIB variables are set in /etc/profile:

```
PATH=/var/SCLMDT/CRONJOBS:$PATH
STEPLIB=BWB.V1R1M0.SWBLOAD:$STEPLIB
```

## CRON Build job execution

Once the CRON jobs are added to the PATH variable they can be run by piping the output from the parameter\_exec into the processing\_exec. The output can then be directed to an output log file.

### Syntax

```
parameter_exec | processing_exec > output.log
```

The “|” is the z/OS UNIX System Services pipe symbol.

### Invocation Example:

Using the sample names as provided the CRON build exec could be invoked as follows:

```
BWBCRONB | BWBCRON1 >bwbcronb.log
```

Additionally the above sample Build execution could be added to a CRONTAB file to run at 7.30pm Monday- Friday:

```
30 19 * * 1-5 BWBCRONB|BWBCRON1 >bwbcronb.log ;
```

For further information on the CRON services available and the CRONTAB format refer to the following manuals:

- z/OS UNIX System Services Command Reference
- z/OS UNIX System Services Planning

Alternatively use the online manual help (man) under z/OS UNIX System Services:

- man cron
- man crontab
- man at

## CRON Build job samples

Below are the BWBCRON1 and BWBCRONB job samples as provided in the SBWBSAMP library.

---

```
/* REXX */
/* Customize STEPLIB and CGI_VCPATH BELOW */
/*
The STEPLIB should reflect the install load library for SCLM Developer
toolkit.
If this dataset resides in the LINKLIST then set STEPLIB to '' .
*/
STEPLIB = 'BWB.V1R1M0.SWBLOAD'
/*
The Environment variable CGI_VCPATH determines the HOME directory
path where the configuration files reside for SCLM Developer Toolkit.
This was determined by the install directory specified in install
job BWBINST1. By default /var/SCLMDT .
*/
CGI_VCPATH = '/var/SCLMDT'
/* */
/* SAMPLE USEAGE */
/*
COMMAND : BWBCRONB|BWBCRON1 >BWBCRONB.log
(passes build parameter list to BWBCRON1 & outputs to BWBCRONB.log)
*/
/* DO NOT ALTER BELOW */
CALL ENVIRONMENT 'STEPLIB',STEPLIB
CALL ENVIRONMENT 'CGI_VCPATH',CGI_VCPATH
CALL BWBINT
EXIT
```

---

Figure 26. Sample CRON Build Exec

---

```

/* REXX */
/* SAMPLE BUILD PARAMETER FILE USED FOR CRON INITIATED BUILDS */
/* Update Build parameters below */
/* if parameter required as Blank then set as '' */
FUNCTION = 'BUILD'
PROJECT = 'PROJ1' /* SCLM Project */
PROJDEF = '' /* Alt proj definition */
TYPE = 'SOURCE' /* SCLM Type */
MEMBER = 'TESTMEM' /* SCLM Member name */
GROUP = 'DEV1' /* SCLM Group */
GROUPBLD = '' /* Build at Group */
REPDGRP = 'DEV1' /* Users Development group */
BLDREPT = 'Y' /* Generate Build report */
BLDLIST = 'Y' /* Generate List on error */
BLDMSG = 'Y' /* Generate Build Messages */
BLDScope = 'N' /* Build Scope E/L/N/S */
BLDMODE = 'C' /* Build Mode C/F/R/U */
BLDMSGDS = '' /* Message dataset */
BLDRPTDS = '' /* Report dataset */
BLDLSTDS = '' /* list dataset */
BLDEXTDS = '' /* Exit dataset */
SUBMIT = 'BATCH' /* Online or Batch */
/* DO NOT ALTER PARM BUILD VARIABLE BELOW */
PARM1 = 'SCLMFUNC=' FUNCTION '&PROJECT=' PROJECT '&PROJDEF=' PROJDEF ||,
'&TYPE=' TYPE '&MEMBER=' MEMBER '&GROUP=' GROUP '&GROUPBLD=' GROUPBLD ||,
'&REPDGRP=' REPDGRP '&BLDREPT=' BLDREPT '&BLDLIST=' BLDLIST ||,
'&BLDMSG=' BLDMSG '&BLDScope=' BLDScope '&BLDMODE=' BLDMODE ||,
'&BLDMSGDS=' BLDMSGDS '&BLDRPTDS=' BLDRPTDS '&BLDLSTDS=' BLDLSTDS ||,
'&BLDEXTDS=' BLDEXTDS '&SUBMIT=' SUBMIT
/* outputs parameter string as input to BWBCRON1 */
SAY PARM1

```

---

Figure 27. Sample Build parameter file

---

## Appendix A. Long/short name translation table

Currently core SCLM does not support the use of code storage with file (member) names greater than eight characters.

Code such as Java and other PC client code inherently have much greater name lengths and even incorporate path information (packaging) as part of the name. This causes the need for code with named parts greater than eight characters to go through a long/short name conversion utility to enable these parts to be stored within SCLM with an eight character (or less) name length.

A longname to shortname translation table stores the matching longnames (real name) against the short names (as stored in SCLM). These tables are controlled and accessed by SCLM and reside in a VSAM dataset. This functionality has been introduced into SCLM with the PTF that addresses APAR OA11426 for z/OS V1.4 and later.

The conversion algorithm follows these steps:

1. The translate prefix consists of the first two characters (uppercase) of the long program/file name (that is, the last file name after “/” character in multi-packaging format). If the first two characters are not valid as a prefix for a host member name (because they contain invalid special characters) then the prefix is “XX”. Special cases, such as a single character alphabetic name (/u/test/A or /u/test/A.java), are also assigned the prefix of “XX”.
2. The last six characters are numerically assigned the next numeric sequential number available in the translate table.

**For example:**

Longname	Shortname in SCLM PDS or PDSE
com/ibm/workbench/testprogram.java	TE000001
source/plugins/Phantom/.classpath	XX000001

---

## Technical summary of the SCLM Translate program

SCLM program FLMLSTRN was created to read and update the VSAM translation table. SCLM Developer Toolkit uses this program to read and update correlating longnames and shortnames.

The VSAM file used to store the translation table is a variable length KSDS with an alternative index and path defined. A sample job is provided in SCLM to allocate this VSAM file.

The internal structure of the VSAM cluster is:

```
1 ls_record,  
  3 ls_short_name char(08),  
  3 ls_lngname_key char(50),  
  3 ls_long_name char(1024);
```

Sample JCL to allocate the Long/Short name translation VSAM file can be seen in “Step 5: Configure long/short name table VSAM file” on page 7.

## Technical summary of the SCLM Translate program

**Note:** The following technical information on SCLM Translate table function calls is supplied as information only and is not required to enable any SCLM Developer Toolkit functionality.

The program FLMLSTRN is invoked via the ISPF SELECT service passing one of the parameters listed in Table 7.

### Syntax

```
"SELECT PGM(FLMLSTRN) PARM(keyword)"
```

### Invocation example:

```
"SELECT PGM(FLMLSTRN) PARM(TRANSLATE)"
```

Table 7. Long/Short name translation parameters

Keyword Record	Processing	Description
FINDLONG	Single	Find a long name for a given short name
FINDSHORT	Single	Find a short name for a given longname
TRANSLATE	Single	Find a short name if it exists or allocate a new short name if it does not exist
MIGRATE	Multiple	Search for multiple longnames
IMPORT	Multiple	Search for multiple shortnames

---

## Single long/short name record processing

### FINDLONG Processing

- The VSAM cluster allocated to DD LSTRANS is opened in read mode.
- The short name is retrieved from the ISPF variable FLMLSSHR and this short name is used to read the VSAM file.
- If the record is not found a message is returned via the ISPF variable FLMLSERR stating long name was not found.
- If the long name was found it is returned in the ISPF variable FLMLSLNG.
- The VSAM cluster is closed.

### FINDSHORT Processing

- The VSAM Path allocated to DD LSTRNPTH is opened in read mode.
- The long name is retrieved from the ISPF variable FLMLSLNG.
- The last 50 bytes of the long name is used to read the path.
- If a record is not returned a message is returned via the ISPF variable FLMLSERR stating short name was not found.
- If a record is returned the long name in the VSAM record is checked against the long name in the ISPF variable FLMLSLNG.
- If it doesn't match the VSAM records are read and compared until the ls\_lngname\_key doesn't match or the long name is found.

**Note:** The ls\_lngname\_key allows duplicates as it is possible to have a VSAM record with the same ls\_lngname\_key but different long name.

- If the short name was found it is returned in the ISPF variable FLMLSSHR.
- The VSAM path is closed.

## TRANSLATE Processing

The processing is the same as for FINDSHORT.

- If the short name is found no further processing is performed.
- If the short name is not found the VSAM cluster allocated to DD LSTRANS is opened in update mode.
- The file name is determined by finding the last '/' or '\ ' in the long name.
- The first 2 bytes of the file name are used to look up the VSAM file prefix record which contains a number.
- The file prefix and number will be used to generate the short name (for example, PR000123).
- The short name generated (PR000123) is used to check VSAM file to determine if the short name is being used.
- If it is the prefix number is incremented and short name again checked.
- This process continues until we find a short name that is not being used.
- The prefix record is updated and then the new translate record is added.
- The short name is returned in the ISPF variable FLMLSSHR.
- The VSAM cluster is closed.

---

## Multiple long/short name record processing

MIGRATE and IMPORT are functions that were introduced to improve performance with large numbers of longnames being translated (MIGRATE) or large numbers of shortnames being searched for (IMPORT).

Both functions, "MIGRATE" and "IMPORT", read a variable blocked sequential file with LRECL=1036 which is allocated as DD LSTRNPRC.

Before invocation this file will contain the shortnames or longnames depending on the function called and in the correct format and column.

After invocation LSTRNPRC will contain both the shortname and correlating longname.

The format of the file is:

```
1 pr_record,
  3 pr_short_name char(08),
  3 pr_long_name char(1024);
```

## IMPORT processing

- The VSAM cluster allocated to DD LSTRANS is opened in read mode and the processing file allocated to DD LSTRNPRC is opened for update.
- For each of the records on the processing file, the short name is used to read the VSAM translation file. If a record is found the processing file is updated with the long name.
- The VSAM cluster/processing files are closed.

## MIGRATE processing

- The VSAM cluster allocated to DD LSTRANS is opened in read mode and the processing file allocated to DD LSTRNPRC is opened for update.
- For each of the records on the processing file, the long name is used to read the VSAM file. If a record is found the processing file record is updated with its

## MIGRATE processing

corresponding short name otherwise LSTRANS is opened in update mode to add new long name/short name entries and the new shortname generated is written back to the LSTRNPRC file.

- The VSAM cluster/processing files are closed.

Here is some sample REXX to invoke the long/short name translation process:

---

```
/* REXX *****/
/* Sample to translate longname to a shortname */
/*****/
Address TSO
"FREE FI(LSTRANS)"
"FREE FI(LSTRNPTH)"
"ALLOC DD(LSTRANS) DA('SCLMDT.LSTRANS.FILE') SHR REUSE"
"ALLOC DD(LSTRNPTH) DA('SCLMDT.LSTRANS.FILE.PATH') SHR REUSE"
/* Create shortname for longname com/ibm/phantom.txt */
FLMLSLNG = "com/ibm/phantom.txt"
Address ISPEXEC "VPUT (FLMLSLNG) PROFILE"
Address ISPEXEC "SELECT PGM(FLMLSTRN) PARM(TRANSLATE)"
LSRC=RC
If LSRC > 0 Then
Do
    Address ISPEXEC "VGET (FLMLSERR,FLMLSER1) PROFILE"
    Say "LS ERROR LINE 1 ==>" FLMLSERR
    Say "LS ERROR LINE 2 ==>" FLMLSER1
    Return
End
Else
Do
    Address ISPEXEC "VGET (FLMLSSHR,FLMLSLNG) PROFILE"
    Say " Shortname = " FLMLSSHR
    Say " Longname = " FLMLSLNG
End
Address TSO
"FREE FI(LSTRANS)"
"FREE FI(LSTRNPTH)"
```

---

Figure 28. Sample REXX for Translate module invocation



---

## Appendix B. Messages and codes

---

**BWB00001**    **ERROR in Allocation/Write to : *data set name***

**Explanation:** An attempt to write the client parameter input to a temporary dataset has failed.

**User Response:** Review the operations log to further determine any errors.

---

**BWB00002**    **Processing terminates**

**Explanation:** The requested function is cancelled and the ISPF/SCLM session is ended.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00003**    **Following function has failed : *function***

**Explanation:** Indicated the failing Function or operation request.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00004**    **ISPF initialization has failed**

**Explanation:** The ISPF/SCLM session has failed to initialize. Processing on that function request is terminated.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00005**    **Review your ISPF properties and Loadlib**

**Explanation:** Additional error messaging to indicate a reason for ISPF/SCLM initialization failure.

**User Response:** The Systems programmer should review the ISPF.conf configuration file in the HFS CONFIG directory to determine the correct ISPF dataset allocations have been set.

---

**BWB00006**    **Ensure the Loadlib data set is APF authorized**

**Explanation:** The SCLM Developer Toolkit Loadlib dataset may not be APF authorized resulting in ISPF/SCLM initialization failure.

**User Response:** The Systems programmer should ensure the Loadlib is APF authorized or that no non-APF authorized datasets have been included in the HTTP server STEPLIB.

---

**BWB00007**    **ISPF or SCLM service has abended**

**Explanation:** An ISPF/SCLM internal error has caused the session to terminate. The function request is cancelled.

**User Response:** Review the operations log to further determine any errors.

---

**BWB00008**    **Review Log for error details**

**Explanation:** Review the Client operations log for further messages or error analysis.

**User Response:** To review the operations log, right click and select TEAM then operations log.

---

**BWB00009**    **Error reading ISPF.conf**

**Explanation:** The configuration file ISPF.conf located in the z/OS HFS at installdirectory/ISPF.conf could not be read

**User Response:** The Systems Programmer should ensure the configuration file exists and the user has read access.

---

**BWB00010**    **Ensure file exists in directory specified by environment variable CGI\_VCMPATH set in the server configuration**

**Explanation:** Configuration files such as ISPF.conf should be located in the directory specified by CGI\_VCMPATH

**User Response:** The Systems Programmer should check CGI\_VCMPATH in httpd.env.

---

**BWB00011**    **If error on ISPSPROF table then a background session may already be using the profile data set : *data set name***

**Explanation:** Two concurrent sessions have been initiated and using the same ISPF profile dataset.

**User Response:** Check that another session is not running concurrently and preventing this session to establish.

---

**BWB00012**    **Error in ISPF data set allocation : See error message below**

**Explanation:** An error in one of the ISPF dataset allocations. Specific allocation error messages follow.

**User Response:** The Systems Programmer should

## Messages and codes

check ISPF.conf to ensure valid ISPF DD names and correct ISPF datasets.

---

**BWB00013**    **Error in allocating the following DD and data set names : *error message***

**Explanation:** The following dataset could not be allocated to that DD name.

**User Response:** The Systems Programmer should review the DD and dataset allocation (ISPF.conf).

---

**BWB00014**    **Check ISPF configuration file ISPF.conf on the host is correct**

**Explanation:** An error in the ISPF dataset allocations has occurred.

**User Response:** The Systems Programmer should check ISPF.conf to ensure valid ISPF DD names and correct ISPF datasets.

---

**BWB00015**    **\*\*\* Edit cancelled \*\*\***

**Explanation:** EDIT processing has been cancelled due to an error.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00016**    **Selected group not in development group hierarchy**

**Explanation:** The group selected is not valid as it does not reside in the USERS development hierarchy.

**User Response:** Choose a valid group or operate from a different development group.

---

**BWB00017**    **Unable to locate data set for : *project group type***

**Explanation:** An error has occurred in locating a valid dataset for that particular project/group/type.

**User Response:** The SCLM administrator should check that a valid dataset exists for that project/group/type.

---

**BWB00018**    **\*\*\* Edit/Browse cancelled \*\*\***

**Explanation:** An error has occurred in EDIT/BROWSE and the function is cancelled.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00019**    **Member selected resides in lower hierarchy group**

**Explanation:** Selected member is not valid for operation as a valid member resides in a lower hierarchy group.

**User Response:** Select member from lower hierarchy group.

---

**BWB00020**    **Member should be selected for from group : *group***

**Explanation:** Additional messaging indicating which member should be selected for this operation.

**User Response:** Select recommended member and repeat function.

---

**BWB00021**    **Repository view mismatch**

**Explanation:** The USERS repository view and SCLM are not synchronized.

**User Response:** Re-populate project to synchronize the view with SCLM.

---

**BWB00022**    **Re-filter using Populate SCLM Project View or re-synchronize IDE view**

**Explanation:** The repository view or IDE view are not synchronized with SCLM.

**User Response:** Re-populate project if explorer mode or developer mode are not synchronized. Otherwise re-synchronize IDE view.

---

**BWB00023**    **\*\*\* Add new member function cancelled \*\*\***

**Explanation:** The Add new member function has been cancelled due to errors.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00024**    **Member does not reside in user's development group**

**Explanation:** An invalid SCLM operation has occurred as the member does not reside in the user's development group.

**User Response:** Select a valid member.

---

**BWB00025**    **\*\*\* No member to Browse \*\*\***

**Explanation:** A valid SCLM member with text was not found.

**User Response:** None

---

**BWB00026**    **\*\*\* Member copy into HFS failed \*\*\***

**Explanation:** The operation involves copying the member to the z/OS HFS. This operation failed.

**User Response:** The Systems programmer should review the operations log for further explanation of this error.

---

**BWB00027**    **Edit failed - copy failure : data set name(member) to data set name**

**Explanation:** As part of the EDIT function a copy of the SCLM member to a temporary dataset has failed.

**User Response:** Review additional error messages and the operations log for further information.

---

**BWB00028**    **Error returned on member lock**

**Explanation:** SCLM lock on member for edit failed. Member may already be locked for edit by another user.

**User Response:** Issue an SCLM status to determine if member is locked for EDIT by another user.

---

**BWB00029**    **Binary formatted members not valid for Edit**

**Explanation:** Binary object type members of NON-EDIT are not eligible to be selected for EDIT. Function cancelled.

**User Response:** None

---

**BWB00030**    **\*\*\* Copy to HFS failed \*\*\***

**Explanation:** The operation involves copying the member to the z/OS HFS. This operation failed.

**User Response:** The Systems programmer should review the operations log for further explanation of this error.

---

**BWB00031**    **\*\*\* Error in ASCII/EBCDIC translation \*\*\***

**Explanation:** An error has occurred in the translation from ASCII to EBCDIC when checking in a file.

**User Response:** Ensure the file to be checked in is not empty or contains invalid special characters. Otherwise the ASCII EBCDIC codepages used should be verified.

---

**BWB00032**    **\*\*\* Error in member copy to SCLM \*\*\***

**Explanation:** The member being checked in wasn't successfully copied into the MVS™ dataset. The operation has failed.

**User Response:** The Systems programmer should review the operations log for further explanation of this error.

---

**BWB00033**    **\*\*\* Save function failed \*\*\***

**Explanation:** The SAVE function has failed.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00034**    **\*\*\* Save function cancelled \*\*\***

**Explanation:** The check-in function to SCLM was cancelled.

**User Response:** Review additional error messages and the operations log to determine reason.

---

**BWB00035**    **Member not previously locked for Edit**

**Explanation:** Associated with the SAVE / CHECK-IN function where a member has to be SCLM locked or checked out first.

**User Response:** The USER should lock or check-out the member first using the EDIT function.

---

**BWB00036**    **Error returned from ACCTINFO status on member**

**Explanation:** The requested function internally performs an SCLM ACCTINFO request which has failed.

**User Response:** Review additional error messages and the operations log to determine error.

Check the validity of the member.

---

**BWB00037**    **\*\*\* Save function successful \*\*\***

**Explanation:** The SAVE or Check-in operation was successful.

**User Response:** Smile

---

**BWB00038**    **Error returned on SAVE for :**

**MEMBER** = *member*  
**PROJECT** = *project*  
**GROUP** = *group*  
**TYPE** = *type*

**User Response:** Lists member details for the failed SAVE request.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00039**    **Delete successful for member : member**

**Explanation:** The selected member was deleted successfully.

**User Response:** None

---

**BWB00040**    **Delete failed for member : member**

**Explanation:** Delete function failed for requested member.

**User Response:** Review additional error messages and the operations log to determine error.

## Messages and codes

---

**BWB00041 Error returned on delete**

**Explanation:** The SCLM delete command has returned a non-zero return code.

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00042 Please check log file for information messages**

**Explanation:** Additional messaging may be contained in the operations log.

**User Response:** To review the operations log, right click and select TEAM then operations log.

---

**BWB00043 Unlock failed for member : *member***

**Explanation:** The SCLM unlock command on a cancel EDIT request has failed.

**User Response:** Review the SCLM status of the member.

---

**BWB00044 Unlock successful for member : *member***

**Explanation:** A member previously locked for EDIT has been successfully unlocked.

**User Response:** None

---

**BWB00045 Failed allocation of build parms DSN : *data set name***

**Explanation:** The temporary dataset USERID.TEMP.VCMISPF containing the build parameters could not be allocated as DISP=SHR. Processing terminates.

**User Response:** The Systems programmer should review the operations log for additional error messages.

---

**BWB00046 Failed read of build parms**

**Explanation:** The temporary dataset containing the build parameters was allocated but an error occurred while reading or the dataset was empty.

**User Response:** The Systems programmer should review the operations log for further explanation of this error.

---

**BWB00047 Warning - Unable to allocate build messages data set**

**Explanation:** The specified Build message dataset could not be allocated. Processing continues.

**User Response:** Review the Build messages dataset that was user specified from the Build request. Review MVS SYSLOG for any security violations.

---

**BWB00048 Warning - Unable to allocate build report data set**

**Explanation:** The specified Build report dataset could not be allocated. Processing continues.

**User Response:** Review the Build report dataset that was user specified from the Build request. Review MVS SYSLOG for any security violations

---

**BWB00049 Warning - Unable to allocate build list data set**

**Explanation:** The specified Build list dataset could not be allocated. Processing continues.

**User Response:** Review the Build list dataset that was user specified from the Build request. Review MVS SYSLOG for any security violations

---

**BWB00050 Warning - Unable to allocate build exit data set**

**Explanation:** The specified Build exit dataset could not be allocated. Processing continues.

**User Response:** Review the Build exit dataset that was user specified from the Build request. Review MVS SYSLOG for any security violations

---

**BWB00051 Build failed**

**Explanation:** The build request has failed

**User Response:** Review additional error messages and the operations log to determine error.

---

**BWB00052 Error reading build messages**

**Explanation:** The Build messages dataset could not be read.

**User Response:** Review operations log for successful dataset allocation.

---

**BWB00053 Error reading build report**

**Explanation:** The Build report dataset could not be read.

**User Response:** Review operations log for successful dataset allocation.

---

**BWB00054 Error reading build listing**

**Explanation:** The Build listing dataset could not be read.

**User Response:** Review operations log for successful dataset allocation.

---

---

**BWB00055 Error reading J2EEBLD report**

**Explanation:** The Build J2EEBLD report dataset could not be read.

**User Response:** Review operations log for successful dataset allocation.

---

**BWB00056 BATCH skeleton error (Administrator customization error)**

**Explanation:** The SCLM batch skeletons FLMDSU\$ FLMB\$ could not be included. Build processing terminates.

**User Response:** Review MSG BWB00057

---

**BWB00057 Check SCLM Developer Toolkit Skeleton concatenated in ISPSLIB as specified in file ISPF.conf**

**Explanation:** Extended messaging from MSG BWB00056.

**User Response:** The Systems programmer should check that the base SCLM skeletons are allocated to ISPSLIB in the HFS configuration file ISPF.conf

---

**BWB00058 No BATCH submission information returned**

**Explanation:** No BATCH Job information was returned or captured from TSO.

**User Response:** Review the MVS SYSLOG to determine if a batch job was submitted successfully or the Job resides in an SDSF queue

---

**BWB00059 \*\*\* Promote cancelled \*\*\***

**Explanation:** The Promote function has been cancelled.

**User Response:** Review MSG BWB00016

---

**BWB00060 Warning - Unable to allocate messages data set**

**Explanation:** The temporary dataset to receive SCLM messages USERID.VCM.TEMP.FLMMSG could not be allocated. Processing continues.

**User Response:** The Systems programmer should review the operations or MVS log for additional error messages.

---

**BWB00061 Failed allocation of promote parms DSN : data set name**

**Explanation:** The temporary dataset USERID.TEMP.VCMISPF containing the build parameters could not be allocated as DISP=SHR. Processing terminates.

**User Response:** The Systems programmer should review the operations log for additional error messages.

---

**BWB00062 Failed read of promote parms**

**Explanation:** The temporary dataset containing the build parameters was allocated but an error occurred while reading or the dataset was empty.

**User Response:** The Systems programmer should review the operations log for further explanation of this error.

---

**BWB00063 Warning - Unable to allocate promote messages data set**

**Explanation:** The specified Promote message dataset could not be allocated. Processing continues.

**User Response:** Review the Promote messages dataset that was user specified from the promote request. Review MVS SYSLOG for any security violations.

---

**BWB00064 Warning - Unable to allocate promote report data set**

**Explanation:** The specified Promote report dataset could not be allocated. Processing continues.

**User Response:** Review the Promote report dataset that was user specified from the promote request. Review MVS SYSLOG for any security violations

---

**BWB00065 Warning - Unable to allocate promote exit data set**

**Explanation:** The specified Promote exit dataset could not be allocated. Processing continues.

**User Response:** Review the Promote exit dataset that was user specified from the promote request. Review MVS SYSLOG for any security violations

---

**BWB00066 Warning - Unable to allocate Authcode messages data set**

**Explanation:** The temporary authcode messages dataset USERID.VCM.TEMP.AUTHMSG could not be allocated. Processing continues.

**User Response:** Review MVS SYSLOG for any security violations

---

**BWB00067 Ensure build was successful**

**Explanation:** Promote failed. Possible reason is invalid Build map.

**User Response:** Review previous build request or view build map.

## Messages and codes

---

**BWB00068** Breeze is configured for this project, check log for Breeze messages

**Explanation:** Informational message that the Breeze flag is set and to review additional Breeze messages.

**User Response:** None

---

**BWB00069** Error reading promote messages

**Explanation:** The Promote messages dataset could not be read.

**User Response:** Review operations log for successful dataset allocation.

---

**BWB00070** Error reading promote report

**Explanation:** The Promote report dataset could not be read.

**User Response:** Review operations log for successful dataset allocation.

---

**BWB00071** Populate view of project failed

**Explanation:** Either Project Initialization has failed or the development group specified is invalid for the project.

**User Response:** Review any additional SCLM messages in the operation log and check your development group, Project and filter parameters.

---

**BWB00072** Reading ARCHDEF directly as no BLDMAP found

**Explanation:** Populate project by archdef will generate the request using DBUTIL and the build map for the archdef. If no build map exists (i.e. the archdef has not been built) then members will be read directly from the archdef.

**User Response:** None

---

**BWB00073** Only members in lowest hierarchy (latest) listed

**Explanation:** Additional to MSG BWB00072. As there is no archdef build map from which to generate the report, the populate will only report on members at the lowest group in the hierarchy.

**User Response:** If not acceptable then use a populate project filter other than archdef or build the archdef first to populate full list.

---

**BWB00074** No Project view information returned

**Explanation:** No project information was returned using the specified filters.

**User Response:** Review your filter parameters.

---

---

**BWB00075** Review your filter parameters

**Explanation:** Information to MSG BWB00074.

**User Response:** None

---

**BWB00076** The following ARCHDEF include was not found in the hierarchy : *include name*

**Explanation:** An INCLD statement for a member was found in the selected archdef but the member was not found in any group up the development hierarchy.

**User Response:** If old or invalid member then remove from archdef.

---

**BWB00077** \*\*\* Update function failed \*\*\*

**Explanation:** The update function failed as the member could not be locked for edit/update.

**User Response:** Review SCLM status of member.

---

**BWB00078** Error returned on LOCK

**Explanation:** Unable to obtain lock on member for EDIT or Update.

Member may already be locked (checked out) by another user.

**User Response:** Review SCLM status of member.

---

**BWB00079** \*\*\* Update function cancelled \*\*\*

**Explanation:** Update is cancelled as member was not previously locked for edit.

**User Response:** Review SCLM status of member.

---

**BWB00080** Member not previously locked for edit

**Explanation:** informational

**User Response:** Retry function.

---

**BWB00081** \*\*\* Update function successful \*\*\*

**Explanation:** informational

**User Response:** None

---

**BWB00082** \*\*\* AUTHCODE retrieval failed \*\*\*

**Explanation:** Unable to retrieve authcode on selected member.

**User Response:** Review SCLM status of member.

Review any SCLM messages in operation log.

---

---

**BWB00083    \*\*\* AUTHCODE update failed \*\*\***

**Explanation:** The update of authcode on the member has failed. Processing terminates.

**User Response:** Review SCLM status of member.

Review any SCLM messages in operations log.

---

**BWB00084    \*\*\* VERINFO command failed \*\*\***

**Explanation:** The VERINFO request failed with a return code > 8.

**User Response:** Review any SCLM messages in operations log.

---

**BWB00085    No Version records were found  
                  matching criteria**

**Explanation:** Informational

**User Response:** None

---

**BWB00086    \*\*\* VERRECOV command failed \*\*\***

**Explanation:** A version recover request has failed with a return code > 0.

**User Response:** Review any SCLM messages in operations log.

---

**BWB00087    \*\*\* VERDEL command failed \*\*\***

**Explanation:** A version delete request has failed with return code > 0.

**User Response:** Review any SCLM messages in operations log.

---

**BWB00088    Severe error in catalog search routine**

**Explanation:** An error has occurred in the IGGCSI00 Catalog search program with a project list request.

**User Response:** The Systems programmer should review the operations and MVS log for further error messages. Retry request.

---

**BWB00089    Warning - No Projects returned on filter  
                  : project filter**

**Explanation:** Informational.

**User Response:** Review project filter request.

---

**BWB00090    Error reading translate table : file name**

**Explanation:** An error has occurred reading the translate table. Processing continues but there will be errors in the longname to shortname retrieval and updates.

**User Response:** The Systems Programmer should verify correct translate table name: CGI\_TRANTABLE

---

variable in the httpd.env configuration file.

Run the install IVP to also verify installation.

---

**BWB00091    Long/short name translation may be in  
                  error**

**Explanation:** A previous error with the Longname to shortname translation file has occurred.

**User Response:** The Systems programmer should review the operations log for further error messages.

---

**BWB00092    Error reading file : file name**

**Explanation:** The displayed HFS file contained the files to migrate could not be read. Migration terminates.

**User Response:** Review the operations log for further error messages.

---

**BWB00093    Error returned from SCLMINFO file  
                  allocation**

**Explanation:** Error on allocation of new temporary dataset userid.vcm.temp.projinf

DCB: SPACE(1,1,20) TRKS RECFM(FB) LRECL(40)  
BLKSIZE(27960) VIO

**User Response:** Review the MVS SYSLOG for additional messages for dataset allocation failure.

---

**BWB00094    Error returned from SCLMLOAD file  
                  allocation**

**Explanation:** Unable to allocate DISP=SHR the dataset Project.projdefs.load.

**User Response:** Determine the dataset Project.projdefs.load exists, where project is the project name specified.

---

**BWB00095    Error returned on call to ISRFLMGI**

**Explanation:** Unable to call ISPF/SCLM module ISRFLMGI for retrieving group information for project.

**User Response:** None

---

**BWB00096    Unable to re-allocate SCLMINFO (no  
                  groups returned)**

**Explanation:** Unable to allocate temporary dataset for project group information retrieval.

**User Response:** Review the operations log for further error messages.

---

## Messages and codes

---

**BWB00097**    **Unable to read SCLMINFO (no groups returned)**

**Explanation:** Unable to read allocated SCLMINFO temporary dataset. No project information will be returned.

**User Response:** Review the operations log for further error messages.

---

**BWB00098**    **Group list has failed**

**Explanation:** No group information for selected project is returned due to function failure.

**User Response:** Review the operations log for further error messages.

---

**BWB00099**    **Build map deleted for member : *member***

**Explanation:** Informational.

Delete request has deleted build map.

**User Response:** None

---

**BWB00100**    **Jobid must have valid Jobname in request**

**Explanation:** No Jobname was passed through in JOB status request with JOBID.

**User Response:** Retry with valid JOB Name specified.

---

**BWB00101**    **No Job details passed - Defaults to USERID**

**Explanation:** No Jobname or Jobid details were passed. Function will report on all jobs starting with USERID as Jobname.

**User Response:** None

---

**BWB00102**    **For job retrieval a valid Jobname and Jobid must be provided**

**Explanation:** No valid Jobname / Jobid was passed for Job output retrieval.

**User Response:** Retry with valid Jobname/Jobid.

---

**BWB00103**    **No job output found**

**Explanation:** The requested Batch job was not found on the SDSF queue.

**User Response:** Check on z/OS in SDSF if the batch job still resides on an output queue or has been purged.

---

---

**BWB00104**    **Warning - Refer to additional SCLM messages**

**Explanation:** Additional SCLM warning messages have been issued.

**User Response:** View additional SCLM messages in operations log.

---

**BWB00105**    **Error - SCLM is unable to load the SCLM table**

**Explanation:** Error on SCLMINFO call for project/Project definition.

**User Response:** Check Project and project definition are valid.

---

**BWB00106**    **Check that the following projdef is valid : *Project***

**Explanation:** Informational.

Extends MSG BWB00105.

**User Response:** Check Project and project definition are valid.

---

**BWB00107**    **Error - The maximum application ID limit was exceeded**

**Explanation:** SCLMINFO request has returned return code 12.

**User Response:** Check Project and project definition are valid. Inform SCLM administrator of error.

---

**BWB00108**    **Errors initializing project : *Project***

**Explanation:** Extends MSG BWB00107

**User Response:** Reference MSG BWB00107.

---

**BWB00109**    **Error - An invalid version of the SCLM table was loaded**

**Explanation:** SCLMINFO request has returned return code 16.

**User Response:** Check Project and project definition are valid. Inform SCLM administrator of error.

---

**BWB00110**    **Error - An invalid parameter list was passed**

**Explanation:** SCLMINFO request has returned return code 32.

**User Response:** Check Project and project definition are valid. Inform SCLM administrator of error.

---



---

**BWB00111**    **Error - Refer to SCLM messages manual on SCLMINFO codes**

**Explanation:** The SCLM messages manual will give additional information on the SCLMINFO return codes.

**User Response:** Review the SCLM messages manual.

---

**BWB00112**    **No project specific entries in project config file : *file name***

**Explanation:** Informational: The SITE.conf file has not been tailored for use.

**User Response:** None

---

**BWB00113**    **Failed allocation of migrate parms DSN : *data set name***

**Explanation:** The Temporary MIGRATE dataset USERID.TEMP.MIGRATE.VCMISPF could not be allocated DISP=SHR. Processing terminates.

**User Response:** The Systems programmer should review the operations log for additional error messages.

---

**BWB00114**    **Failed read of migrate parms**

**Explanation:** Error reading allocated parameter dataset.

**User Response:** The Systems programmer should review the operations log for additional error messages

---

**BWB00115**    **Error on directory : *directory name***

**Explanation:** Error in creating or locating specified directory in HFS which is used to process the current function.

**User Response:** The Systems programmer should review the operations log for additional error messages

---

**BWB00116**    **PUT command failed for the following : *member info***

**Explanation:** A copy of a member from an SCLM dataset into a HFS directory has failed.

**User Response:** Check SCLM status of member.

Review the operations log for additional error messages

---

**BWB00117**    **Error threshold of 5 errors reached in copy**

**Explanation:** An error threshold of 5 bad member copies between SCLM and the HFS directory has occurred in the Java/J2ee build translators. Processing terminates.

**User Response:** Review the operations log for additional error messages.

Rectify problem and retry function request.

---



---

**BWB00118**    **Errors in code page conversions - Review LOG**

**Explanation:** Errors have occurred in the ASCII / EBCDIC codepage conversions.

**User Response:** Review the operations log for additional error messages.

---

**BWB00119**    **JAR Failed on following file : *file name***

**Explanation:** An error has occurred in creating a java JAR file. This function uses java to JAR up a zip file for transferring files across the network.

**User Response:** Review the operations log for additional error messages.

The Systems Programmer should ensure a valid java path exists in httpd.env and check for space problems within the HFS directory WORKAREA.

---

**BWB00120**    **JAVA PATH in httpd.env file may not be valid. Check with your Administrator**

**Explanation:** An error has occurred is issuing a JAVA command.

**User Response:** The Systems Programmer should ensure a valid java path exists in httpd.env for the HTTP server.

---

**BWB00121**    **Error found in DBUTIL report - Review LOG**

**Explanation:** A failure has occurred with an SCLM DBUTIL request for producing a member list. Further error messages may be displayed.

**User Response:** Review the operations log for additional error messages.

---

**BWB00122**    **No project information returned by filter**

**Explanation:** The USER specified filter list has returned no project information.

**User Response:** Review your filter parameters and retry.

---

**BWB00123**    **SCLM import successful for the following number of members : *number of members***

**Explanation:** Informational

**User Response:** None

---

## Messages and codes

---

**BWB00124** No files to migrate specified in migrate file : *file name*

**Explanation:** No files were found to be migrated.

**User Response:** If an error review the operations log for additional error messages.

---

**BWB00125** Invalid Host name convention for : *long name*

**Explanation:** The file to be stored is not defined as a long language type but is not a valid Host name (8 characters or less). This file will not be stored in SCLM.

**User Response:** If the file needs to be stored as a long language type i.e. converted to a short name then ensure the language type matches the LONGLANG keywords in TRANSLATE.conf (see the administrator).

---

**BWB00126** Invalid shortname conversion for : *long name*

**Explanation:** An error occurred within the translate file in creating a shortname.

**User Response:** Review the operations log for further errors. Report this problem to the systems programmer or SCLM administrator.

---

**BWB00127** Check access permissions on translate table : *file name*

**Explanation:** Redundant message.

**User Response:** Ignore

---

**BWB00128** Error threshold reached in shortname

**Explanation:** The error threshold of 5 shortname error conversions has been reached, the migrate process terminates.

**User Response:** Review the operations log for further errors. Report this problem to the systems programmer or SCLM administrator.

---

**BWB00129** Member being migrated already exists - not migrated. Member : *member*

**Explanation:** An attempt to migrate in a member was made where the member already exists in the group hierarchy and the force option was not used.

**User Response:** If needed members can be force migrated setting the 'force' flag on from the migrate panel. Warning: this is not advised as normal checkout/checkin processing should be used as existing members will be overlaid.

---

**BWB00130** Copy failed : *data set name 1 to data set name 2*

**Explanation:** A copy of an SCLM member from the HFS to an SCLM dataset has failed.

**User Response:** The Systems Programmer should check the output dataset is valid and there are no space problems or security violations.

---

**BWB00131** Check MVS SYSLOG for possible security violation

**Explanation:** Informational: extends BWB00130.

**User Response:** Inform Systems Programmer of this message.

---

**BWB00132** Error threshold of 20 errors reached in copy

**Explanation:** For a migrate or import the error threshold of 20 has been reached for copy failures from HFS to/from SCLM. Processing terminates.

**User Response:** Review the operations log for further errors. Report this problem to the systems programmer or SCLM administrator.

---

**BWB00133** Error reading migrate Messages

**Explanation:** In Migrate processing an error occurred when reading the Messages dataset. Processing continues but Migrate messages will not be included in the display output.

**User Response:** Review the operations log for additional error messages.

---

**BWB00134** SCLM migration successful for the following number of files : *number of files*

**Explanation:** Informational

**User Response:** None

---

**BWB00135** Migration message data set : *data set name*

**Explanation:** Informational

**User Response:** None

---

**BWB00136** Migration report data set : *data set name*

**Explanation:** Informational

**User Response:** None

---

---

**BWB00137 SCLM migration unsuccessful for the following number of files : *number of files***

**Explanation:** Errors occurred with a number of files during migration processing and are listed here. Migration may have only partially succeeded for some files/members.

**User Response:** Review the operations log for additional error messages.

---

**BWB00138 Refer to migration message data set : *data set name***

**Explanation:** Migration messages have been written to this dataset on z/OS for reference.

**User Response:** Review the migration dataset if required.

---

**BWB00139 SCLM Update error for project archdef : *archdef name***

**Explanation:** An archdef was selected to add migrating members to but the SCLM update to the archdef has failed.

**User Response:** Check the archdef selected within SCLM for errors and review the operations log for further errors. Archdef may have to be manually updated with members if required.

---

**BWB00140 Following project ARCHDEF updated : *archdef name***

**Explanation:** Informational:

Indicated archdef has been updated with migration members.

**User Response:** None

---

**BWB00141 Error occurred reading ARCHDEF : *archdef name***

**Explanation:** The archdef member to be updated with migrating members already exists but the read has failed. Migration continues without archdef update.

**User Response:** Check the validity of the selected archdef. Archdef may have to be manually updated with members if required.

---

**BWB00142 Error occurred updating ARCHDEF : *archdef name***

**Explanation:** An archdef was selected to add migrating members to but the SCLM update to the archdef has failed.

Bad allocation of archdef member at the development level.

**User Response:** Check the archdef selected within SCLM for errors and review the operations log for further errors. Archdef may have to be manually updated with members if required.

---

**BWB00143 UNJAR failed on following file : *file name***

**Explanation:** An error has occurred in unzipping a file using the java JAR command. This function uses java to UNJAR a zip file for transferring files across the network.

**User Response:** Review the operations log for additional error messages.

The Systems Programmer should ensure a valid java path exists in httpd.env and check for space problems within the HFS directory WORKAREA.

---

**BWB00144 Check CGI-VCMPATH variable in httpd.env with your administrator**

**Explanation:** The VCMPATH specified in the httpd.env file may not be correct.

The Environment variable CGI\_VCMPATH determines the HOME directory path where the configuration files reside for SCLM Developer Toolkit.

This was determined by the install directory specified in install job BWBINST1. By default /var/SCLMDT.

**User Response:** Systems programmer to investigate customization.

---

**BWB00145 J2EPUT in httpd.conf must be CGI-VCMPATH/WORKAREA/\***

**Explanation:** The httpd.conf directive must be correct for J2EPUT.

**User Response:** Systems programmer to investigate customization

---

**BWB00146 Error reading listing file : *file name***

**Explanation:** Files to be migrated are contained in a HFS listing file. An error occurred while reading this file and migration processing terminates.

**User Response:** Systems programmer should check HFS file permissions for specified user and available space.

---

**BWB00147 Error in ASCII/EBCDIC conversion : *file name***

**Explanation:** An error has occurred during an ASCII to EBCDIC file conversion. DT uses the iconv routine within HFS to codepage convert.

**User Response:** Systems programmer should check ASCII/EBCDIC customization parameters in

## Messages and codes

TRANSLATE.conf. Check file being converted for special characters or empty file.

---

**BWB00148 Invalid hostname structure (directory/filename)**

**Explanation:** Host file structure does not contain a '/' as first character.

**User Response:** Review operations log to view Host File name passed to transfer routine.

---

**BWB00149 Invalid direction : *direction***

**Explanation:** The direction keyword is not valid for file transfer. Valid direction keywords are TOHOST or FROMHOST.

**User Response:** Review operations log for direction keyword passed and retry.

---

**BWB00150 Invalid filetype : *file type***

**Explanation:** The filetype keyword for transfer is not valid. Valid filetype is BINARY or TEXT.

**User Response:** Review operations log for filetype keyword passed and retry.

---

**BWB00151 ZIP option only valid for TOHOST transfer**

**Explanation:** ZIP option (ZIP = yes) is only valid for transfer direction TOHOST.

**User Response:** Retry operation without ZIP flag set if transferring from host.

---

**BWB00152 ZIP option only valid for BINARY transfer**

**Explanation:** ZIP = YES has been set for transferring a file other than of filetype BINARY. This is not valid.

**User Response:** Retry operation without ZIP flag set if transferring text file.

---

**BWB00153 Check valid host name or file permissions**

**Explanation:** Accompanies MSG BWB00130. Copy has failed.

**User Response:** Review that the file permissions on the HFS directories or Host file name are valid.

---

**BWB00154 Unable to locate host directory : *host directory***

**Explanation:** The host directory is part of the HOSTFILE name specified. The HFS directory does not exist.

**User Response:** Systems programmer should check the HFS directory name specified.

---

**BWB00155 UNZIP Failed on following file : *host file***

**Explanation:** An unzip has failed on the transferred file. SCLM DT uses the java JAR command to unzip (unjar) this file.

**User Response:** The Systems Programmer should ensure a valid java path exists in httpd.env and check for space problems within the HFS directory WORKAREA.

---

**BWB00156 ZIP File copied & unzipped into directory : *directory***

**Explanation:** Informational

**User Response:** None

---

**BWB00157 Unable to delete HFS file : *file name***

**Explanation:** The cleanup routine to delete HFS workarea files after operation has completed has failed.

**User Response:** Systems programmer should check listed file and delete/remove manually if desired.

---

**BWB00158 Select DETAILS>> button for build messages, reports, listings**

**Explanation:** Informational

**User Response:** Select DETAILS to view build messages, reports and listings.

---

**BWB00159 Select DETAILS>> button for promote messages and reports**

**Explanation:** Informational

**User Response:** Select DETAILS to view build messages, reports and listings.

---

**BWB00160 Failed read of migrate job dataset**

**Explanation:** The temporary skeleton file that is used for creating the batch job could not be read: USERID.TEMP.DWSKEL.

Migration processing terminates.

**User Response:** Review the operations log for additional error messages.

---

**BWB00161 \*\*\* Temporary recover data set allocation failed \*\*\***

**Explanation:** In version processing a temporary recovery dataset: USERID.VCM.TEMP.RECOVER could not be allocated.

**User Response:** Systems programmer should review

the MVS log for any dataset allocation failures.

---

### BWB00162 ANT build failure

**Explanation:** In a Java or J2EE build an error has occurred running the ANT script in HFS. This may just be Java compile errors.

**User Response:** Review the ANT build listing returned in the operations log to resolve any build errors.

---

### BWB00163 Review ANT Listing in Log

**Explanation:** Informational

**User Response:** Review listing.

---

### BWB00164 Review failure - Build continues

**Explanation:** A copy of a member from an MVS dataset to a HFS file has failed. Build processing continues.

**User Response:** Review the operations log for further error messages.

---

### BWB00165 Member account record deleted from development group

**Explanation:** During a checkout (lock) an SCLM member account record was created in the development group. The unlock or lock failure results in the account record being deleted.

**User Response:** None

---

### BWB00166 ADD new member cancelled as member exists at group : *group*

**Explanation:** An add new member was attempted but the member already resides up the group hierarchy chain. Processing terminates.

**User Response:** None

---

### BWB00167 Error in shortname translation

**Explanation:** An error has occurred in translating the longname file to an SCLM host shortname.

**User Response:** Review the operations log for further error messages.

---

### BWB00168 Ensure check-in member was not an empty file

**Explanation:** A codepage translation error occurred when saving a file/member. Ensure the file saved was not an empty file.

**User Response:** Check file not empty otherwise review operations log for further error messages.

---

### BWB00169 Member being migrated already exists - not migrated. Member : *member*

**Explanation:** A member was selected to be migrated but already exists in the group hierarchy chain.

**User Response:** Use normal EDIT/checkout processing, otherwise use the migrate command with the force flag set. Warning this is not advised as previous versions of the member may be overwritten.

---

### BWB00170 Error threshold of 5 errors reached in ASCII/EBCDIC conversion

**Explanation:** An error threshold of 5 members being migrated has resulted in codepage conversion errors. Migrate processing terminates.

**User Response:** Review the operations log to determine errors with migrated members.

---

### BWB00171 No members selected to copy and migrate

**Explanation:** There were no valid members selected to be migrated into SCLM. Processing terminates.

**User Response:** If this is an error then review the operations log for further error messages.

---

### BWB00172 Promote has Failed - Check Promote messages

**Explanation:** The promote has failed. Promote messages will be returned in the log or reside in the promote messages dataset if specified in the request.

**User Response:** Review the failing messages.

---

### BWB00173 ERROR - Unable to allocate temp translate data set

**Explanation:** For migrate and import the files requiring long/short name conversion are written to a temporary sequential dataset DD LSTRNPRC of attributes SPACE(1,1) RECFM=VB LRECL=1036 UNIT=VIO. This dataset could not be allocated. Processing terminates.

**User Response:** Systems Programmer should check the MVS SYSLOG for any dataset allocation errors or violations.

---

### BWB00174 ERROR - In translate table routine : FLMLSTRAN

**Explanation:** A shortname longname translation has occurred calling the translate module FLMLSTRN. Additional error messages will be displayed.

**User Response:** Review the operations log for additional error messages and reasons provided.

## Messages and codes

---

**BWB00175** No associated longnames will be displayed

**Explanation:** A previous error in retrieving longnames has occurred and any longnames associated with an SCLM host shortname will not be displayed in the project view.

**User Response:** Review the operations log for other error messages pertaining to translation services.

---

**BWB00176** WARNING in EBCDIC/ASCII conversion. Unprintable characters or empty file

**Explanation:** An EBCDIC to ASCII codepage translation error has occurred. Likely causes are unprintable special characters or an empty file.

**User Response:** View the member being translated. Special characters or null characters (X'00') may cause this error when browsing/editing a file.

---

## Notices

This information was developed for products and services offered in the U.S.A.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or service is not intended to state or imply that only that IBM product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing  
IBM Corporation  
North Castle Drive  
Armonk, NY 10504-1785  
U.S.A.

Licensees of this program who wish to have information about it for the purpose of enabling: (i) the exchange of information between independently created programs and other programs (including this one) and (ii) the mutual use of the information which has been exchanged, should contact:

IBM Corporation  
Mail Station P300  
2455 South Road  
Poughkeepsie New York 12601-5400  
U.S.A.

Such information may be available, subject to appropriate terms and conditions, including in some cases, payment of a fee.

The licensed program described in this document and all licensed material available for it are provided by IBM under terms of the IBM Customer Agreement, IBM International Program License Agreement or any equivalent agreement between us.

For license inquiries regarding double-byte (DBCS) information, contact the IBM Intellectual Property Department in your country or send inquiries, in writing, to:

IBM World Trade Asia Corporation  
Licensing  
2-31 Roppongi 3-chome, Minato-ku  
Tokyo 106-0032, Japan

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR

## Notices

PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this IBM product and use of those Web sites is at your own risk.

If you are viewing this information softcopy, the photographs and color illustrations may not appear.

---

## Trademarks

The following are trademarks of International Business Machines Corporation in the United States, or other countries, or both.

AIX  
Domino  
IBM  
Library Reader  
Lotus  
MVS  
OS/390  
RACF  
Redbooks  
S/390  
WebSphere  
z/OS

Java and all Java-based trademarks are trademarks of Sun Microsystems, Inc. in the United States, other countries, or both.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

Windows is a trademark of Microsoft Corporation in the United States, other countries, or both.

Other company, product, and service names may be trademarks or service marks of others.



---

# Index

## Special characters

- \$GLOBAL member
  - CLASSPATH\_JARS parameter 25
  - creating different settings 29
  - providing information to Java/J2EE
    - build processes 28
  - set at highest level for all groups 29

## A

- AIX
  - installing Eclipse-based client 15
- ANT
  - customizing 9
  - installing 9
  - testing initialization 10
  - translating ASCII to EBCDIC 9
  - web address 9
- ANT\_BIN global variable
  - HFS directory path 28
- ARCHDEF SCLM type 26
- ASCII
  - See ASCII/EBCDIC translation
- ASCII storage options 26
- ASCII/EBCDIC conversion
  - See ASCII/EBCDIC translation
- ASCII/EBCDIC translation
  - See also IBM-1047
  - See also ISO8859-1
  - code pages in use 3
  - converting ANT text files and scripts 9
  - files stored in ASCII or EBCDIC 26
  - language translators 27
  - non-standard 2
  - non-standard codepage translation 5
  - source or components requiring 25
  - translation of part 4
  - translation to host 3

## B

- BATCHBUILDn option 32
- BATCHMIGRATEn option 32
- BATCHPROMOTEn option 32
- BINARY language translator 27
- BUILDAPPROVER option 31
- Builds
  - configuration files 33
  - CRON-initiated 33
- BWBCPANT
  - ANT install member 9
- BWBCRON1 sample member 33
- BWBCRONB sample member 33
- BWBCRONP sample member 33
- BWBGLOB sample 28
- BWBHTTTPC member 2
- BWBHTTPE member 2
- BWBINST1 install JCL
  - tasks performed by 1

- BWBINST1 sample configuration file 5
- BWBPROJ member
  - holding sample Project config file 30
- BWBBSITE sample 29
- BWBTRAN1 language translator 23
- BWBTRAN2 language translator 23
- BWBTRAN3 language translator 23
- BWBTRANJ language translator 23
- BWBTRANT
  - sample translation script 9

## C

- CCODE option 31
- classpath dependencies 25
- CLASSPATH\_JARS global variable
  - HFS classpath directory 28
- CODEPAGE keyword 3
- codepages
  - See ASCII/EBCDIC conversion
- codes 41
- CONFIG directory
  - creating 1
- CONFIG/PROJECT directory
  - See PROJECT directory
- configuration files
  - customizing 2
  - HTTP server 5
- conversion
  - See ASCII/EBCDIC translation
- CRON
  - Build job execution 34
  - Build job samples 34
  - CRON-initiated Builds 33
  - CRON-initiated Promotes 33
- CRONTAB file 34
- customization
  - checking 10

## E

- EBCDIC
  - See ASCII/EBCDIC translation
- EBCDIC storage options 26
- Eclipse-based client
  - downloading 14
  - installing 14
- Exec directives
  - in httpd.conf file 5

## F

- FINDLONG processing 38
- FINDSHORT processing 38
- FLMLSTRN
  - SCLM translate program 37
- FOREGROUNDBUILD option 31
- FOREGROUNDPROMOTE option 32

## G

- global variables
  - ANT\_BIN 28
  - CLASSPATH\_JARS 28
  - HOMEDIR 28
  - JAVA\_BIN 28
  - TRANTABLE 29

## H

- HFS
  - PATH variable 34
  - set up Build and Promote
    - configuration files 33
    - STEPLIB variable 34
- HFS install directory
  - downloading client package 14
- HFS mount point
  - check if connection has failed 12
- Hierarchical File System
  - See HFS
- HOMEDIR global variable
  - install home directory 28
- HTTP server
  - check if connection has failed 11
  - configuration file
    - customization 5
    - location 5
  - configuring 4
  - customizing existing server 6
  - default port configuration 4
  - environment file
    - customization 5
    - location 5
  - JCL/STARTED TASK
    - customization 6
  - logon prompt 10
  - owning userid 6
  - port 5
  - sample configuration files 2, 5
  - starting 7
  - testing connection to 13
- httpd.conf
  - copied into CONFIG directory 2
  - customizing 5
  - sample HTTP configuration file 5
- httpd.env
  - copied into CONFIG directory 2
  - customizing 5

## I

- IBM z/OS HTTP server
  - See HTTP server
- IBM-1047
  - default EBCDIC codepage 2
- IMPORT function
  - improve long/short name record processing 39
- IMPORT processing 39

- install directory
  - recommended for configuration files 2
- install JCL
  - running 1
- installation
  - checking 10
  - overview xiii
- InstallShield
  - installing Eclipse-based client 15
- ISO8859-1
  - default ASCII codepage 2
- ISPF configuration file
  - customizing 2
- ISPF.conf
  - customizing 2
  - location 2
- IVP process
  - running to check install and customization 10

## J

- J2EE
  - See also* JAVA/J2EE
  - build 24
  - sample language translator 23
- J2EEBIN language translator 27
- J2EEBIN SCLM language translator 25
- J2EEBLD SCLM language translator 25
- J2EEBLD SCLM type 26
- J2EEEAR SCLM type 26
- J2EELIST SCLM type 26
- J2EEPART language translator 27
- J2EEPART SCLM language translator 25
- J2EEWAR SCLM type 26
- Java
  - See also* JAVA/J2EE
  - build 23
  - level required 1
- JAVA language translator 27
- JAVA\_SCLM language translator 25
- JAVA\_BIN
  - HFS directory path 28
- JAVA\_HOME environment variable 10
- JAVA/J2EE
  - accessing language translator modules 23
  - ANT installation and customization 9
  - build summary 23
  - language translators 23
  - sample project definition 23
  - SCLM types to support 25
  - use of WORKAREA 2
- JAVABIN language translator 27
- JAVABIN SCLM language translator 25
- JAVABLD SCLM language translator 25
- JAVACLAS SCLM type 26
- JAVAJAR SCLM type 26
- JVALIST SCLM type 26

## L

- language translators 27
  - JAVA/J2EE support 23

- license inquiry 55
- Linux
  - installing Eclipse-based client 15
- LOGS directory
  - creating 1
  - read/write access 6
- long name
  - See* long/short name
- long/short filename
  - See* long/short name
- long/short name
  - configuring table VSAM file 7
  - conversion utility 37
  - multiple record processing 39
  - single record processing 38
  - translation parameters 38
  - translation table 37
- long/short name translation
  - REXX sample 40
- LONGLANG keyword 3

## M

- messages 41
- MIGRATE function
  - improve long/short name record processing 39
- MIGRATE processing 39

## O

- options
  - ASCII storage 26
  - definition 31
  - EBCDIC storage 26
  - in sample project specific file 30
  - in sample SITE specific file 29
  - project 29
  - SITE 29
  - that can be configured 29

## P

- PASS directive
  - check if connection has failed 12
- Pass directives
  - in httpd.conf file 5
- PATH
  - requirements 33
- port
  - See* port number
- port number
  - changing 4
  - default HTTP server 4
  - in httpd.conf file 5
  - reserving xiii
  - used in location URL 10
  - used to check connection to HTTP server 13
- Project config file
  - sample 30
- PROJECT directory
  - creating 1
  - storage area for options 29
- project.conf
  - creating 30

- PROMOTEAPPROVER option 31
- Promotes
  - configuration files 33
  - CRON-initiated 33

## R

- RACF
  - considerations 6
  - create OMVS segment for userid 6
  - individual user requirements xiii
- Resource Access Control Facility
  - See* RACF
- REXX
  - CRON build exec sample 34
  - host interface call sample 33
  - long/short name translation sample 40
  - required software 6
  - set up Build parameter input string sample 33
  - set up Promote parameter input string sample 33

## S

- samples
  - CRON-initiated Builds and Promotes 33
- SBWBSAMP library
  - BWBGLOB sample 28
  - BWBPROJ sample 30
  - BWBSITE sample 29
  - contents 33
  - source of sample translators 23
- SCLM administrator
  - SCLM customization 23
- SCLM customization
  - by SCLM administrator 23
- SCLM Developer Toolkit
  - customizing 1
  - installing 1
- SCLM language definitions 24
- SCLM Translate program
  - technical summary 37
- SCLM types 25
- security
  - considerations xiii
- short name
  - See* long/short name
- SITE.conf
  - creating 29
  - site configuration file 29
- SMP/E installation xiii
- software requirements 1
- STEPLIB
  - requirements 33
- storage options
  - See* options

## T

- TCP/IP
  - considerations xiii
- TCPIP.DATA
  - for HTTP server xiii

- TEXT language translator 27
- TRANLANG keyword 3
- TRANSLATE configuration file
  - usage scenario 4
- TRANSLATE processing 39
- TRANSLATE.conf
  - contents 3
  - creating 2
  - customizing 2
  - location 2
- translation
  - long/short file name 37
- TRANTABLE global variable
  - VSAM file 29

## U

- UNIX System Services
  - initiate builds and promotes via
    - CRON 33
  - JAVA\_HOME environment
    - variable 10
  - pipe symbol 34
- USS
  - See* UNIX System Services

## W

- WebSphere Studio Workbench
  - See* WSWB
- WORKAREA directory
  - creating 1
  - purpose 2
  - read/write access 2
- WSWB
  - location to install 17

## Z

- z/OS
  - software requirements 1
- z/OS HTTP server
  - See* HTTP server
- z/OS UNIX System Services
  - See* UNIX System Services







Program Number: 5655M9900

Printed in USA

SC31-6899-00

